

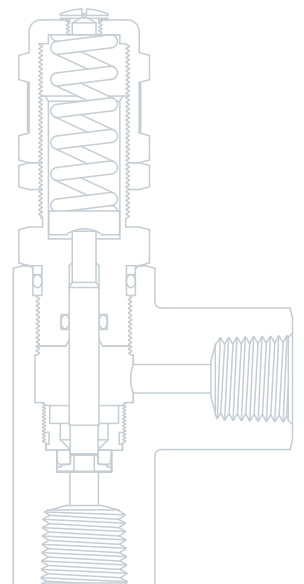


FITOK

Full Technical Catalog
For Specialty Gas Application

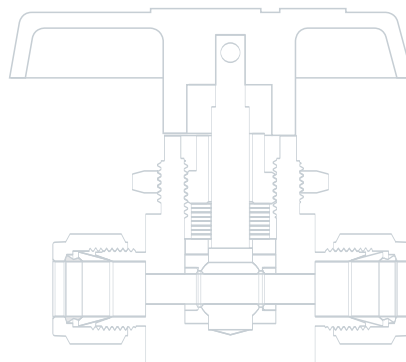

Cylinder Pressure Regulators

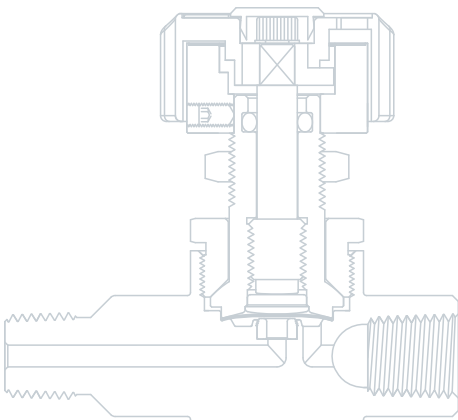

Line Pressure Regulators




Point-of-use Panels



Pressure Control Panels



Purge Assemblies

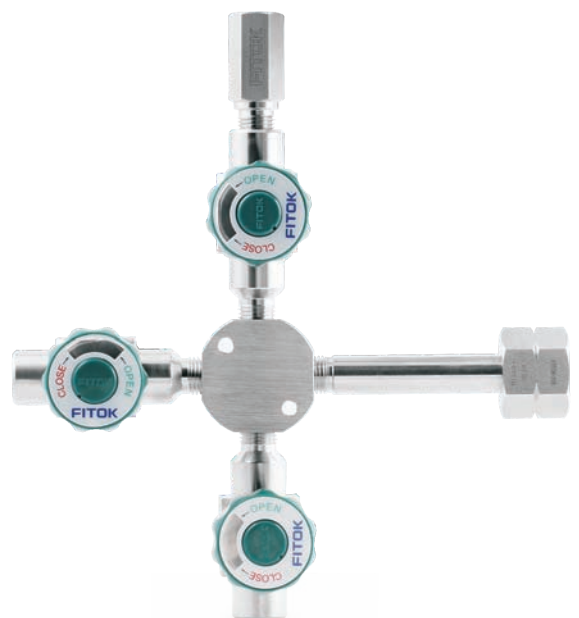

Diaphragm Valves



Ball Valves



Needle Valves



Check Valves



Relief Valves



Filters



Fittings



Cylinder Connections



A

Gas Control Equipment

B

Related Products

C

Technical References



Gas Control Equipment



Contents

General Introduction	A-03
-----------------------------	-------------

Cylinder Pressure Regulators

FCR-1 Series General Diaphragm Regulators	A-08
FCR-1S Series Sensitive Diaphragm Regulators	A-11
FCR-2 Series High Pressure Piston Regulators	A-14
FCR-1D Series Dual-stage Diaphragm Regulators	A-17

Line Pressure Regulators

FLR-1 Series Compact Diaphragm Regulators	A-20
FLR-2 Series Piston Regulators	A-23
FLR-3 Series Medium Flow Diaphragm Regulators	A-26
FLR-5 Series High Flow Diaphragm Regulators	A-29
FBR-1 Series Miniature Piston Regulators	A-32
HPR-10 Series High Pressure Piston Regulator	A-35
HPL-06 Series High Pressure High Flow Regulators	A-38

Pressure Control Panels

FSR-1 Series Pressure Control Panels for Single Cylinder	A-41
FSR-2 Series High Pressure Control Panels for Single Cylinder	A-44

Changeover Systems

FDR-1 Series Manual Changeover System (up to 500 psig)	A-47
FDR-2 Series Manual Changeover System (up to 2500 psig)	A-50
FDR-1L Series Automatic Changeover System without Line Pressure Regulator	A-53
FDR-1T Series Automatic Changeover System with Line Pressure Regulator	A-57

Point-of-use Panels

FPR-1 Series Compact Regulators for Low Pressure	A-61
FPR-1S Series Sensitive Regulators for Low Pressure	A-64

Back Pressure Regulators


BPR-1 Series Back Pressure Diaphragm Regulators	A-67
BPR-2 Series Back Pressure Piston Regulators	A-70
BPR-3 Series Back Pressure Piston Regulators	A-74

General Introduction

Typical Construction

Diaphragm Regulators

A pressure reducing regulator is positioned where the high pressure of a medium needs to be reduced and maintained to a lower and stable level. By turning the adjustment handle, the tension of range spring would be changed so as to control the outlet pressure of the regulator.

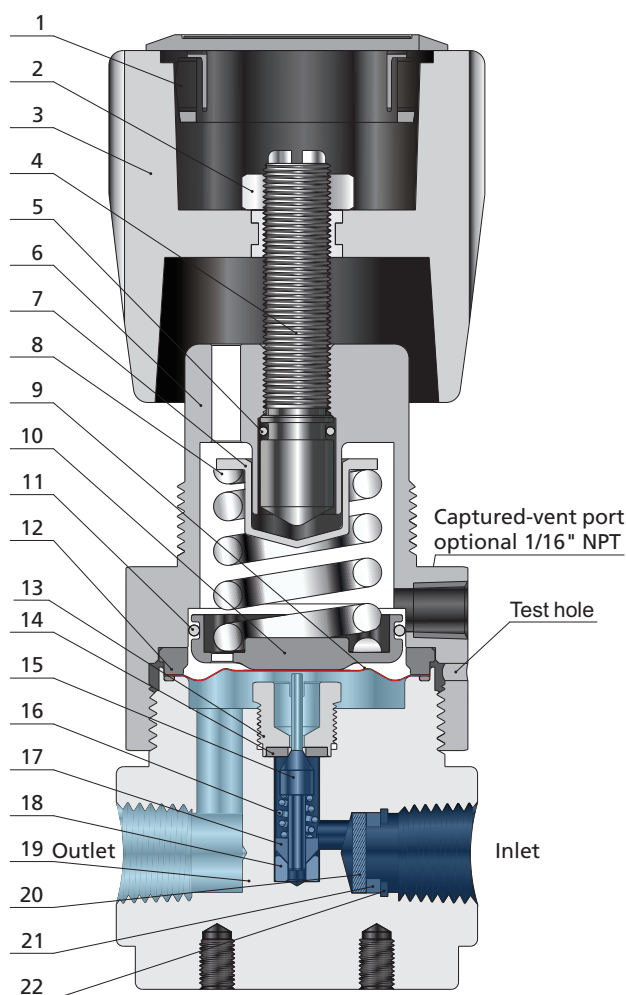

Component		Material/Specification
1	Hole Plug	ABS
2	Stem Nut	C36000/ASTM B16
3	Knob Handle	ABS
4	Stem	C36000/ASTM B16
5	O-ring	Buna-N
6	Bonnet	304 SS/ASTM A479 or Brass
7	Spring Button	304 SS/ASTM A276
8	Range Spring	Alloy
9	Diaphragm	Hastelloy
10	Spring Plate	Aluminium alloy
11	O-ring	Buna-N
12	Seal Ring	304 SS/ASTM A479
13	Seat Retainer	316L SS/ASTM A276
14	Seat	PCTFE/ASTM D1430
15	Lift Poppet	316L SS/ASTM A276
16	Poppet Spring	Alloy X-750
17	Poppet Damper	PTFE/ASTM D1710
18	Friction Sleeve	316L SS/ASTM A276
19	Body	316L SS/ASTM A479 or Brass
20	Filter	316L SS
21	Filter Ring	PTFE/ASTM D1710
22	Retaining Ring	316L SS

Features


- ⦿ Convoluted diaphragm to provide accurate pressure adjustment
- ⦿ Spring loaded
- ⦿ 316L SS filter installed at inlet
- ⦿ Some regulators are fitted with captured-vent, such as FCR-1S, FLR-3 and FLR-5 series and self-venting FCR-2 and FLR-2 series
- ⦿ Users can connect the captured vent port so that the media can be contained or redirected if self-vented or the diaphragm accidentally breaks
- ⦿ Optional sealing material for different gases and purity class
- ⦿ Hastelloy diaphragm to provide higher burst pressure and corrosion resistance
- ⦿ Low leak rates
 - Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 - External: $\leq 1 \times 10^{-9}$ mbar·l/s helium

A-04 Gas Control Equipment

When the regulator is in operation, the inlet pressure (F_i) plus the out pressure (F_o) should be equal to the downward force on the diaphragm by the compressed spring (F_s), namely $F_i + F_o = F_s$ to reach an equilibrium.

When the outlet pressure (F_o) is lower than the set pressure, the poppet would be pushed away from the seat by the excess downward force, allowing more high pressure gas to enter the chamber so as to increase the outlet pressure.



As soon as the outlet pressure (F_o) exceeds the set pressure, the excess upstream force shall lift the poppet back to the seat to limit high pressure gas entering, so as to reduce the outlet pressure.

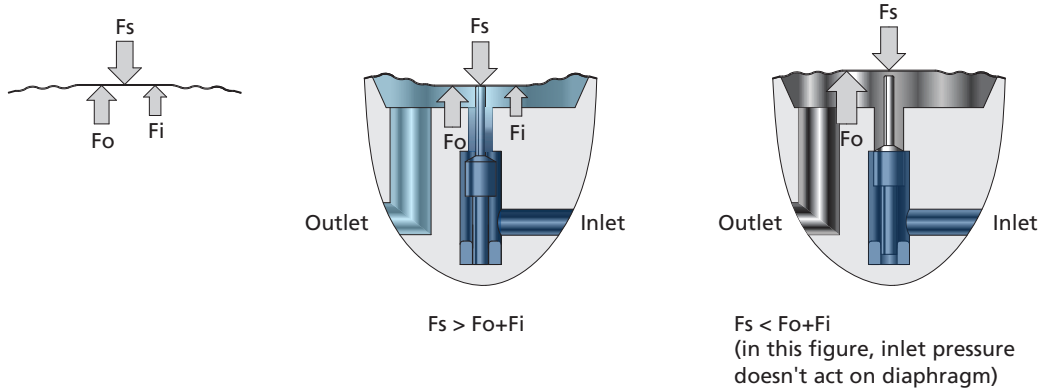

Dual-stage Diaphragm Regulators

When the inlet pressure (P_i) decreases, the outlet pressure (P_o) shall increase. Even though the increase may not be significant, the dual-stage regulator would be a better option when more stable pressure required, and the upstream pressure fluctuates violently.


The function of a dual-stage regulator is similar to that of two single-stage regulators in series. The 1st-stage regulator reduces the inlet pressure to an intermediate level for the 2nd-stage regulator to adjust to a constant output, which at the most extent ensures the stability of the outlet pressure.

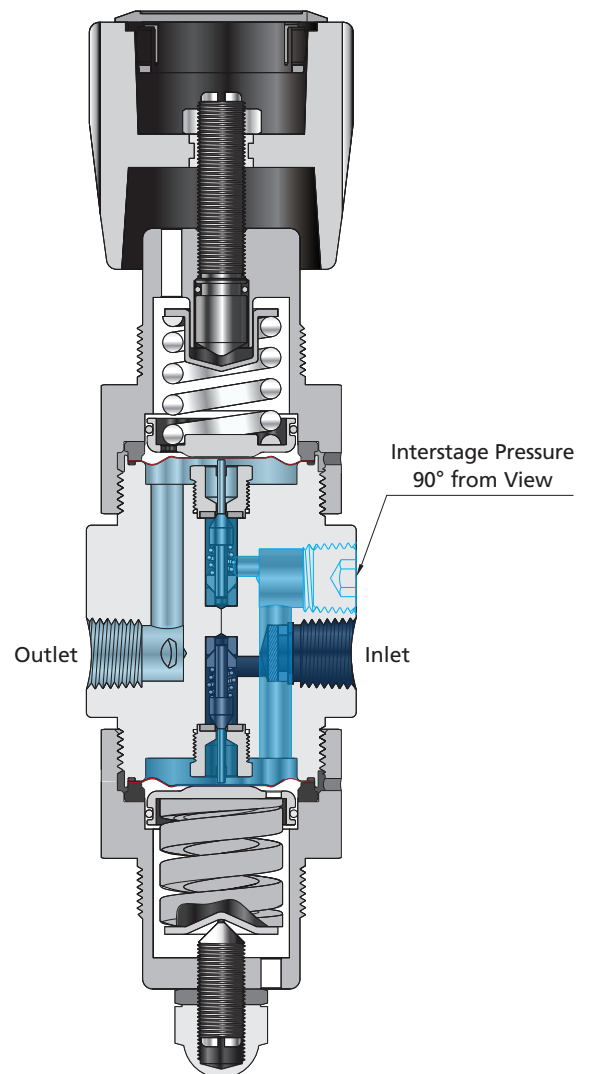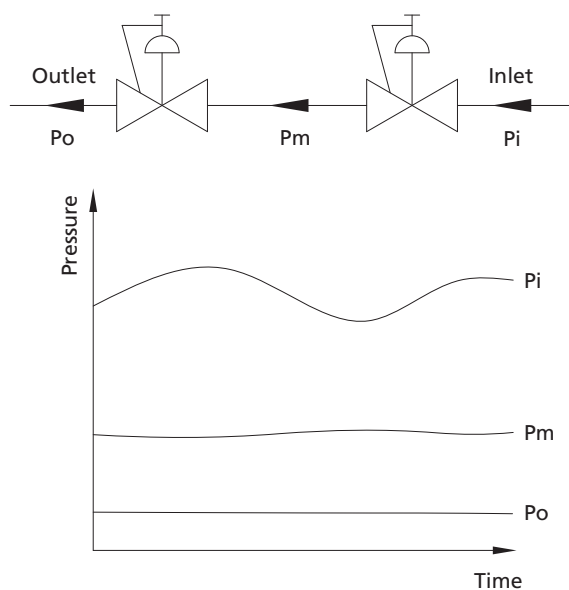

Piston Regulators

Although diaphragm regulators have many advantages such as precision, sealing effect, cleanliness and etc., in order to ensure sensitivity, the structural strength of the diaphragm regulators is low so as not being able to withstand high pressure. Therefore, it is recommended to utilize the piston regulators for high pressure applications.

A piston regulator has the same working principle as a diaphragm regulator. The key distinction is that the diaphragm is changed to a piston to satisfy the needs for high pressure applications. The inlet pressure of a piston regulator can reach 6000 psig. Its construction is simple and reliable with multiple options of O-rings to fulfill the various requirements of different media.

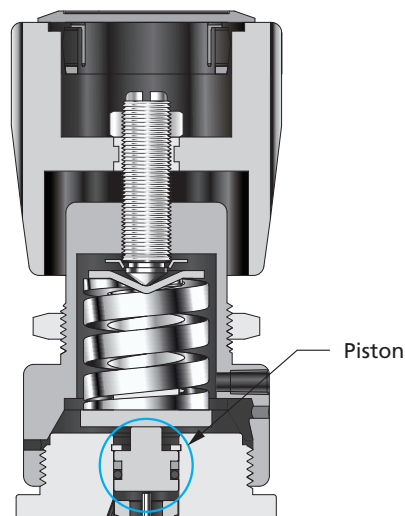

Series of Products

Cylinder Pressure Regulators (FCR)

Cylinder pressure regulators are designed to reduce the pressure of the cylinders to a lower level. The regulator is connected to the cylinder normally through a cylinder connection.

Line Pressure Regulators (FLR)

Line pressure regulators are used to further control the pressure in line.

Pressure Control Panels (FSR)

Pressure control panels are installed in the gas storage area (cylinder stock room or gas cabinet). They reduce cylinder or tank pressure to the desired line pressure for in-house use. Via the subsequent piping system, the gas will be guided to the point-of-use.

Changeover Systems (FDR)

There are manual changeover system and automatic changeover system.

Manual changeover system can connect with several independent gas sources at a time. When one gas source is depleted, it could be switched to another source quickly through a shutoff valve.


Automatic changeover system is installed onto gas pipelines which need continuous gas supply. It can connect with two independent gas sources at a time. When the gas source from one side is depleted, it can automatically switch to the gas source from the other side. Subsequently, replacing the exhausted gas source.

Point-of-use Panels (FPR)

Its function is to most precisely regulate the pressure and shut off at the point-of-use.

Products Practical Application

Gas Supply System

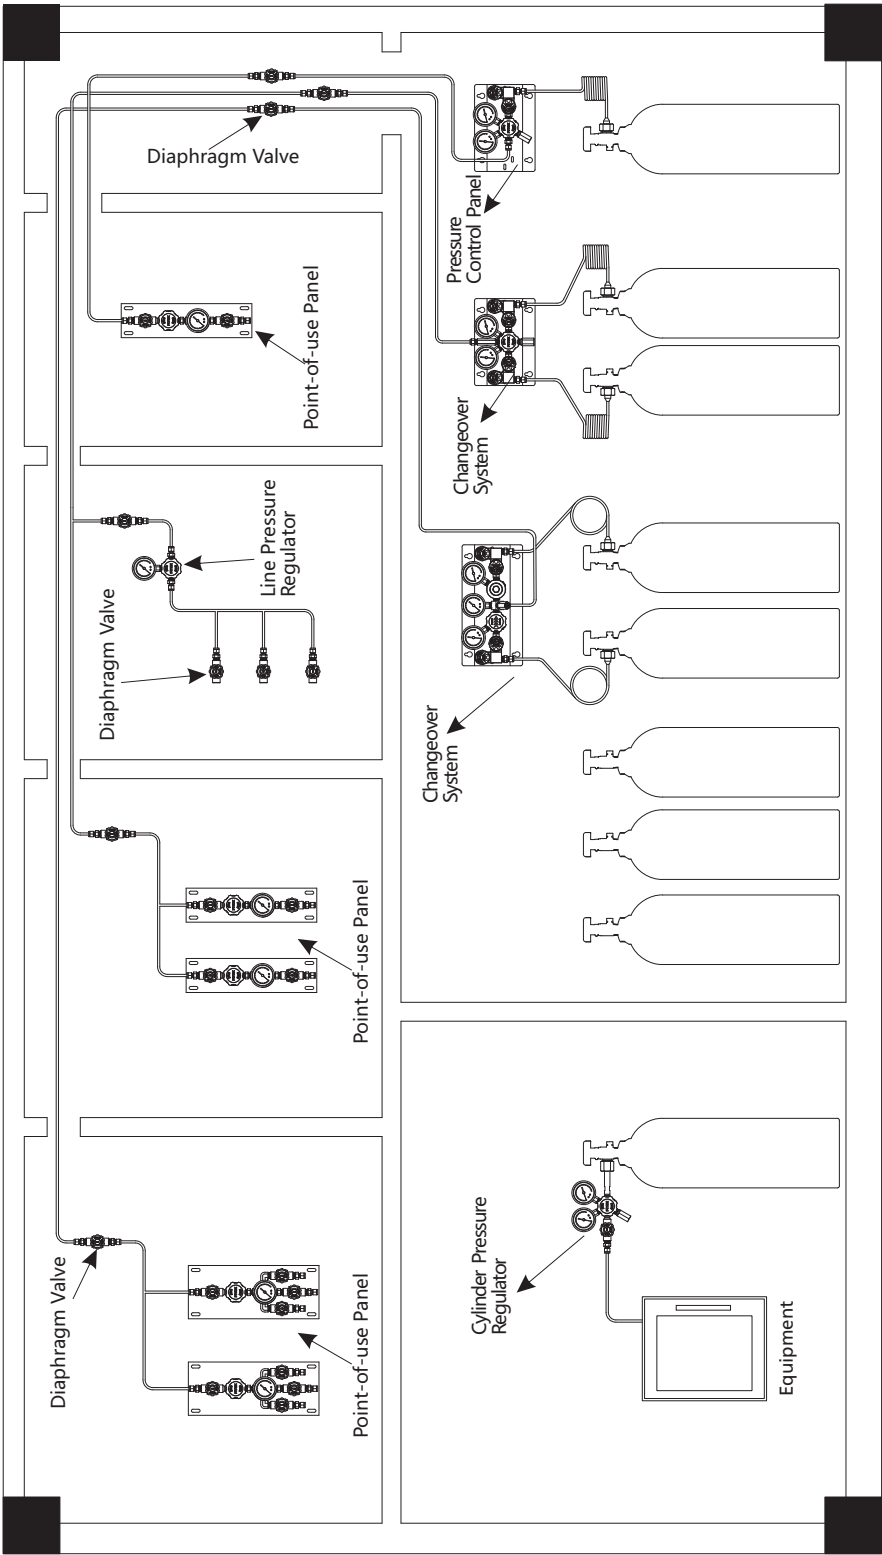

Selection Guide

Series																		
		FCR-1	FCR-1S	FCR-2	FCR-1D	FLR-1	FLR-2	FLR-3	FSR-1	FSR-2	FDR-1	FDR-2	FDR-1L	FDR-1T	FPR-1	FPR-1S	BPR-1	BPR-2
Material	Brass	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	SS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Hastelloy	✓			✓	✓									✓			
Pressure Reduction Design	Diaphragm	✓	✓		✓	✓		✓	✓		✓		✓	✓	✓	✓	✓	
	Piston			✓			✓			✓		✓						✓
	Preset												✓				✓	✓
	Adjustable	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Single-Stage	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		
	Dual-Stage				✓									✓				
	Regulator Type	Cylinder	✓	✓	✓	✓												
In-Line						✓	✓	✓										
Control Panel									✓	✓	✓	✓	✓	✓				
Point-of-use															✓	✓		
Back Pressure																	✓	✓
Maximum Inlet Pressure	6000 psig			✓														
	4500 psig	✓	✓	✓	✓		✓		✓	✓	✓	✓	✓	✓				
	3000 psig	✓	✓		✓		✓	✓	✓	✓	✓	✓	✓	✓				
	1500 psig					✓									✓	✓		
	500 psig					✓		✓										
Control Pressure Range	0~25 psig	✓	✓		✓	✓		✓	✓		✓		See page A-50	✓	✓	✓	✓	
	0~50 psig	✓	✓		✓	✓		✓	✓		✓			✓	✓	✓	✓	
	0~100 psig	✓	✓		✓	✓		✓	✓		✓			✓	✓	✓	✓	
	0~150 psig		✓		✓			✓						✓		✓		
	0~200 psig		✓					✓								✓		
	0~250 psig	✓			✓	✓	✓		✓		✓				✓		✓	
	0~300 psig																	✓
	0~500 psig	✓					✓		✓		✓				✓			✓
	0~750 psig			✓			✓			✓		✓						
	0~1000 psig						✓											✓
	0~1500 psig			✓						✓		✓						
	0~2500 psig			✓						✓		✓						
Page No.		A-08	A-11	A-14	A-17	A-20	A-23	A-26	A-38	A-41	A-44	A-47	A-50	A-54	A-58	A-61	A-64	A-68

Cylinder Pressure Regulators

FCR-1 Series General Diaphragm Regulators

Features

- ⦿ Metal-to-metal seal to minimize external leak
- ⦿ Convolutional diaphragm design to improve regulation precision and cycle life
- ⦿ Applicable to corrosive or toxic gases
- ⦿ With special cleaning and packaging, applicable to oxygen-enriched environments
- ⦿ Adjustable relief pressure
- ⦿ 20 μ m filter installed at inlet




Model: FCR-16L-30-100-C330-B-B-00-R-P

Technical Data


- ⦿ Single-stage regulator
- ⦿ Maximum inlet pressure: 3000 or 4500 psig
- ⦿ Outlet pressure range: 0~25, 0~50, 0~100, 0~250 or 0~500 psig
- ⦿ Material of the internal components:
 - Seat: PCTFE
 - Diaphragm: Hastelloy
 - Filter: 316L
- ⦿ Temperature: -40°F~+165°F (-40°C~+74°C)
- ⦿ Leak rates:
 - Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 - External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- ⦿ Flow coefficient (Cv): 0.06
- ⦿ Weight (regulator only): ≈ 1.98 lbs (0.9 kg)
- ⦿ Body ports: 1/4" female NPT for inlet, outlet, gauge and relief valve

Typical Flow Chart

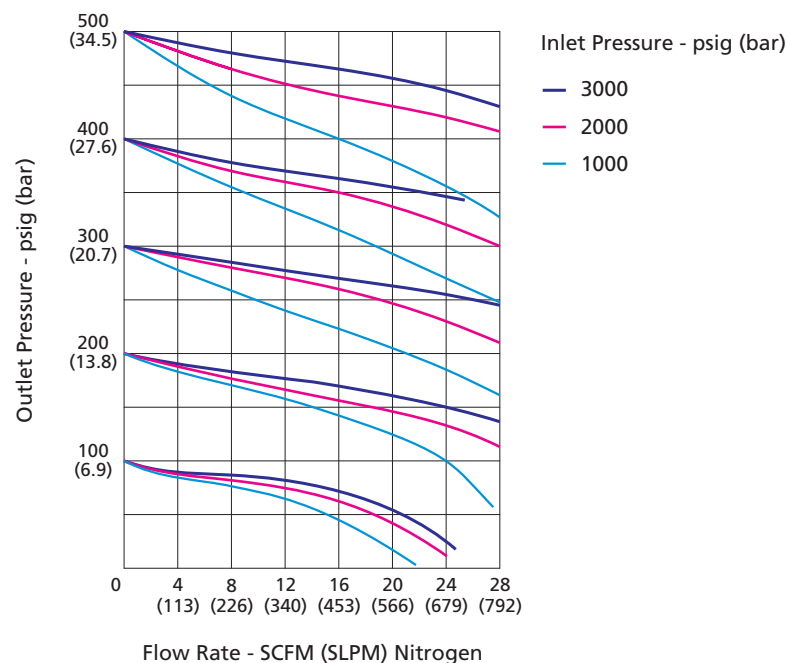


Dimensions

Dimensions, in inches (millimeters), are for reference only.

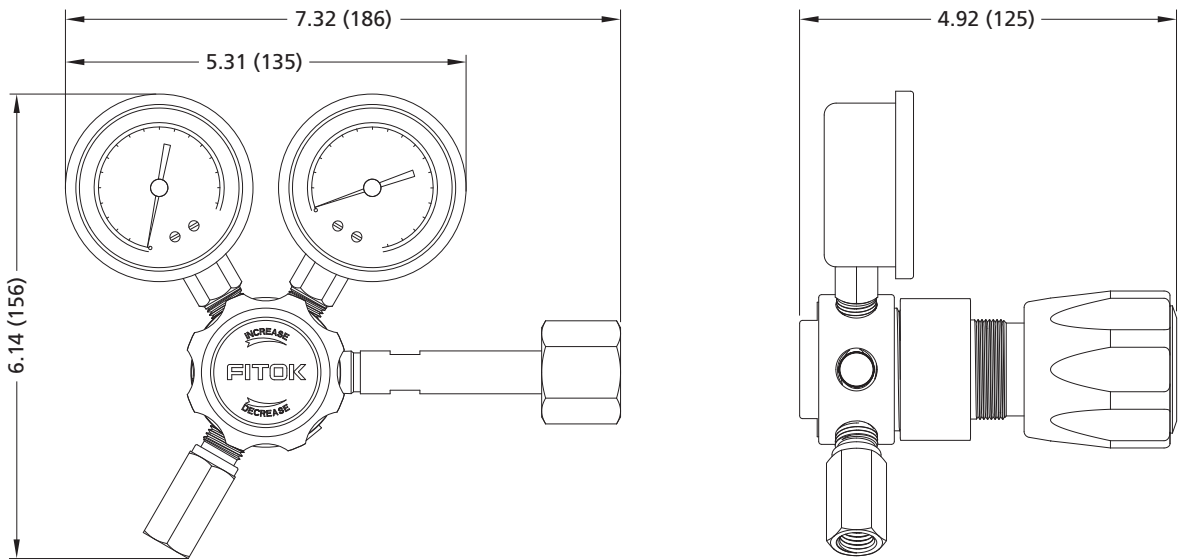

Porting Configurations

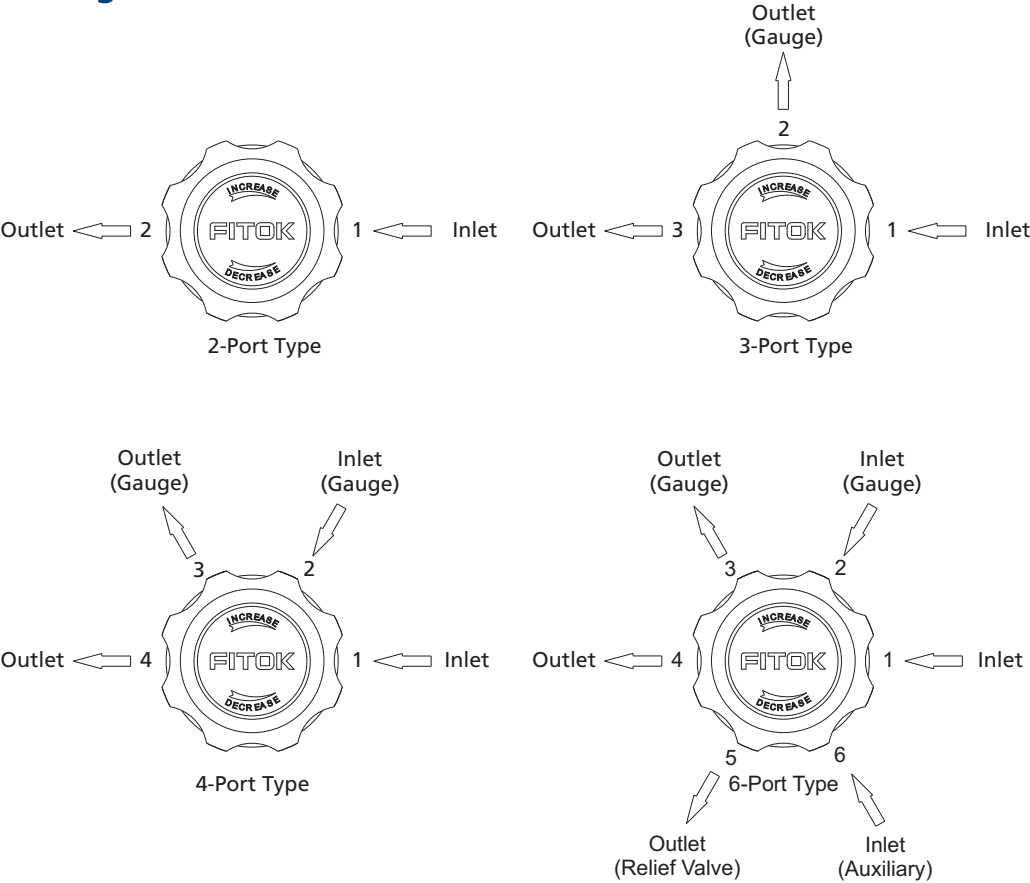

Part Number Description

Gas Control Equipment

Related Products

Technical References

FCR – 16L – 30 – 100 – C580 – M – M – 32 – R – P

Body Material

6L 316L SS

SS 316 SS

HC Hastelloy C-276

B Brass (Nickel-plated)

Inlet Pressure P1

30 3000 psig

45 4500 psig

Outlet Pressure Range P2

25 0~25 psig

50 0~50 psig

100 0~100 psig

250 0~250 psig

500 0~500 psig

Connection 1

00 1/4" Female NPT

C_ _ _ CGA Number (USA)

DIN_ DIN Number (Germany)

Refer to page B-28 for cylinder connections, according to the specific gas type. Cylinder connections compliant to other standards are available upon request. Please contact FITOK for details.

Connection 2

B With Gauge (psi/bar)

M With Gauge (MPa)

P Plug

Others refer to Connection 4

Connection 3

Same as Connection 2

Connection 4

00 1/4" Female NPT

01 1/4" Male NPT

10 1/4" Tube Fitting

11 3/8" Tube Fitting

20 6 mm Tube Fitting

21 8 mm Tube Fitting

30 Diaphragm Valve with 1/4" Female NPT

31 Diaphragm Valve with 1/4" Male NPT

32 Diaphragm Valve with 1/4" Tube Fitting

33 Diaphragm Valve with 3/8" Tube Fitting

34 Diaphragm Valve with 6 mm Tube Fitting

35 Diaphragm Valve with 8 mm Tube Fitting

Other connections are available upon request

Connection 5

R Relief Valve

P Plug

00 1/4" Female NPT

Connection 6

Same as Connection 5

Note: Most configurations are available.
Examples of part number:
a. 2-port type (1 in, 1 out): FCR-16L-45-100-C580-00
b. 3-port type (1 in, 2 out): FCR-1SS-30-500-C330-B-00
c. 4-port type (2 in, 2 out): FCR-1B-45-250-00-B-B-34

Cylinder Pressure Regulators

FCR-1S Series Sensitive Diaphragm Regulators

Features

- ⊙ Large diameter convoluted diaphragm to increase pressure sensitivity and minimize pressure drop
- ⊙ Fitted with captured vent as standard
- ⊙ 316L SS and Brass available for valve
- ⊙ With special cleaning and packaging, applicable to oxygen-enriched environments
- ⊙ Die spring for stable outlet pressure
- ⊙ 20 μ m filter installed at inlet




Model: FCR-1S6L-30-50-C580-B-B-00-R-P

Technical Data


- ⊙ Single-stage regulator
- ⊙ Maximum inlet pressure: 3000 or 4500 psig
- ⊙ Outlet pressure range: 0~25, 0~50, 0~100, 0~150 or 0~200 psig
- ⊙ Material of the internal components:
 - Seat: PCTFE
 - Diaphragm: 316L
 - Filter: 316L
- ⊙ Temperature: -40°F~+165°F (-40°C~+74°C)
- ⊙ Leak rates:
 - Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 - External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- ⊙ Flow coefficient (Cv): 0.06
- ⊙ Weight (regulator only): ≈ 2.87 lbs (1.3 kg)
- ⊙ Body ports: 1/4" female NPT for inlet, outlet, gauge and relief valve

Typical Flow Chart

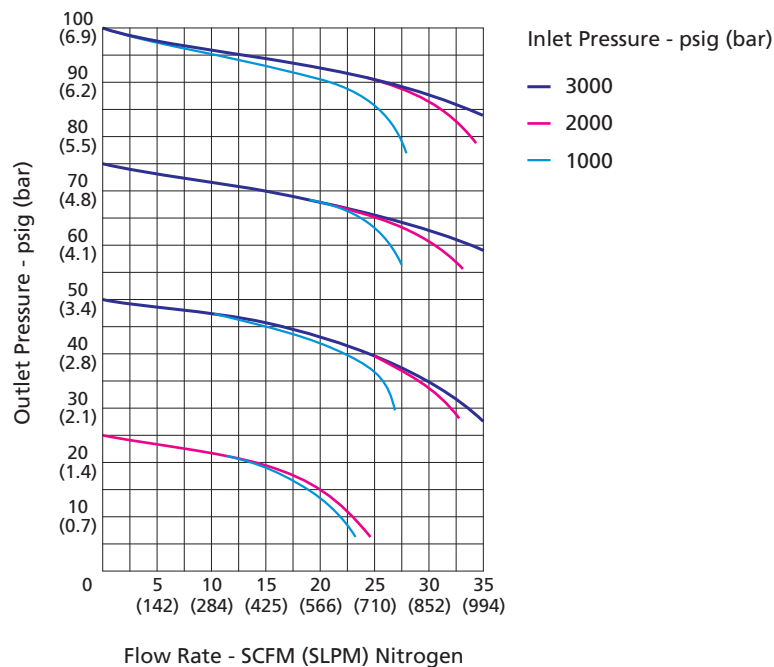


Dimensions

Dimensions, in inches (millimeters), are for reference only.

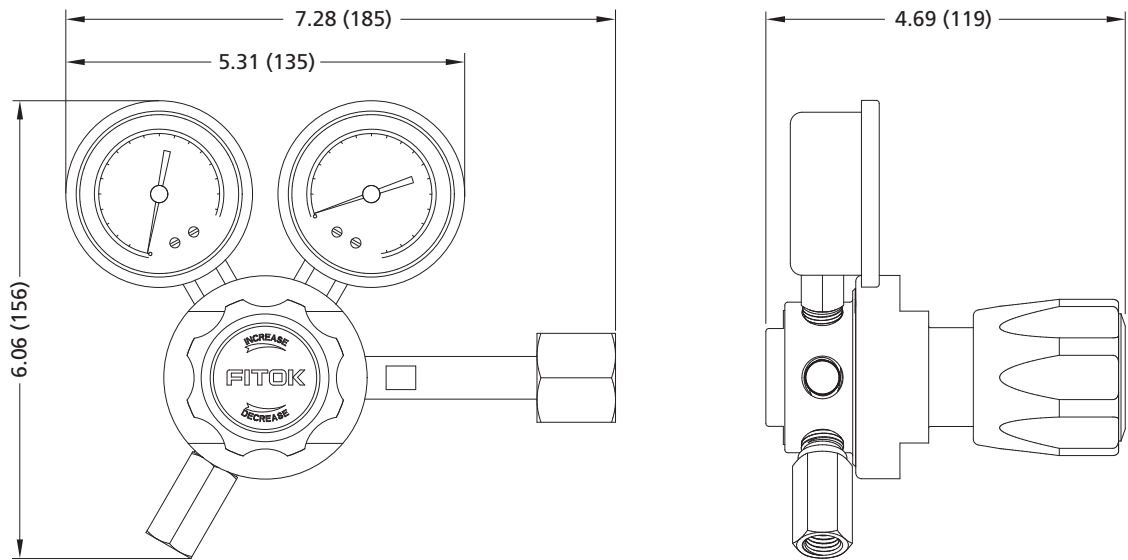

Porting Configurations

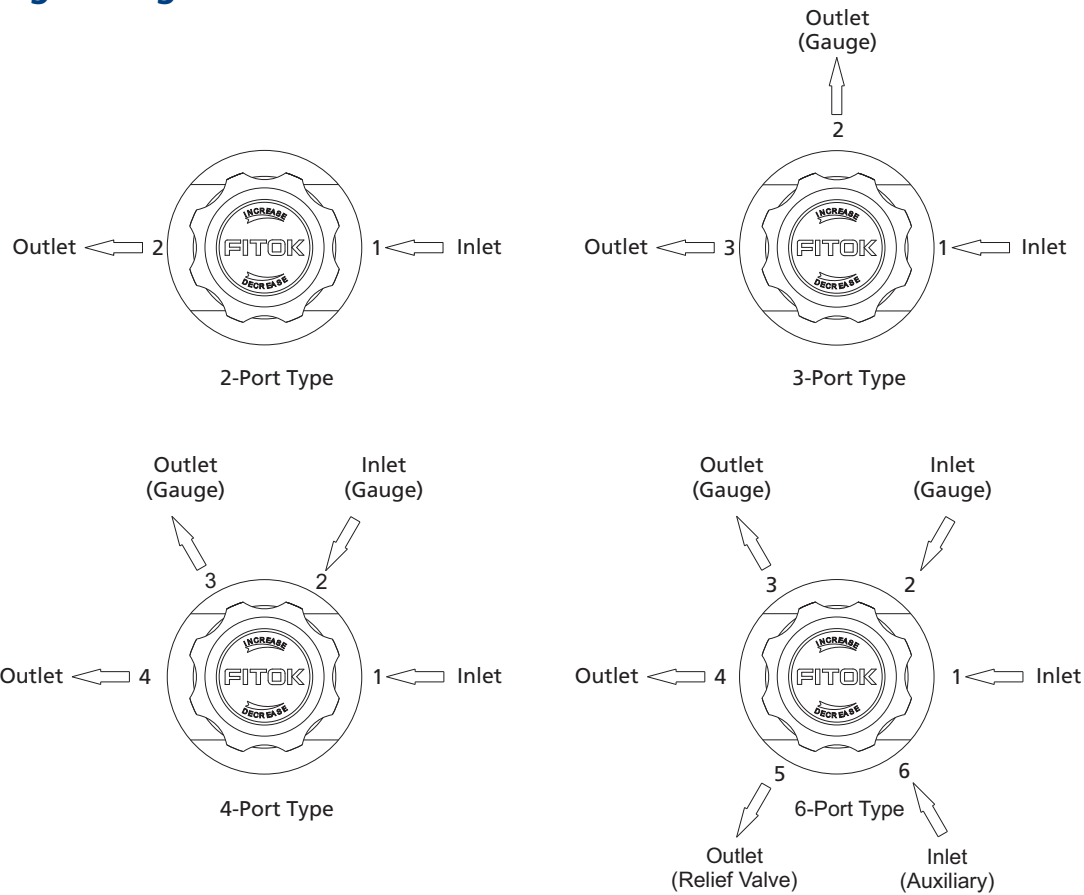

Part Number Description

FCR – 1S6L – 30 – 50 – DIN1 – M – M – 30 – R – P									
Body Material		Connection 1		Connection 2		Connection 4		Connection 5	
6L	316L SS	00	1/4" Female NPT	B	With Gauge (psi/bar)	00	1/4" Female NPT	R	Relief Valve
B	Brass	C_ _ _	CGA Number (USA)	M	With Gauge (MPa)	01	1/4" Male NPT	P	Plug
Inlet Pressure P1		DIN_	DIN Number (Germany)	P	Plug	10	1/4" Tube Fitting	00	1/4" Female NPT
		Refer to page B-28 for cylinder connections, according to the specific gas type. Cylinder connections compliant to other standards are available upon request. Please contact FITOK for details.				11	3/8" Tube Fitting	Connection 6	
30	3000 psig					20	6 mm Tube Fitting	Same as Connection 5	
45	4500 psig					21	8 mm Tube Fitting		
Outlet Pressure Range P2						30	Diaphragm Valve with 1/4" Female NPT		
						31	Diaphragm Valve with 1/4" Male NPT		
						32	Diaphragm Valve with 1/4" Tube Fitting		
						33	Diaphragm Valve with 3/8" Tube Fitting		
						34	Diaphragm Valve with 6 mm Tube Fitting		
25	0~25 psig					35	Diaphragm Valve with 8 mm Tube Fitting		
50	0~50 psig					Other connections are available upon request			
100	0~100 psig								
150	0~150 psig								
200	0~200 psig								
				Connection 3					
				Same as Connection 2					

Note: Most configurations are available.

Examples of part number:

- 2-port type (1 in, 1 out): FCR-1S6L-45-25-C580-00
- 3-port type (1 in, 2 out): FCR-1SB-30-150-C330-B-00
- 4-port type (2 in, 2 out): FCR-1SB-45-200-00-00-00-00

Cylinder Pressure Regulators

FCR-2 Series High Pressure Piston Regulators

Features


- ⦿ For high pressure applications
- ⦿ Robust piston-sensed design to ensure safety and reliability
- ⦿ 316L SS or Nickel-plated Brass body optional
- ⦿ For non-corrosive gases (due to seal limit)
- ⦿ With special cleaning and packaging, applicable to oxygen-enriched environments
- ⦿ Venting model available
- ⦿ 20 μ m filter installed at inlet



Model: FCR-26L-45-750-DIN8-B-B-00-P-P


Technical Data

- ⦿ Single-stage regulator
- ⦿ Maximum inlet pressure: 4500 or 6000 psig
- ⦿ Outlet pressure range: 0~750, 0~1500 or 0~2500 psig
- ⦿ Material of the internal components:
 - Main Seat: PCTFE (PEEK for Venting Model)
 - Vent Seat: PCTFE
 - Piston: 316L
 - O-ring: Viton or Kalrez
 - Filter: 316L
- ⦿ Temperature: -15°F~+165°F (-26°C~+74°C)
- ⦿ Leak rates:
 - Internal: Bubble-tight
 - External: Bubble-tight
- ⦿ Flow coefficient (Cv):
 - Without vent: 0.06
 - Vent: 0.1
- ⦿ Weight (regulator only): \approx 1.98 lbs (0.9 kg)
- ⦿ Body ports: 1/4" female NPT for inlet, outlet and gauge

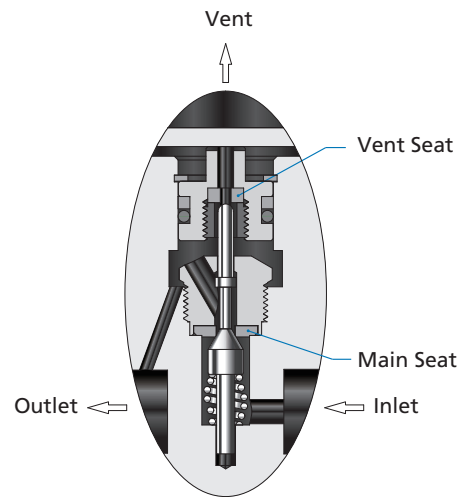


Construction Drawing with Venting Model

Typical Flow Chart

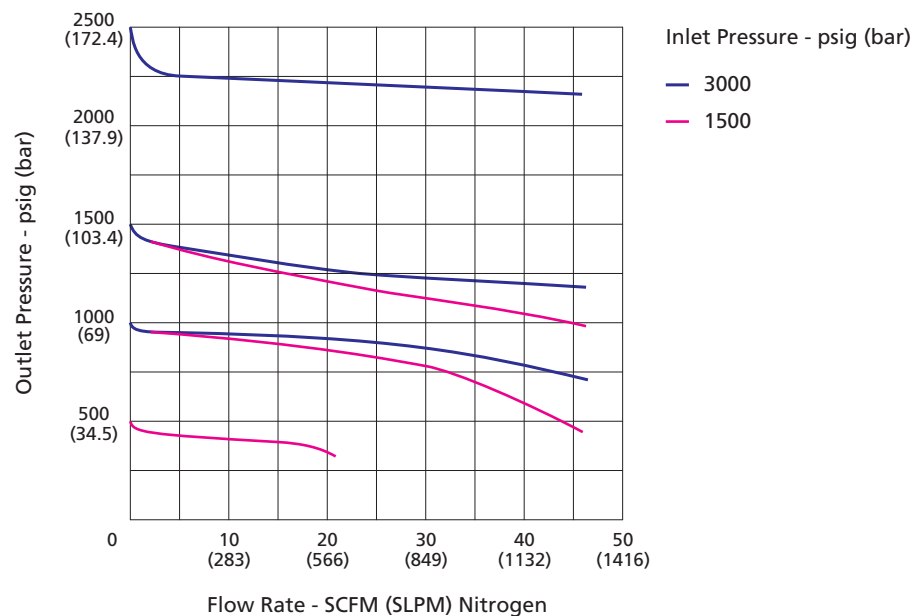


Dimensions

Dimensions, in inches (millimeters), are for reference only.

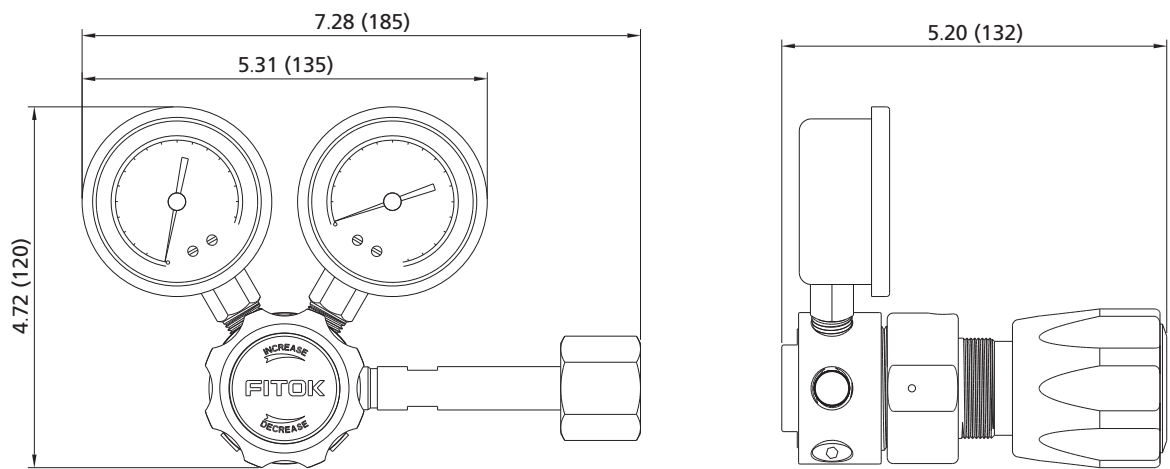

Porting Configurations

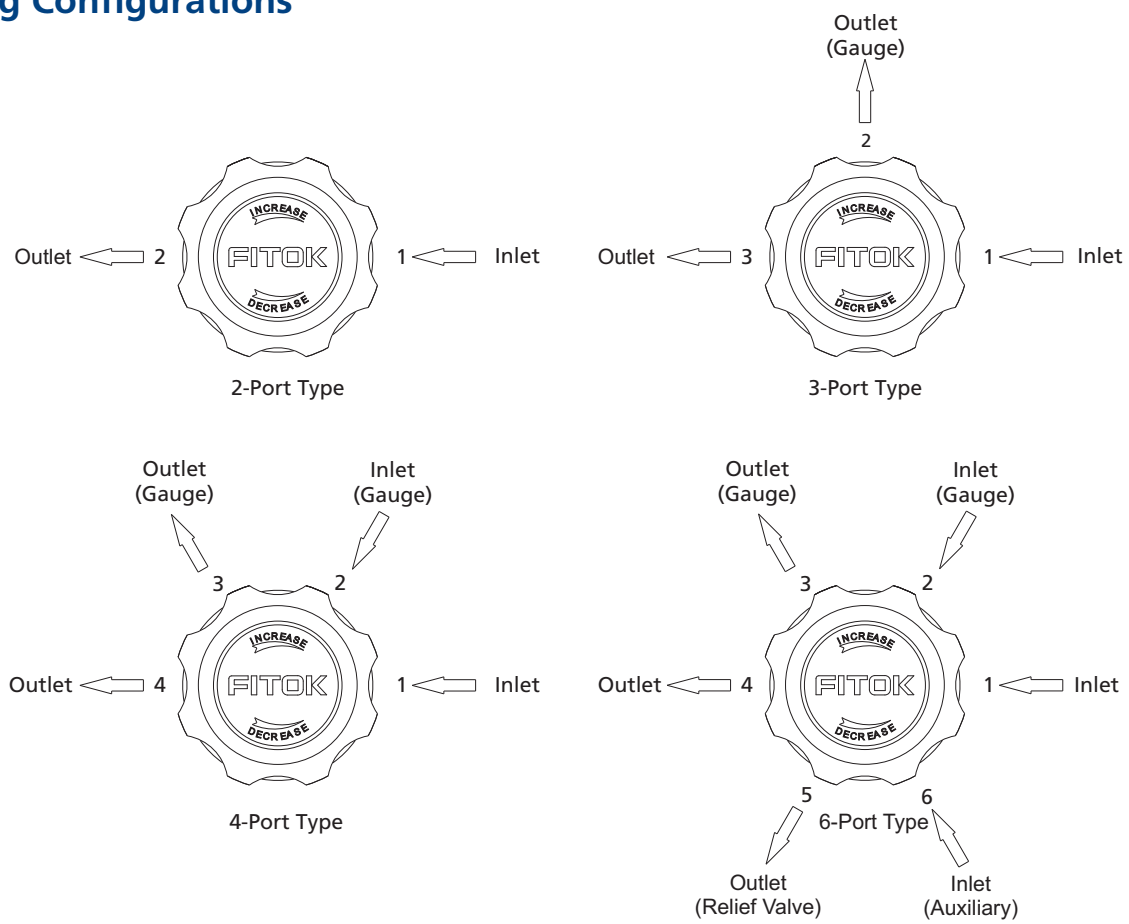

Part Number Description

FCR – 2V Z 6L – 45 – 750 – DIN6 – M – M – 00 – P – P																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Note: Most configurations are available.

Examples of part number:

a. 2-port type (1 in, 1 out): FCR-26L-45-1500-C580-00

b. 3-port type (1 in, 2 out): FCR-2VB-45-750-C660-00-00

c. 4-port type (2 in, 2 out): FCR-2VZSS-60-2500-00-B-B-32

Cylinder Pressure Regulators

FCR-1D Series Dual-stage Diaphragm Regulators

Features

- ⊙ Compact design
- ⊙ Dual-stage pressure reducing construction to provide accurate and stable pressure
- ⊙ 20 μ m filter installed at inlet
- ⊙ With special cleaning and packaging, applicable to oxygen-enriched environments




Model: FCR-1D6L-30-100-C660-B-B-00-R-P

Technical Data



- ⊙ Maximum inlet pressure: 3000 or 4500 psig
- ⊙ 1st stage outlet pressure range: 480~500 psig
2nd stage outlet pressure range: 0~25, 0~50, 0~100, 0~150, 0~250 psig
- ⊙ Material of the internal components:
Seat: PCTFE
Diaphragm: Hastelloy
Filter: 316L
- ⊙ Temperature: -40°F~+165°F (-40°C~+74°C)
- ⊙ Leak rates:
Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- ⊙ Flow coefficient (Cv): 0.05
- ⊙ Weight (regulator only): ≈ 3.3 lbs (1.5 kg)
- ⊙ Body ports: 1/4" female NPT for inlet, outlet, gauge and relief valve

Typical Flow Chart


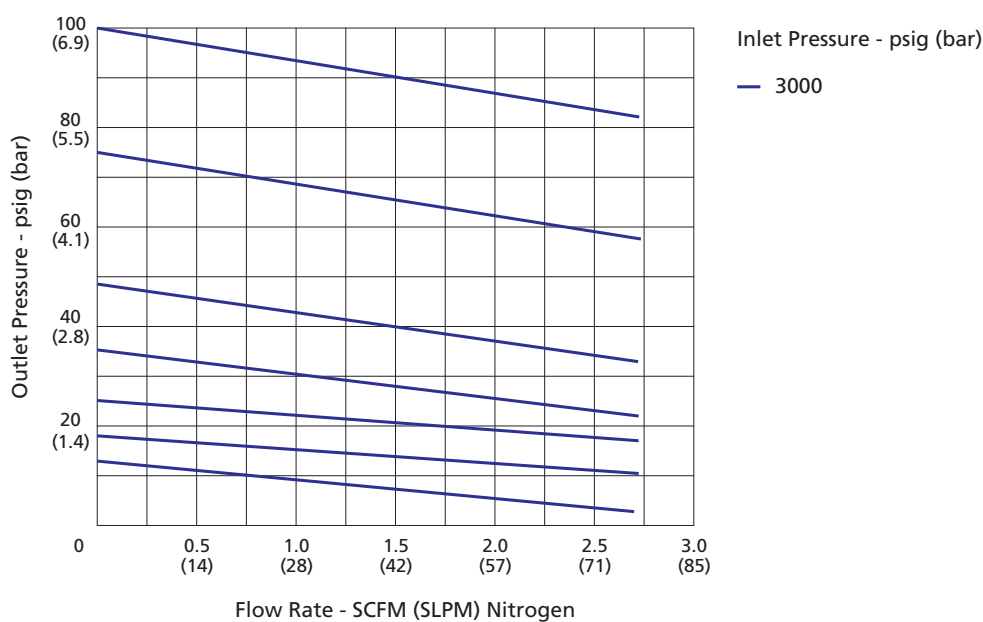


Dimensions

Dimensions, in inches (millimeters), are for reference only.

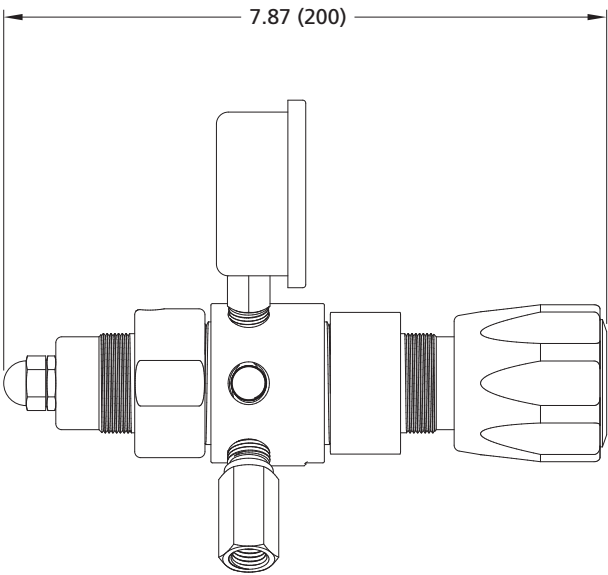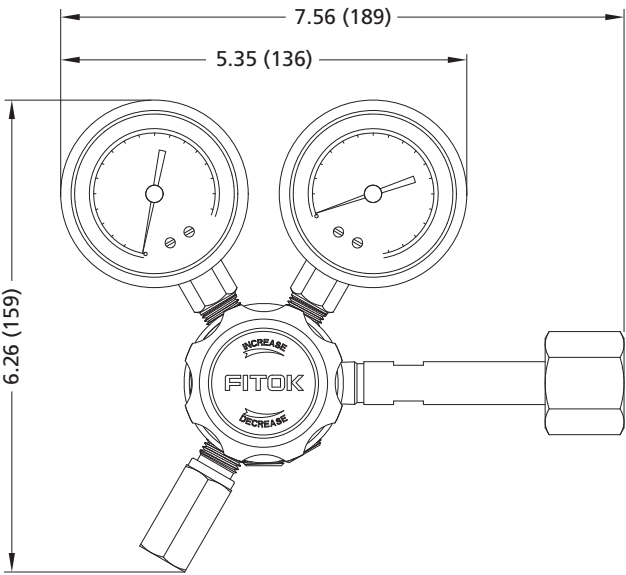

Porting Configurations

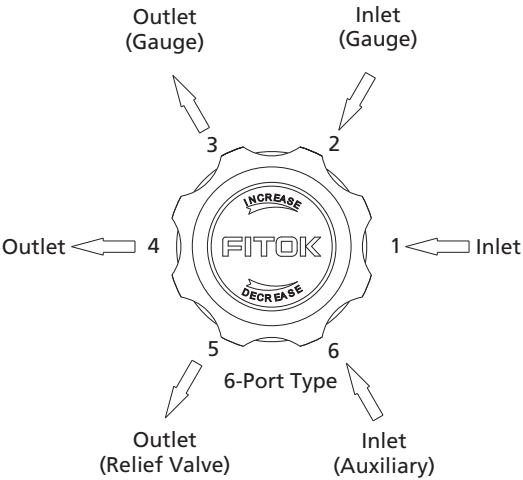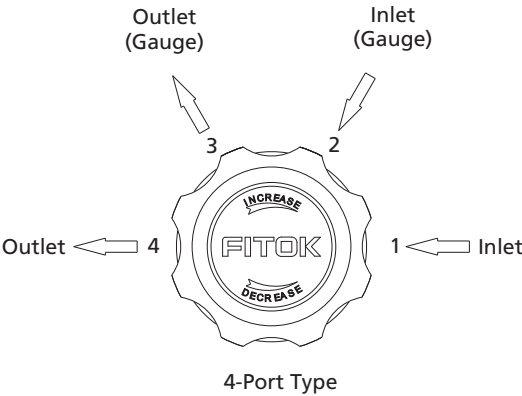

Part Number Description

FCR – 1D6L – 30 – 100 – C350 – B – B – 30 – R – P																																							
<table><tr><th>Body Material</th></tr><tr><td>6L 316L SS</td></tr><tr><td>SS 316 SS</td></tr><tr><td>HC Hastelloy C-276</td></tr><tr><td>B Brass (Nickel-plated)</td></tr></table>	Body Material	6L 316L SS	SS 316 SS	HC Hastelloy C-276	B Brass (Nickel-plated)	<table><tr><th>Connection 1</th></tr><tr><td>00 1/4" Female NPT</td></tr><tr><td>C___ CGA Number (USA)</td></tr><tr><td>DIN_ DIN Number (Germany)</td></tr><tr><td>Refer to page B-28 for cylinder connections, according to the specific gas type. Cylinder connections compliant to other standards are available upon request. Please contact FITOK for details.</td></tr></table>	Connection 1	00 1/4" Female NPT	C___ CGA Number (USA)	DIN_ DIN Number (Germany)	Refer to page B-28 for cylinder connections, according to the specific gas type. Cylinder connections compliant to other standards are available upon request. Please contact FITOK for details.	<table><tr><th>Connection 2</th></tr><tr><td>B With Gauge (psi/bar)</td></tr><tr><td>M With Gauge (MPa)</td></tr><tr><td>P Plug</td></tr><tr><td>00 1/4" Female NPT</td></tr></table>	Connection 2	B With Gauge (psi/bar)	M With Gauge (MPa)	P Plug	00 1/4" Female NPT	<table><tr><th>Connection 4</th></tr><tr><td>00 1/4" Female NPT</td></tr><tr><td>01 1/4" Male NPT</td></tr><tr><td>10 1/4" Tube Fitting</td></tr><tr><td>11 3/8" Tube Fitting</td></tr><tr><td>20 6 mm Tube Fitting</td></tr><tr><td>21 8 mm Tube Fitting</td></tr><tr><td>30 Diaphragm Valve with 1/4" Female NPT</td></tr><tr><td>31 Diaphragm Valve with 1/4" Male NPT</td></tr><tr><td>32 Diaphragm Valve with 1/4" Tube Fitting</td></tr><tr><td>33 Diaphragm Valve with 3/8" Tube Fitting</td></tr><tr><td>34 Diaphragm Valve with 6 mm Tube Fitting</td></tr><tr><td>35 Diaphragm Valve with 8 mm Tube Fitting</td></tr><tr><td>Other connections are available upon request</td></tr></table>	Connection 4	00 1/4" Female NPT	01 1/4" Male NPT	10 1/4" Tube Fitting	11 3/8" Tube Fitting	20 6 mm Tube Fitting	21 8 mm Tube Fitting	30 Diaphragm Valve with 1/4" Female NPT	31 Diaphragm Valve with 1/4" Male NPT	32 Diaphragm Valve with 1/4" Tube Fitting	33 Diaphragm Valve with 3/8" Tube Fitting	34 Diaphragm Valve with 6 mm Tube Fitting	35 Diaphragm Valve with 8 mm Tube Fitting	Other connections are available upon request	<table><tr><th>Connection 5</th></tr><tr><td>R Relief Valve</td></tr><tr><td>P Plug</td></tr><tr><td>00 1/4" Female NPT</td></tr></table> <table><tr><th>Connection 6</th></tr><tr><td>Same as Connection 5</td></tr></table>	Connection 5	R Relief Valve	P Plug	00 1/4" Female NPT	Connection 6	Same as Connection 5
Body Material																																							
6L 316L SS																																							
SS 316 SS																																							
HC Hastelloy C-276																																							
B Brass (Nickel-plated)																																							
Connection 1																																							
00 1/4" Female NPT																																							
C___ CGA Number (USA)																																							
DIN_ DIN Number (Germany)																																							
Refer to page B-28 for cylinder connections, according to the specific gas type. Cylinder connections compliant to other standards are available upon request. Please contact FITOK for details.																																							
Connection 2																																							
B With Gauge (psi/bar)																																							
M With Gauge (MPa)																																							
P Plug																																							
00 1/4" Female NPT																																							
Connection 4																																							
00 1/4" Female NPT																																							
01 1/4" Male NPT																																							
10 1/4" Tube Fitting																																							
11 3/8" Tube Fitting																																							
20 6 mm Tube Fitting																																							
21 8 mm Tube Fitting																																							
30 Diaphragm Valve with 1/4" Female NPT																																							
31 Diaphragm Valve with 1/4" Male NPT																																							
32 Diaphragm Valve with 1/4" Tube Fitting																																							
33 Diaphragm Valve with 3/8" Tube Fitting																																							
34 Diaphragm Valve with 6 mm Tube Fitting																																							
35 Diaphragm Valve with 8 mm Tube Fitting																																							
Other connections are available upon request																																							
Connection 5																																							
R Relief Valve																																							
P Plug																																							
00 1/4" Female NPT																																							
Connection 6																																							
Same as Connection 5																																							
<table><tr><th>Inlet Pressure P1</th></tr><tr><td>30 3000 psig</td></tr><tr><td>45 4500 psig</td></tr></table>	Inlet Pressure P1	30 3000 psig	45 4500 psig																																				
Inlet Pressure P1																																							
30 3000 psig																																							
45 4500 psig																																							
<table><tr><th>Outlet Pressure Range P2</th></tr><tr><td>25 0~25 psig</td></tr><tr><td>50 0~50 psig</td></tr><tr><td>100 0~100 psig</td></tr><tr><td>150 0~150 psig</td></tr><tr><td>250 0~250 psig</td></tr></table>	Outlet Pressure Range P2	25 0~25 psig	50 0~50 psig	100 0~100 psig	150 0~150 psig	250 0~250 psig																																	
Outlet Pressure Range P2																																							
25 0~25 psig																																							
50 0~50 psig																																							
100 0~100 psig																																							
150 0~150 psig																																							
250 0~250 psig																																							

Note: Most configurations are available.

Examples of part number:

a. 4-port type (2 in, 2 out): FCR-1DB-45-150-DIN1-B-B-30

b. 6-port type (3 in, 3 out): FCR-1DSS-30-50-C580-B-B-00-R-P

Line Pressure Regulators

FLR-1 Series Compact Diaphragm Regulators

Features

- Similar to FCR-1 Series Regulators with larger orifice to provide higher flow capacity
- Three porting configurations available
- 316L SS body for corrosive or toxic gases, Nickel-plated Brass body for non-corrosive gases
- With special cleaning and packaging, applicable to oxygen-enriched environments
- Configuration with filter installed at inlet as standard
- Panel mounted or installed with screw at the bottom


Technical Data

- Single-stage regulator
- Maximum inlet pressure: 500 or 1500 psig
- Outlet pressure range: 0~25, 0~50, 0~100 or 0~250 psig
- Material of the internal components:
 - Seat: PCTFE
 - Diaphragm: Hastelloy
 - Filter: 316L
- Temperature: -40°F~+165°F (-40°C~+74°C)
- Leak rates:
 - Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 - External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- Flow coefficient (Cv): 0.14
- Weight (regulator only): ≈ 1.98 lbs (0.9 kg)
- Body ports: 1/4" female NPT for inlet, outlet and gauge






Model: FLR-16L-15-100-00-00-Z

Typical Flow Chart

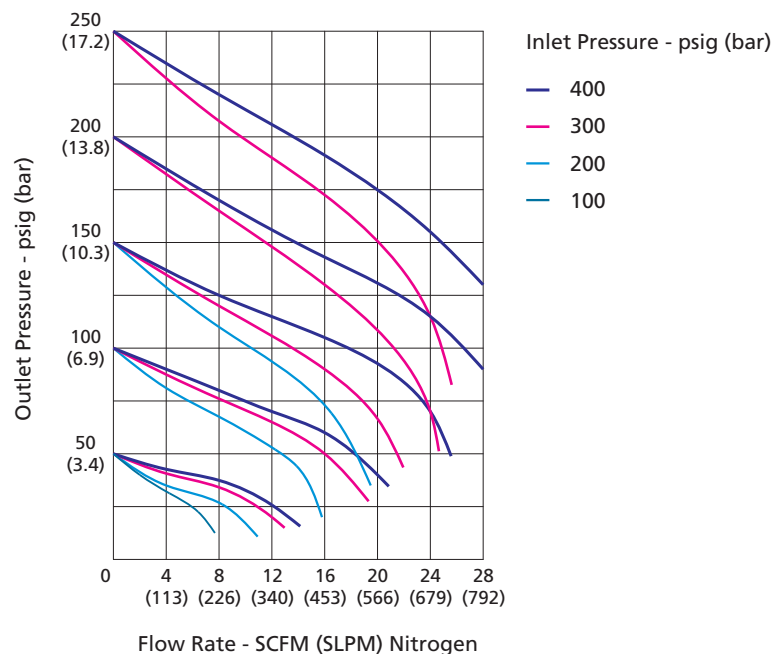


Dimensions

Dimensions, in inches (millimeters), are for reference only.

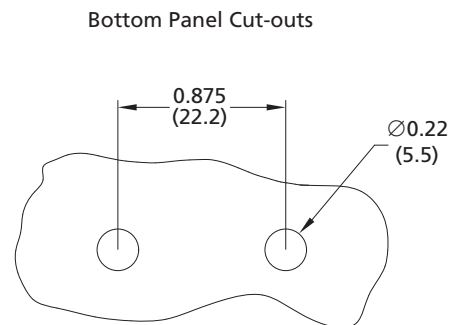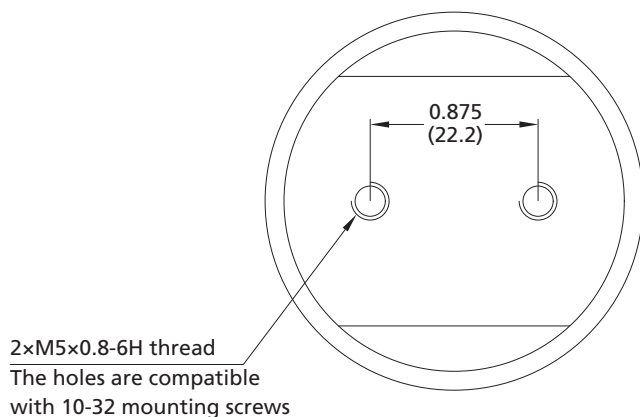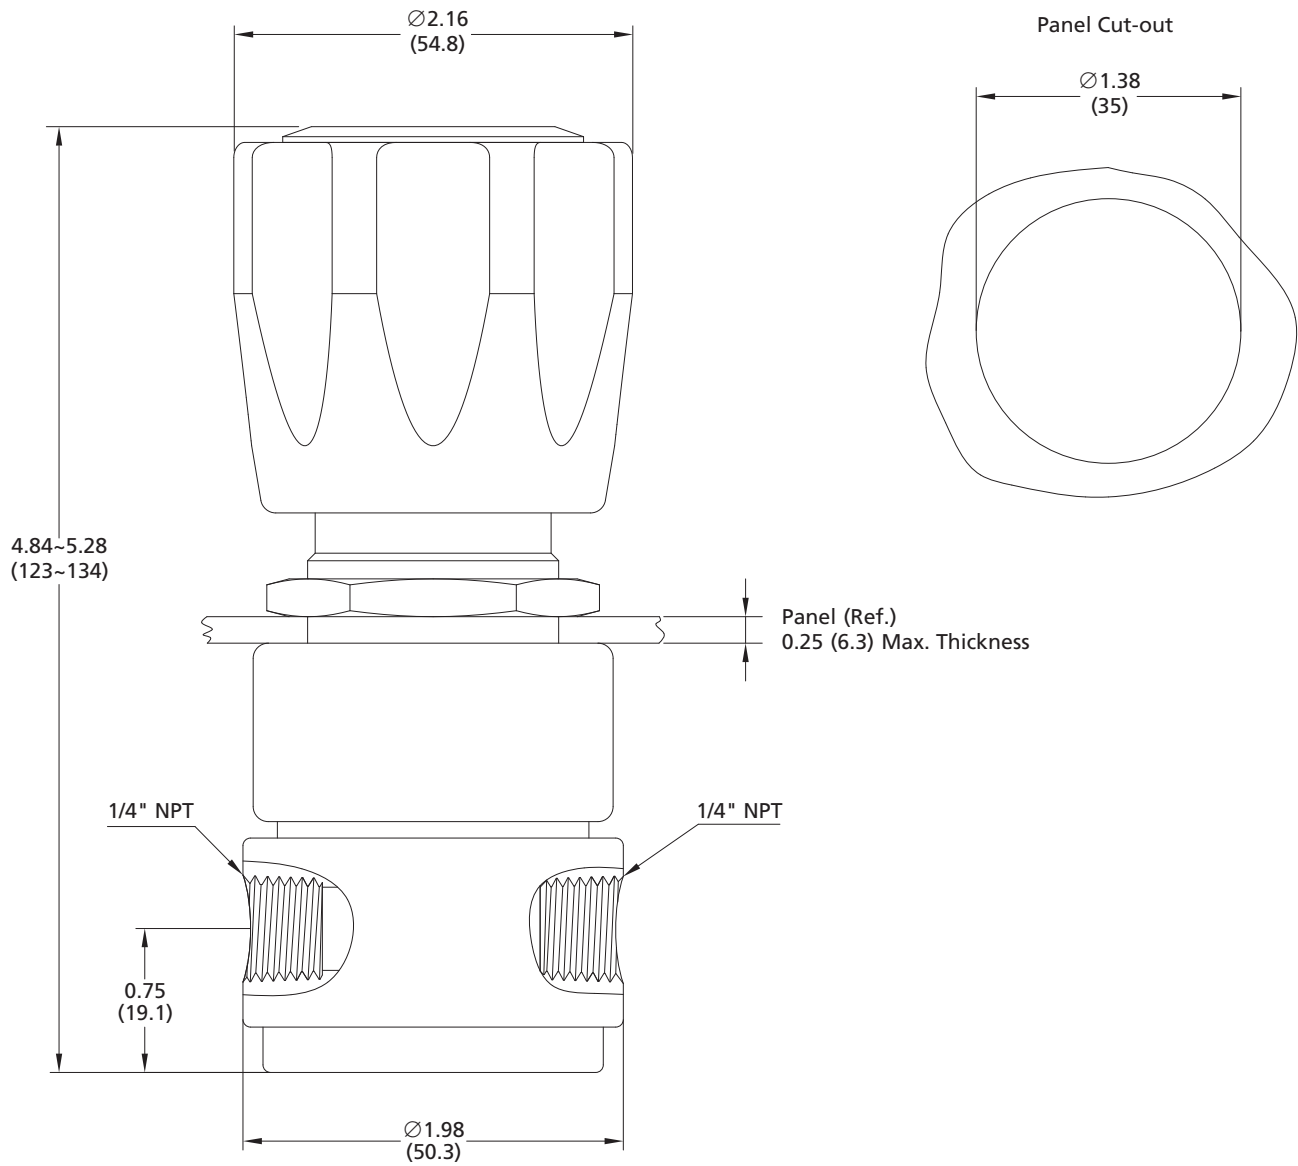

Porting Configurations

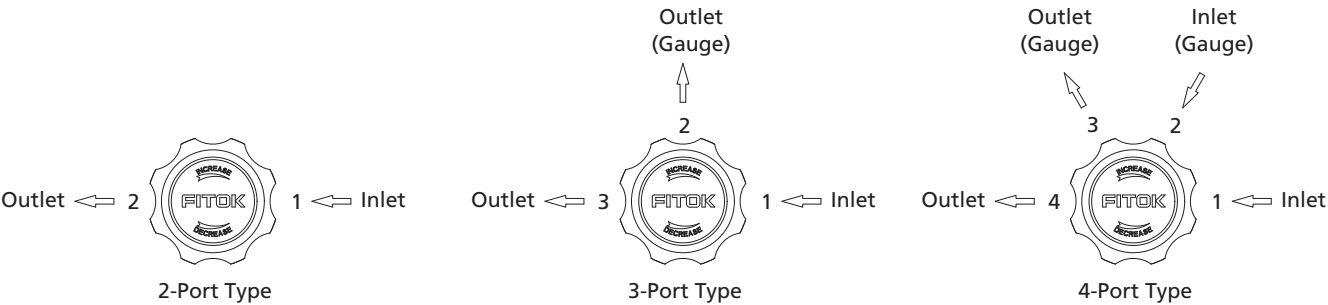

Part Number Description

FLR - 16L		-	15	-	100	-	00	-	B	-	B	-	00	-	Z	
Body Material		Inlet Pressure P1		Connection 1		Connection 2		Connection 3		Connection 4		Installation Type				
6L	316L SS	05	500 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	Same as Connection 2		Same as Connection 1		Not Required				
SS	316 SS	15	1500 psig	01	1/4" Male NPT	M	With Gauge (MPa)					Z Installed with One Panel Nut				
HC	Hastelloy C-276	Outlet Pressure Range P2		10	1/4" Tube Fitting	P	Plug					N Installed with Screws at the Bottom				
B	Brass (Nickel-plated)			11	3/8" Tube Fitting	00	1/4" Female NPT									
				20	6 mm Tube Fitting	01	1/4" Male NPT									
				21	8 mm Tube Fitting	10	1/4" Tube Fitting									
		25	0~25 psig	Other connections are available upon request		11	3/8" Tube Fitting									
		50	0~50 psig			20	6 mm Tube Fitting									
		100	0~100 psig			21	8 mm Tube Fitting									
		250	0~250 psig			Other connections are available upon request										

Note: Most configurations are available.

Examples of part number:

a. 2-port type (1 in, 1 out): FLR-16L-15-25-00-00

b. 3-port type (1 in, 2 out): FLR-16L-05-100-00-B-00

Line Pressure Regulators

FLR-2 Series Piston Regulators

Features

- ⦿ Applicable to non-corrosive gases or low-viscosity liquids
- ⦿ Easy to assemble and disassemble, convenient replacement of springs with different output ranges
- ⦿ Robust piston-sensed design to provide safety and reliability
- ⦿ With special cleaning and packaging, applicable to oxygen-enriched environments
- ⦿ Three porting configurations available
- ⦿ Panel mounted or installed with screws at the bottom


Technical Data

- ⦿ Single-stage regulator
- ⦿ Maximum inlet pressure: 3000 or 4500 psig
- ⦿ Outlet pressure range: 0~250, 0~500, 0~750 or 0~1000 psig
- ⦿ Material of the internal components:
Main Seat: PCTFE (PEEK for Venting Model)
Vent Seat: PCTFE
Piston: 316L
O-ring: Viton or Kalrez
Filter: 316L
- ⦿ Temperature: -15°F~+165°F (-26°C~+74°C)
- ⦿ Leak rates:
Internal: Bubble-tight
External: Bubble-tight
- ⦿ Flow coefficient (Cv):
Without vent: 0.06
Vent: 0.1
- ⦿ Weight (regulator only): ≈1.98 lbs (0.9 kg)
- ⦿ Body ports: 1/4" female NPT for inlet, outlet and gauge




Model: FLR-2SS-45-1000-00-00-Z

Typical Flow Chart

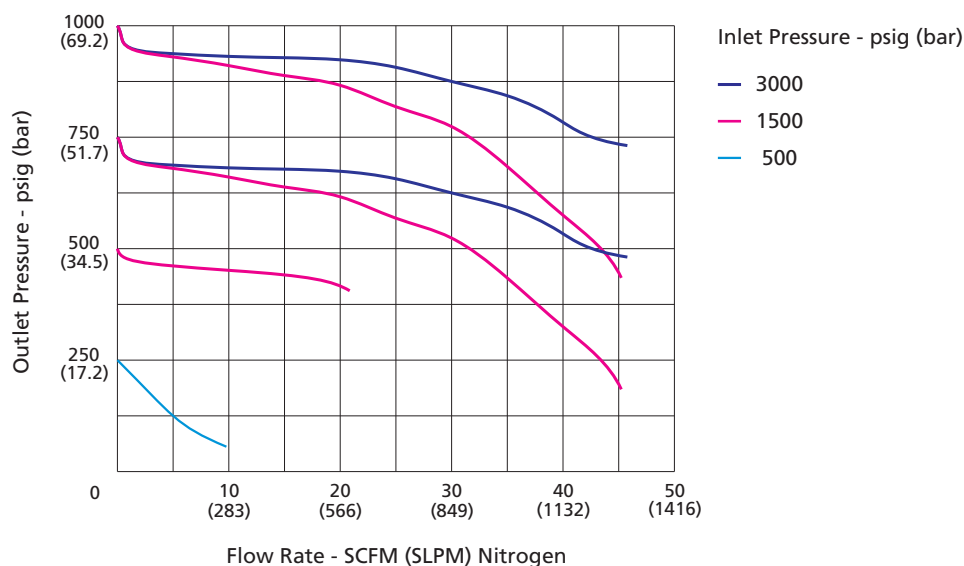


Dimensions

Dimensions, in inches (millimeters), are for reference only.

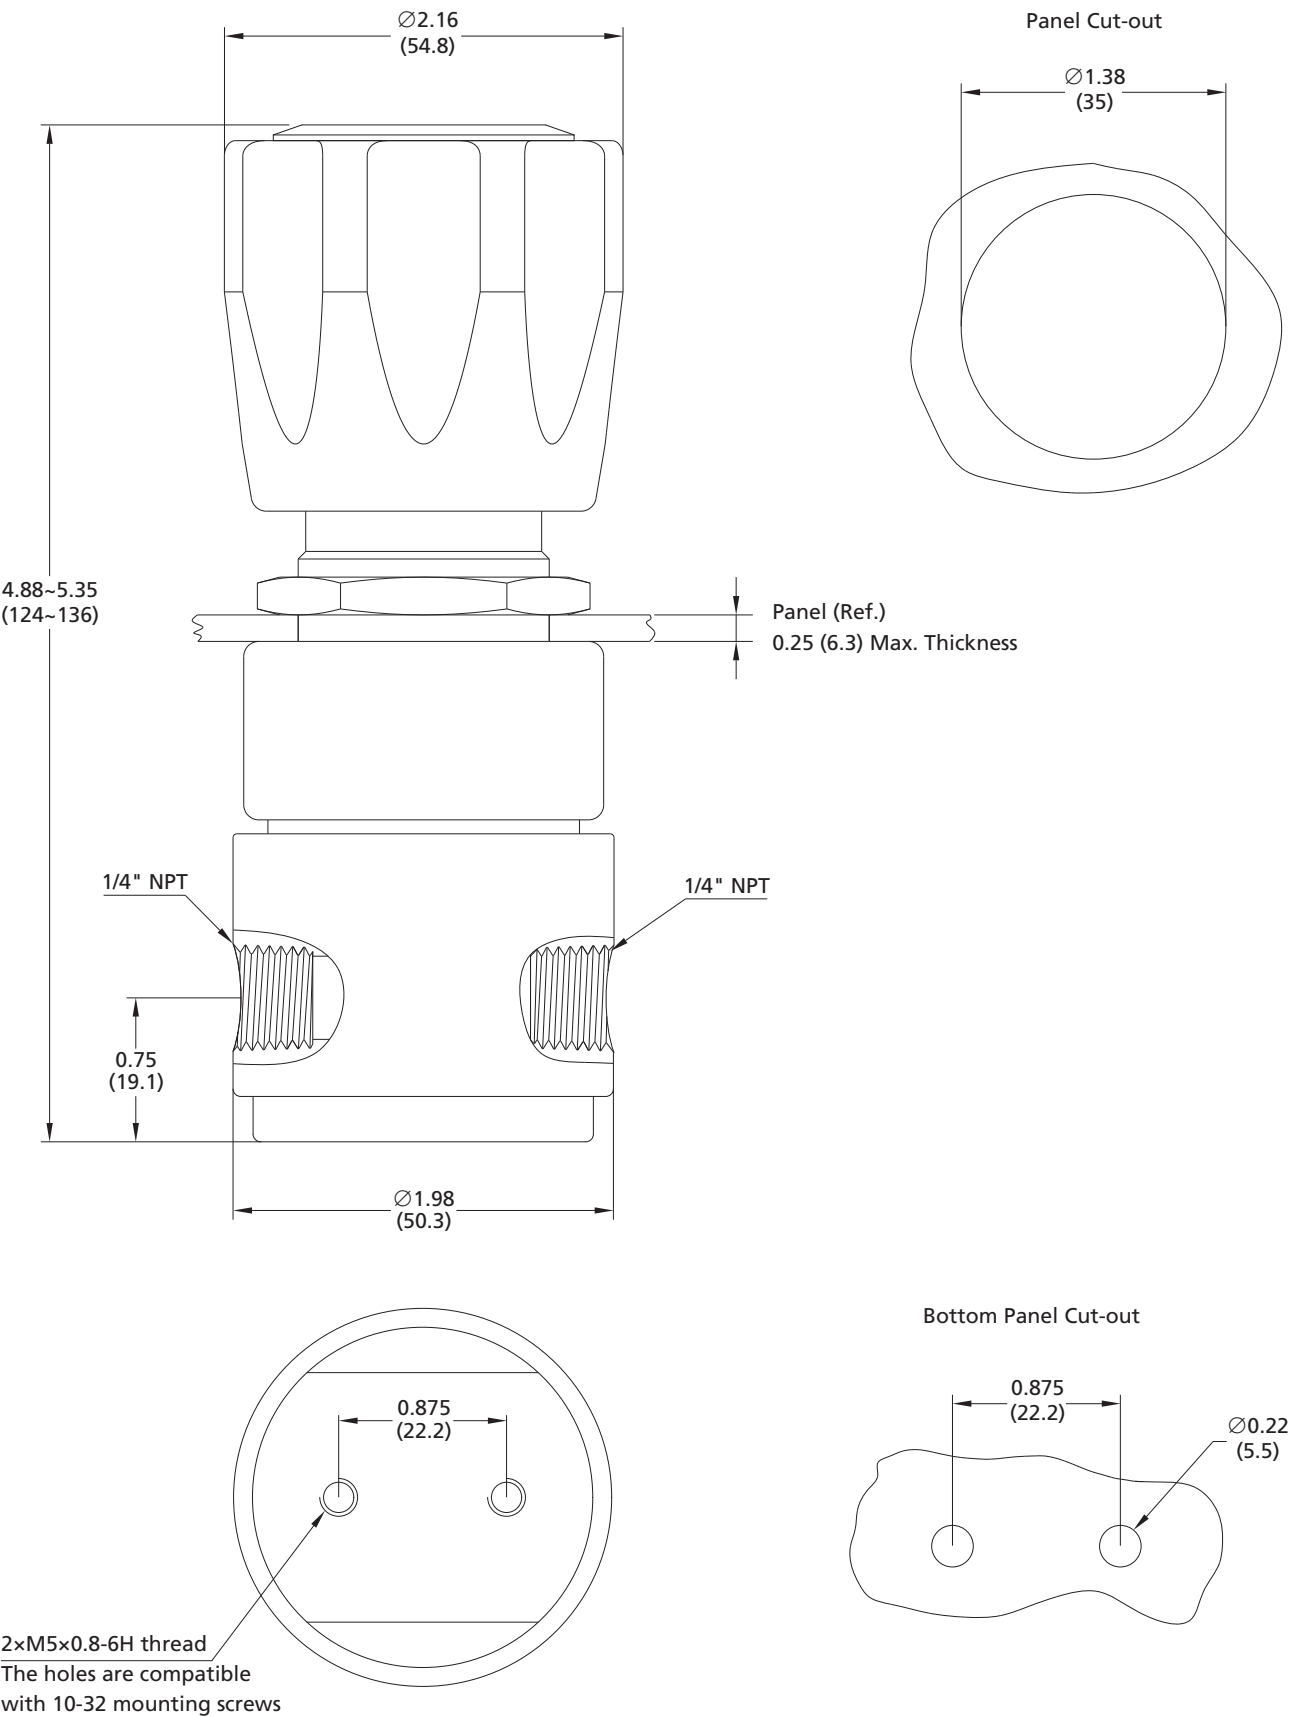

Porting Configurations

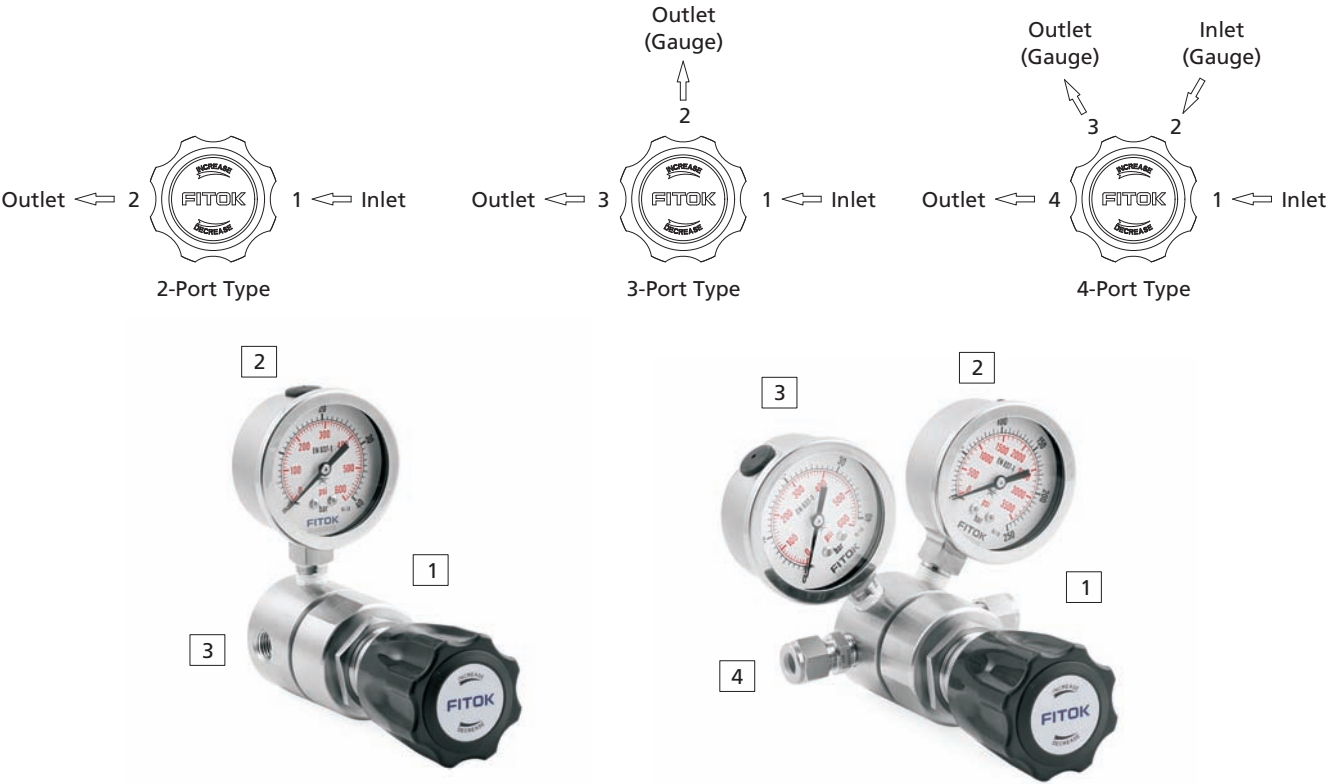

Part Number Description

FLR - 2V		Z	6L	- 45	- 500	- 10	-	B	-	B	-	10	-	Z
Vent Option		Inlet Pressure P1		Connection 1		Connection 2		Connection 3		Connection 4		Installation Type		
	Without	30	3000 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	Same as Connection 2		Same as Connection 1				
V	With	45	4500 psig	01	1/4" Male NPT	M	With Gauge (MPa)							
O-ring Material		Outlet Pressure Range P2		10	1/4" Tube Fitting	P	Plug							
	Viton	250	0~250 psig	11	3/8" Tube Fitting	00	1/4" Female NPT					Z Installed with One Panel Nut		
Z	Kalrez	500	0~500 psig	20	6 mm Tube Fitting	01	1/4" Male NPT					N Installed with Screws at the Bottom		
Body Material		750	0~750 psig	21	8 mm Tube Fitting	10	1/4" Tube Fitting							
6L	316L SS	1000	0~1000 psig	Other connections are available upon request		11	3/8" Tube Fitting							
SS	316 SS					20	6 mm Tube Fitting							
B	Brass (Nickel-plated)					21	8 mm Tube Fitting							
						Other connections are available upon request								

Note: Most configurations are available.
Examples of part number:
a. 2-port type (1 in, 1 out): FLR-26L-30-250-00-00
b. 3-port type (1 in, 2 out): ,FLR-2SS-45-1000-00-00-00

Line Pressure Regulators

FLR-3 Series Medium Flow Diaphragm Regulators

Features

- ⦿ For high inlet pressure applications
- ⦿ Balanced poppet
- ⦿ With large orifice to minimize outlet pressure change when inlet pressure reduces
- ⦿ Large diameter convoluted diaphragm to increase pressure sensitivity
- ⦿ 316L SS body for corrosive or toxic gases, Brass body for non-corrosive gases
- ⦿ With special cleaning and packaging, applicable to oxygen-enriched environments
- ⦿ Three porting configurations available
- ⦿ Panel mounted or installed with screws at the bottom
- ⦿ Fitted with captured vent as standard


Technical Data

- ⦿ Single-stage regulator
- ⦿ Maximum inlet pressure: 500 or 3000 psig
- ⦿ Outlet pressure range: 0~25, 0~50, 0~100, 0~150 or 0~200 psig
- ⦿ Material of the internal components:
 - Seat: PCTFE
 - Diaphragm: Hastelloy
- ⦿ Temperature: -40°F~+140°F (-40°C~+60°C)
- ⦿ Leak rates:
 - Internal: Bubble-tight
 - External: $\leq 1 \times 10^{-9}$ mbar-l/s helium
- ⦿ Flow coefficient (Cv): 1.0
- ⦿ Weight (regulator only): ≈ 3.53 lbs (1.6 kg)
- ⦿ Body ports: 1/2" female NPT for inlet, outlet
1/4" female NPT for gauge




Model: FLR-3SS-30-100-04-04-Z

Typical Flow Chart

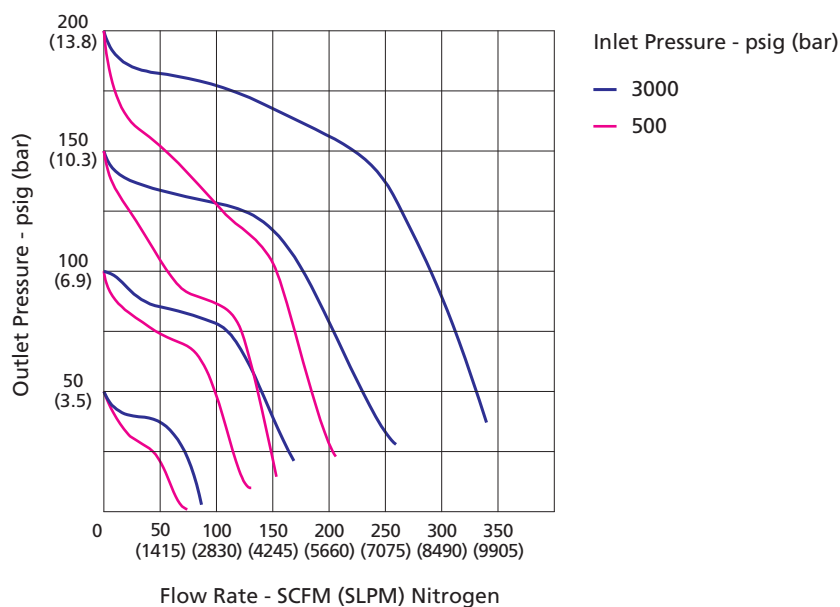

Dimensions

Dimensions, in inches (millimeters), are for reference only.

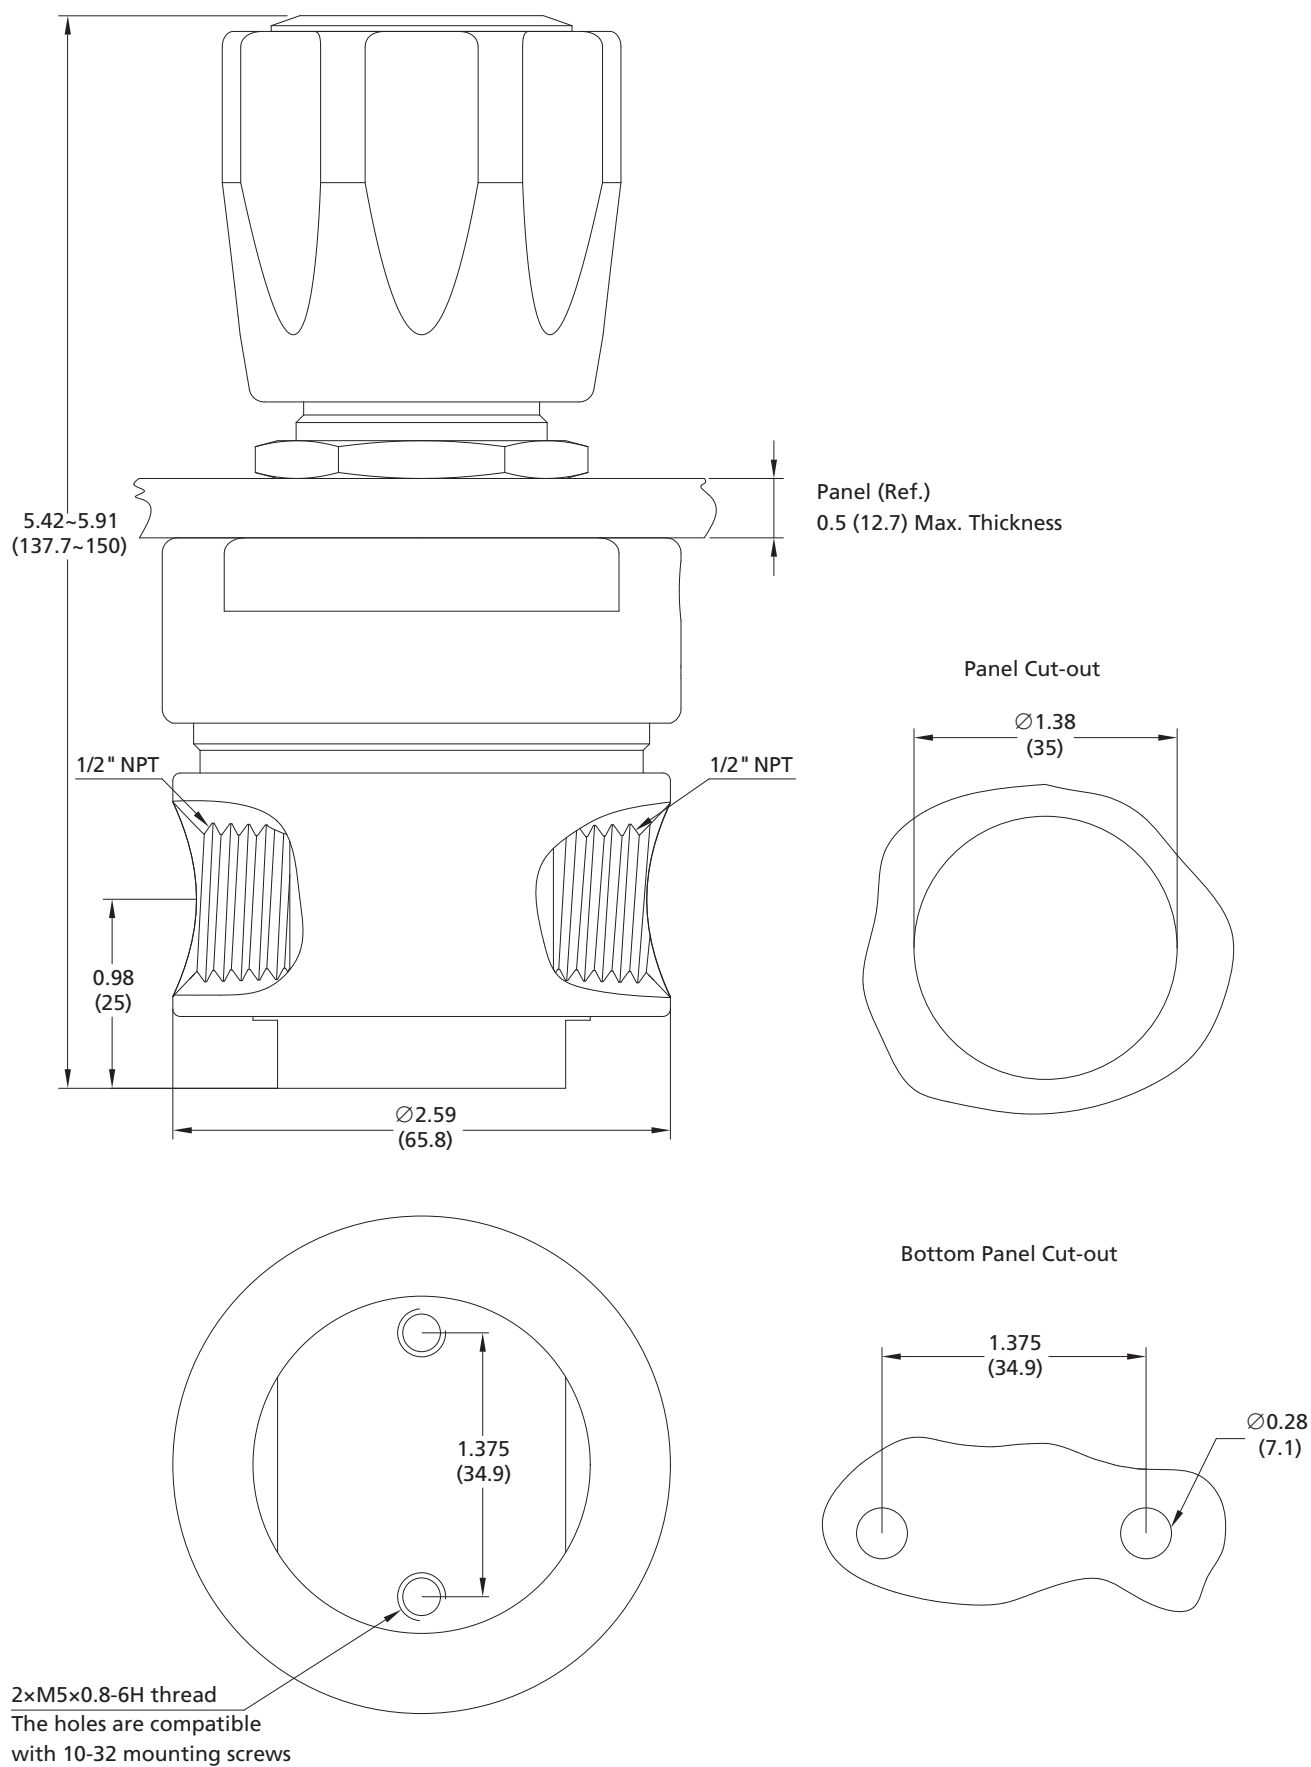



FLR - 3B - 30 - 100 - 04 - B - B - 04 - Z

Note: Most configurations are available.
Examples of part number:
 a. 2-port type (1 in, 1 out): FLR-36L-30-150-04-04
 b. 3-port type (1 in, 2 out): FLR-35S-05-200-04-00-04

Line Pressure Regulators

FLR-5 Series High Flow Diaphragm Regulators

Features

- Suitable for low pressure and high flow applications
- Large diameter convoluted diaphragm to increase pressure sensitivity
- 316L SS body for corrosive gases, and Brass body for non-corrosive gases
- Fitted with captured vent as standard
- With special cleaning and packaging, applicable to oxygen-enriched environments
- Panel mounted or installed with screws at the bottom


Technical Data

- Single-stage regulator
- Maximum inlet pressure: 500 psig
- Outlet pressure ranges: 0~15, 0~30, 0~75, 0~150 psig
- Material of the internal components:
Seat: PCTFE
Diaphragm: Hastelloy
- Temperature: -40°F~+165°F (-40°C~+74°C)
- Leak rates:
Internal: Bubble-tight
External: $\leq 1 \times 10^{-9}$ mbar.l/s helium
- Flow coefficient (Cv): 1.8
- Weight (regulator only): ≈ 5.95 lbs (2.7 Kg)
- Body ports: 3/4" female NPT for inlet, outlet,
1/4" female NPT for gauge




Model: FLR-56L-05-100-04-04-Z

Typical Flow Chart

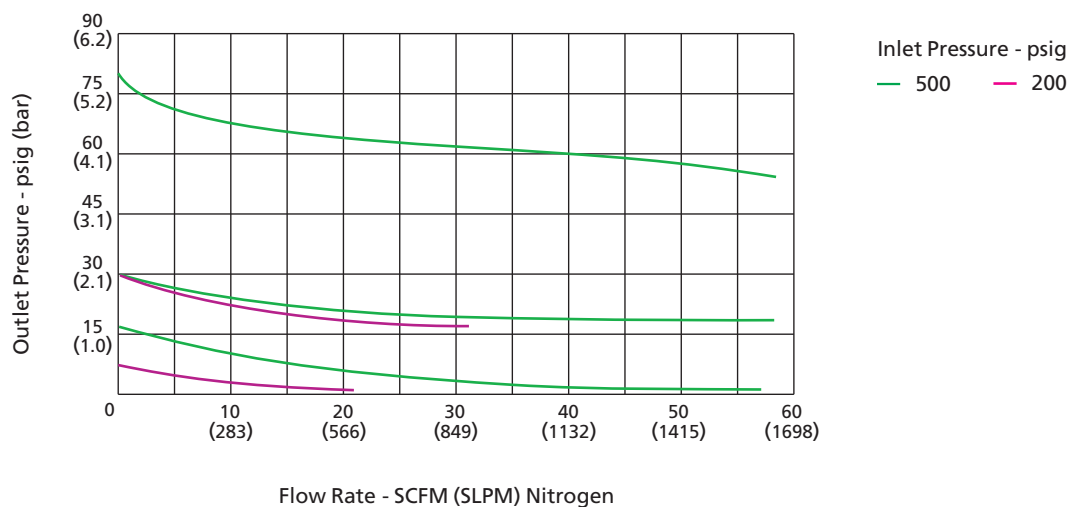


Dimensions

Dimensions, in inches (millimeters), are for reference only.

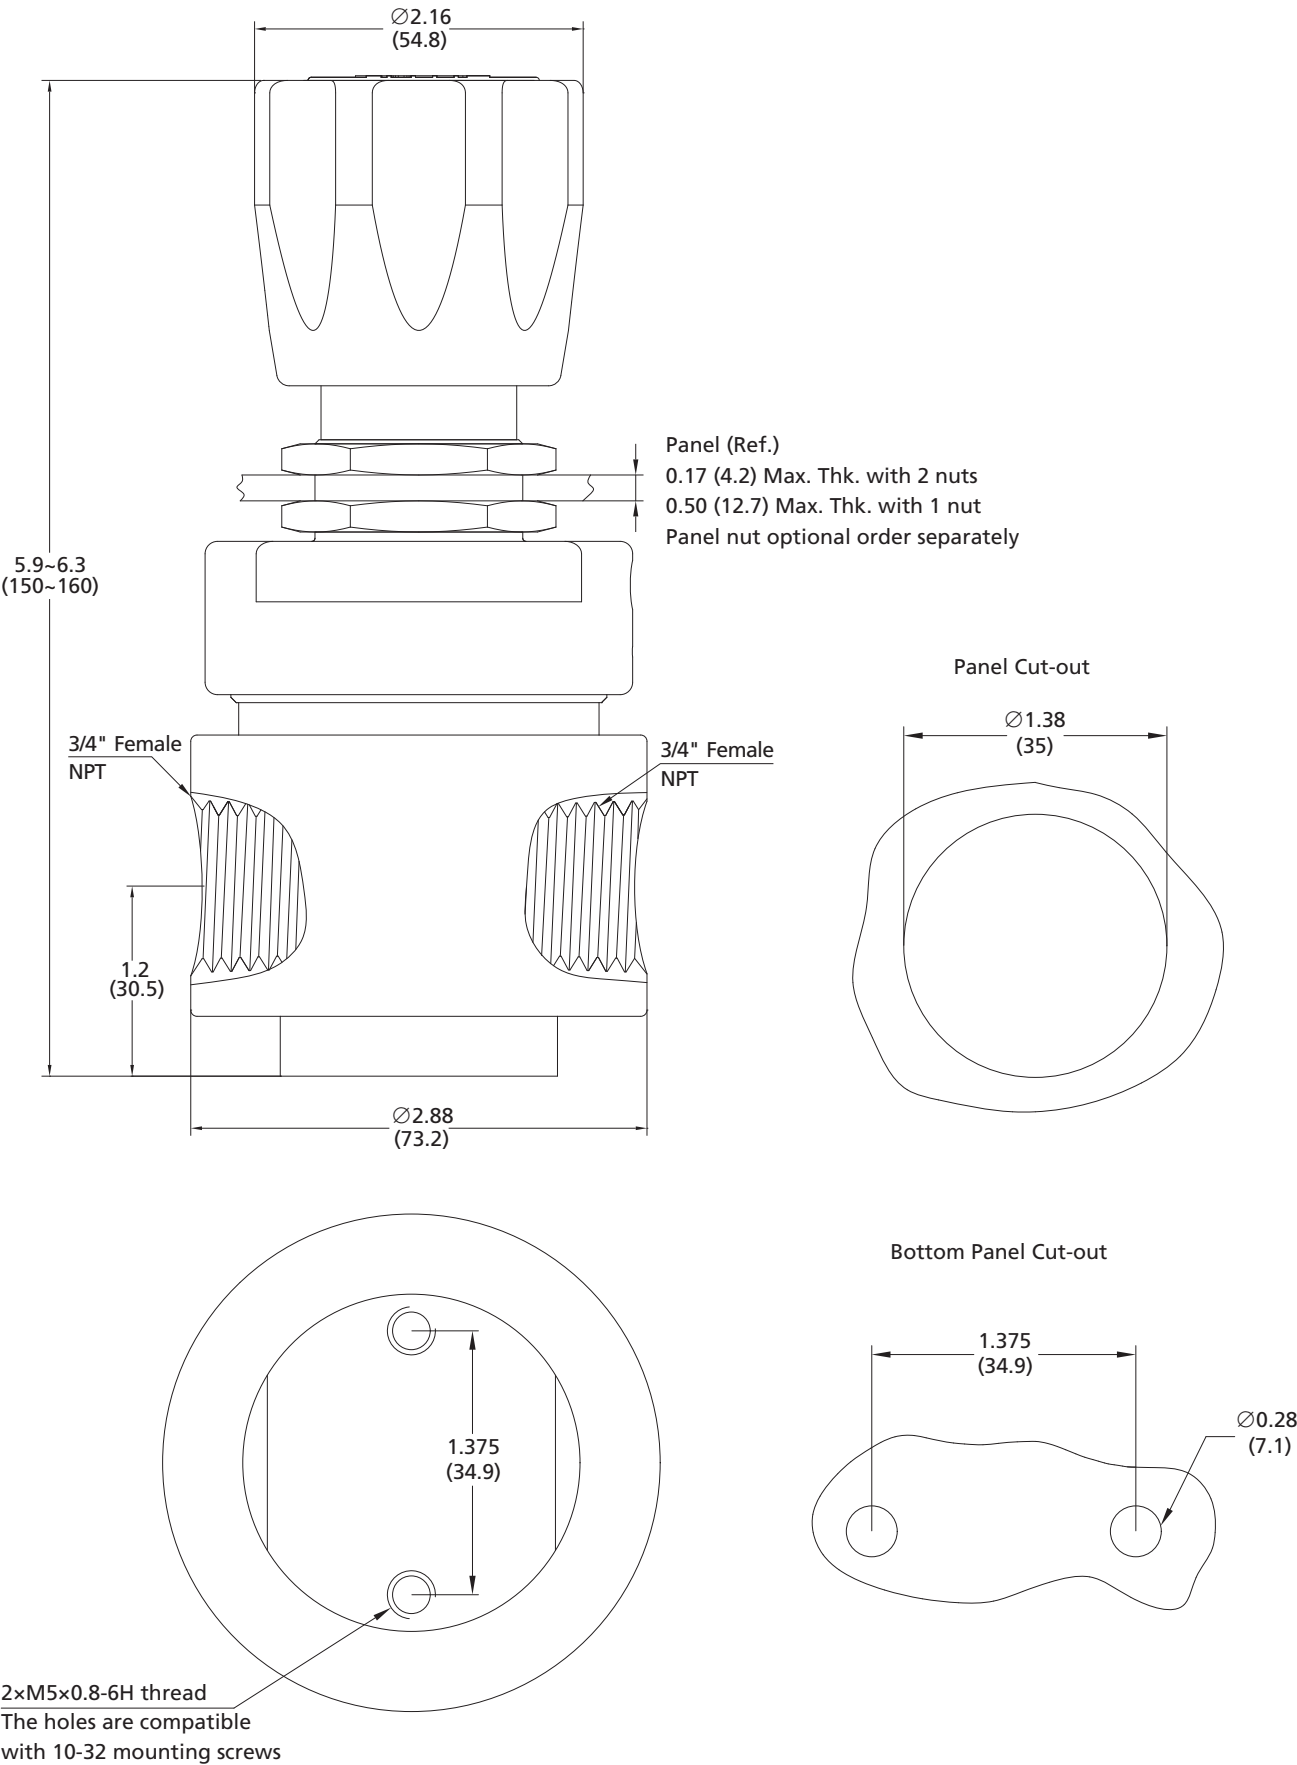

Porting Configurations

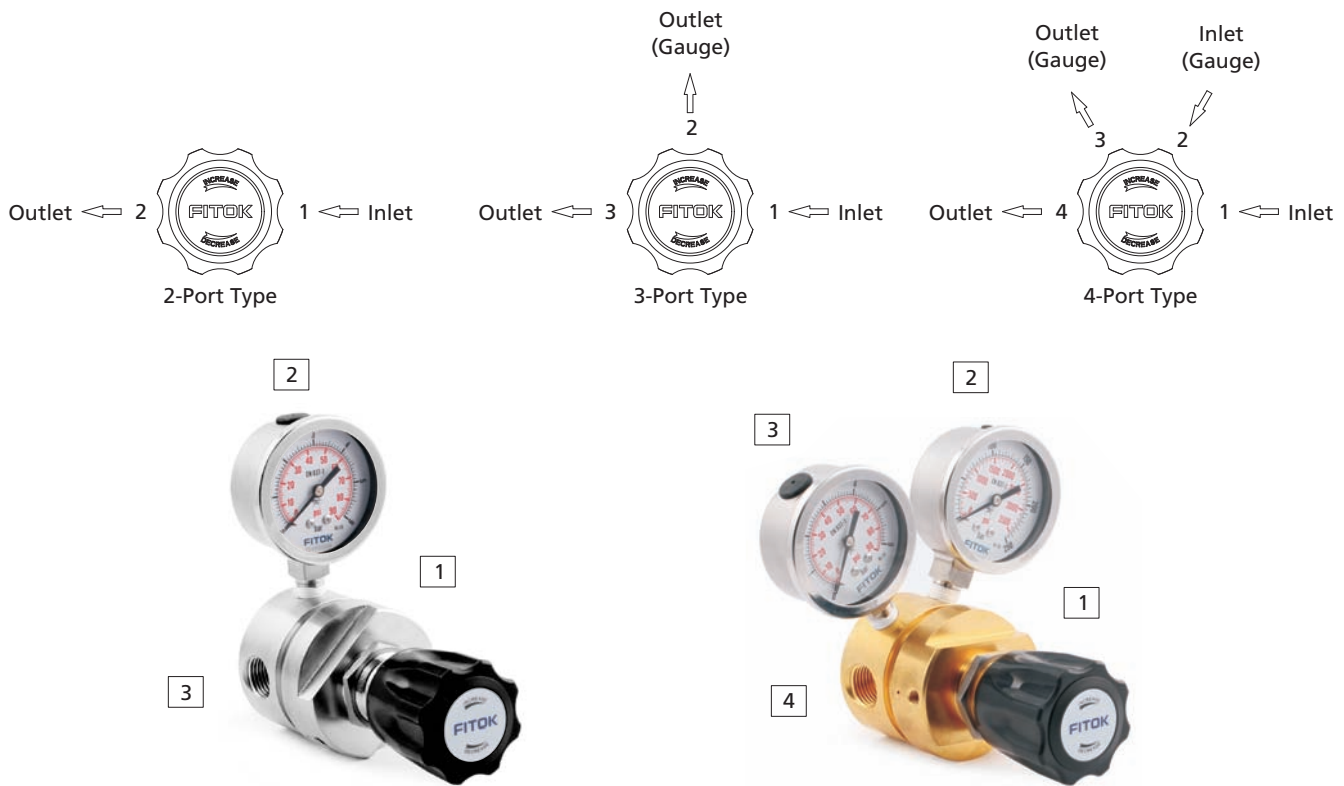

Part Number Description

FLR - 56L - 05 - 150 - 05 - B - B - 05 - Z											
Body Material		Inlet Pressure P1		Connection 1		Connection 2		Connection 3		Connection 4	
6L	316L SS	05	500 psig	05	3/4" Female NPT	B	With Gauge (psi/bar)	Same as Connection 2		Same as Connection 1	
SS	316 SS			14	3/4" Tube Fitting	M	With Gauge (MPa)				
B	Brass			16	1" Tube Fitting	P	Plug				
		Outlet Pressure Range P2		25	16 mm Tube Fitting	00	1/4" Female NPT			Installation Type	
		15	0~15 psig	26	18 mm Tube Fitting	01	1/4" Male NPT				Not Required
		30	0~30 psig	27	20 mm Tube Fitting	10	1/4" Tube Fitting			Z	Installed with One Panel Nut
		75	0~75 psig	28	22 mm Tube Fitting	11	3/8" Tube Fitting			M	Installed with Two Panel Nuts
		150	0~150 psig	Other connections are available upon request		20	6 mm Tube Fitting			N	Installed with Screws at the Bottom
						21	8 mm Tube Fitting				
						Other connections are available upon request					

Note: Most configurations are available.

Examples of part number:

1. 2-port type (1 in, 1 out): FLR-56L-05-15-05-05

2. 4-port type (2 in, 2 out): FLR-56L-05-30-05-05-05

Note: Most configurations are available.

Examples of part number:

a. 2-port type (1 in, 1 out): FLR-56L-05-15-05-05

b. 3-port type (1 in, 2 out): FLR-56L-05-30-05-B-05

c. 4-port type (2 in, 2 out): FLR-5SS-05-150-05-B-B-05

Line Pressure Regulators

FBR-1 Series Miniature Piston Regulators

Features

- Applicable to non-corrosive gases or low-viscosity liquids
- Easy to assemble and disassemble, convenient replacement of springs with different output ranges
- Robust piston-sensed design to provide safety and reliability
- With special cleaning and packaging, applicable to oxygen-enriched environments


Technical Data

- Media contact materials
Body: 316, 316L or Brass (Nickel-plated)
Seat: PCTFE, PEEK or Vespel
Piston: Aluminium Alloy
O-ring: Viton, Kalrez or Buna-N
Filter: 316L
- Operating conditions
Maximum rated inlet pressure: 6000 psig
Outlet pressure ranges: 0~80, 0~140, 0~220, 0~700, 0~1200, 0~1800 psig
Temperature: -15°F~+165°F (-26°C~+74°C)
- Functional performance
Test pressure: 150% of maximum rated pressure
Burst pressure: 300% of maximum rated pressure
Leak rates:
Internal: Bubble-tight
External: Bubble-tight
- Flow coefficient (Cv): 0.06
- Weight(regulator only): 0.93 lbs (0.4 kg)
- Body ports: 1/4" female NPT for inlet and outlet





Model: FBR-15S-60-220-00-00-00

Typical Flow Chart


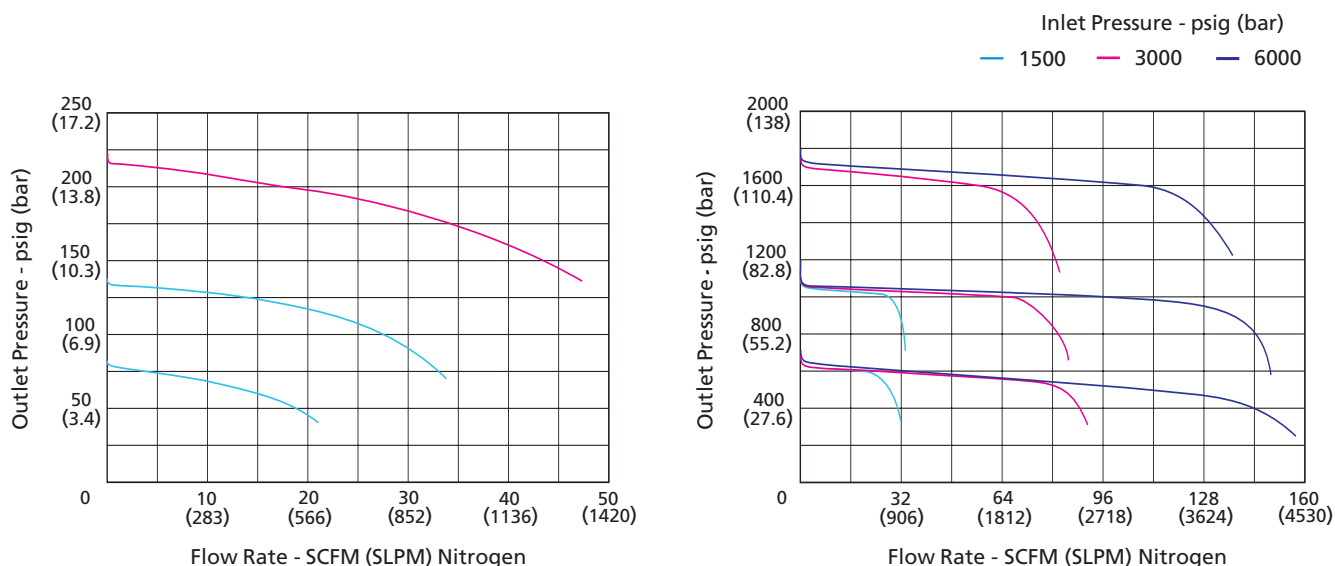


Dimensions


Dimensions, in inches (millimeters), are for reference only.

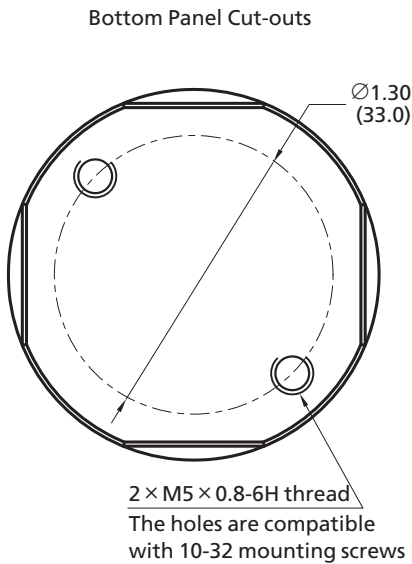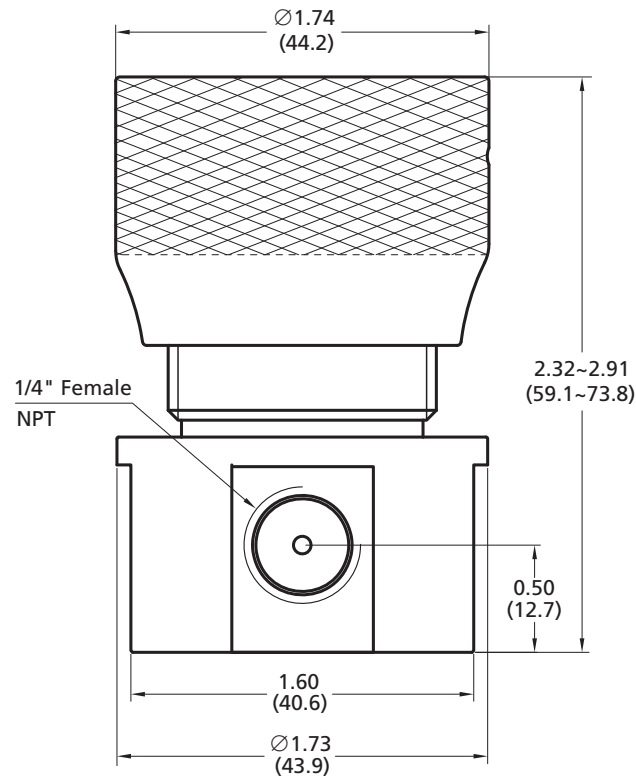

Porting Configurations

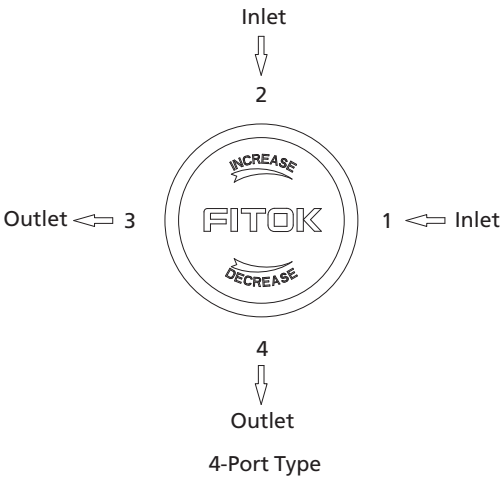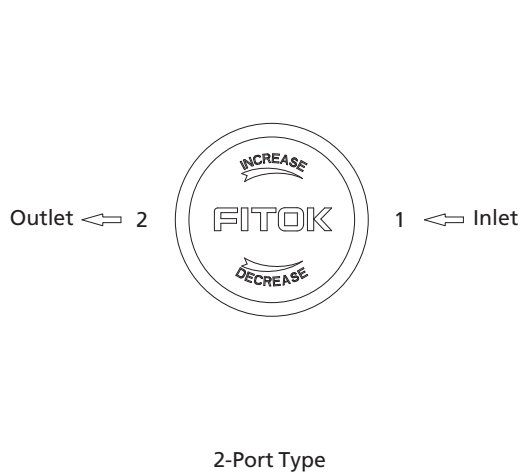

Part Number Description

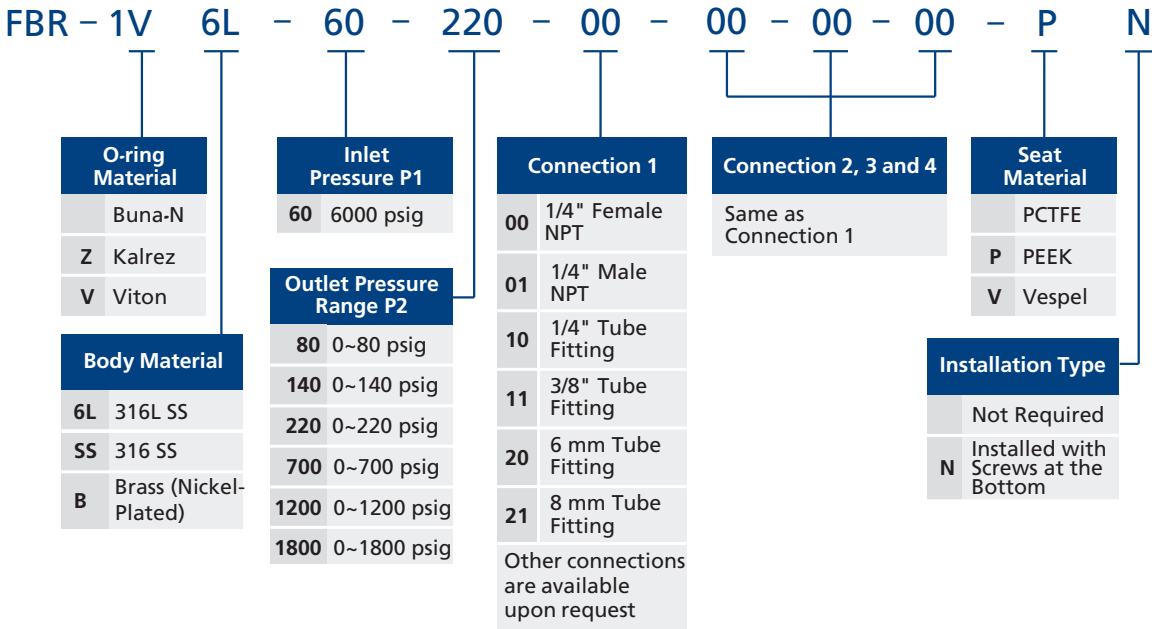

Note: Most configurations are available.
Examples of part number:
a. 2-port type (1 in, 1 out): FBR-16L-60-80-00-00
b. 4-port type (2 in, 2 out): FBR-16L-60-80-00-00-00-00

High Pressure Regulators

HPR-10 Series High Pressure Piston Regulators

Features

- ⊙ 316 Stainless steel or brass body optional
- ⊙ Robust piston sensed design
- ⊙ Stable outlet pressure and easy tune
- ⊙ 7 different outlet pressure ranges
- ⊙ All pressure ranges can be vented to 0 psig
- ⊙ Applicable to general gases or liquid
- ⊙ Panel mountable


Technical Data

- ⊙ Maximum inlet pressure:
Stainless: 10000 psig
Brass: 6000 psig
- ⊙ Outlet pressure range: 10~500, 15~800, 15~1500, 30~2500, 50~4000, 60~6000 or 200~10000 psig
- ⊙ Materials of the internal components:
Seat: PEEK
Piston: 316L
O-rings: Viton or NBR
Filter: 316L
- ⊙ Temperature: -15°F~+165°F (-26°C~+74°C)
- ⊙ Leak rates:
Internal: Bubble-tight
External: Bubble-tight
- ⊙ Flow coefficient (Cv): 0.06
- ⊙ Weight: ≈5.75 lbs (2.6 kg)
- ⊙ Body ports: 1/4" female NPT for inlet, outlet and gauge




Model: HPR-10SSN-100-100-00-00-ZV

Flow Chart

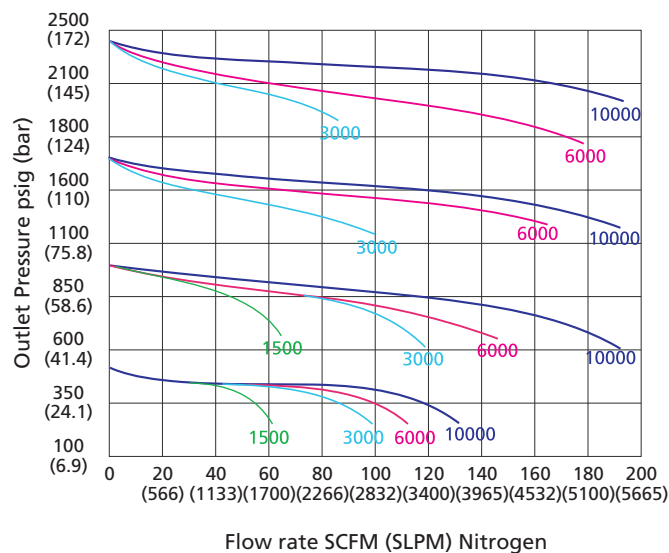


Dimensions


Dimensions, in inches (millimeters), are for reference only.

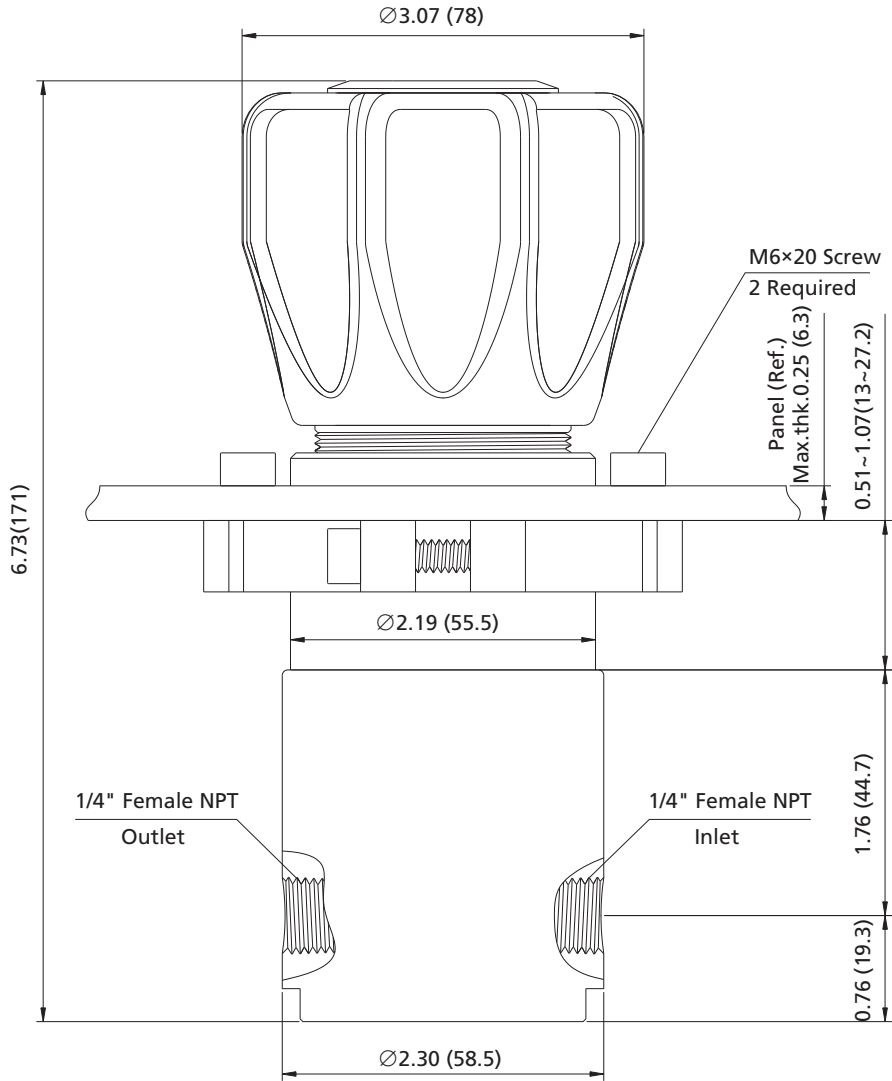


Panel Cut-outs

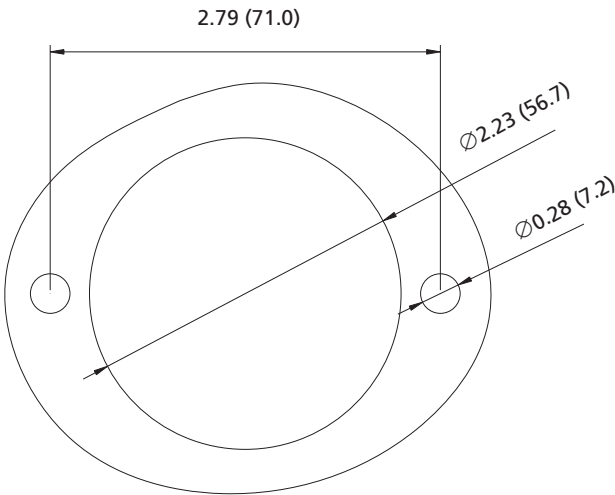

Bottom View

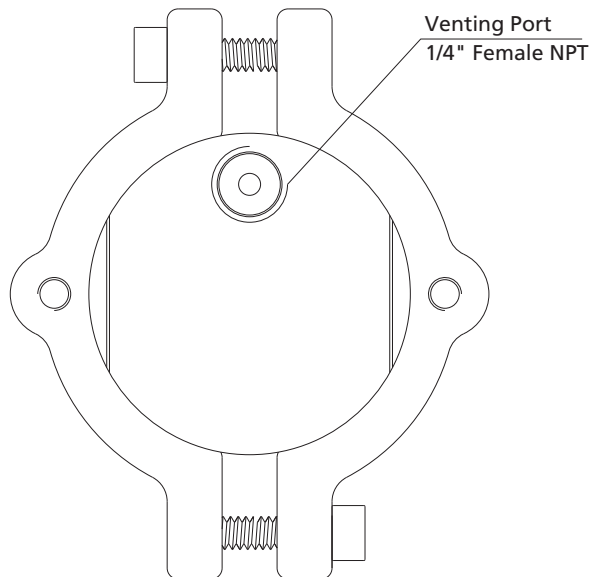

Porting Configurations

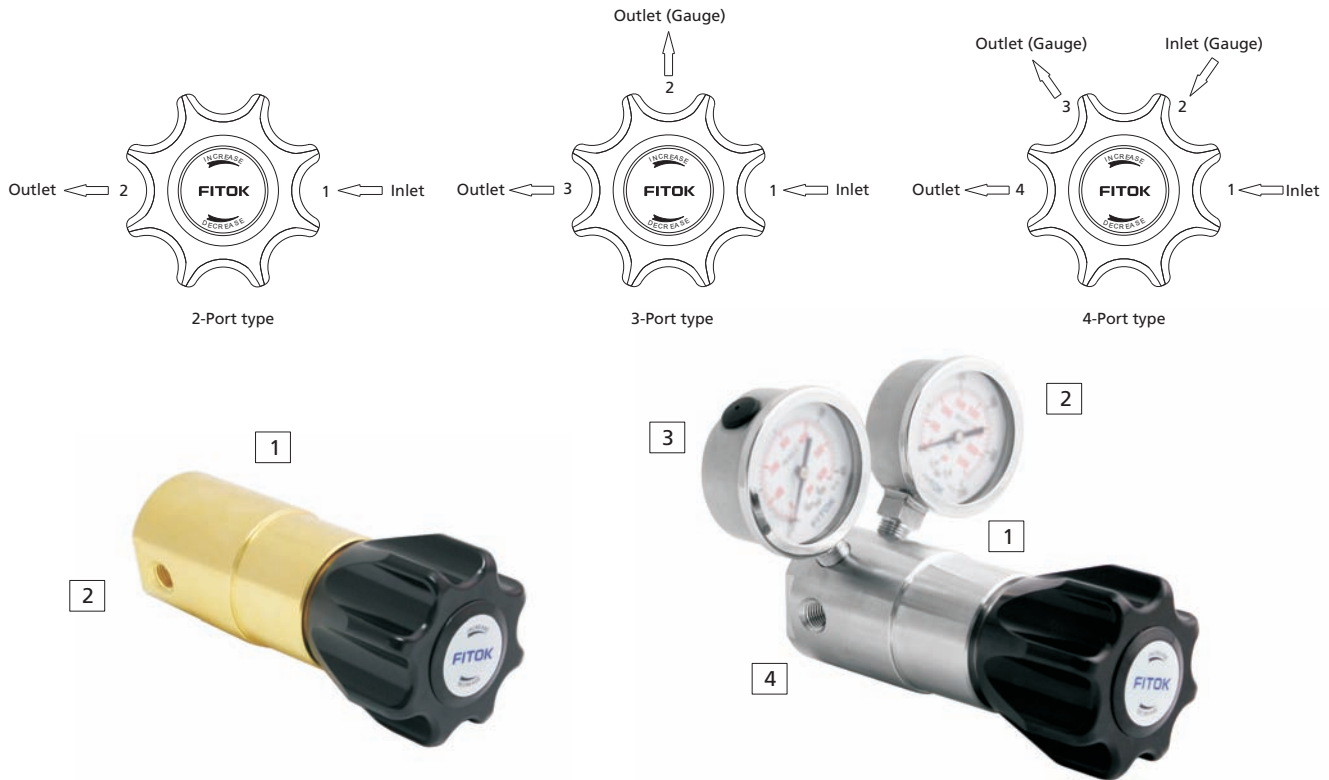

Part Number Description

HPR – 10BN–		60 –		10 –		12 –		B –		B –		00 –		ZV–F2	
Body Material		Inlet Pressure P1		Connection 1		Connection 2		Connection 3		Connection 4		Panel Mount		Vent Option	
SS	316 SS	60	6000 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	Same as Connection 2		Same as Connection 1			Without	General Purpose	
B	Brass (Max. Inlet Pressure 6000 psig)	100	10000 psig	01	1/4" Male NPT	M	With Gauge (MPa)	Z	With						
		10	1/4" Tube Fitting	P	Plug	V	With								
		11	3/8" Tube Fitting	00	1/4" Female NPT		Without								
		20	6 mm Tube Fitting	01	1/4" Male NPT		Without								
O-ring Material		Outlet Pressure Range P2		21	8 mm Tube Fitting	10	1/4" Tube Fitting	Same as Connection 1		Product Technology Grade					
	Viton	5	10~500 psig	Other connections are available upon request		11	3/8" Tube Fitting			General Purpose					
N	NBR	8	15~800 psig			20	6 mm Tube Fitting			Special Cleaning and Packaging					
		15	15~1500 psig			21	8 mm Tube Fitting								
		25	30~2500 psig			Other connections are available upon request									
		40	50~4000 psig												
		60	60~6000 psig												
		100	200~10000 psig												

Note: Most configurations are available but not everyone

Note: Most configurations are available but not everyone.

Venting port can not be blocked.

For liquid services, install the regulator with the venting port pointed vertically down.

Examples of part number:

a. 2-port type (1 in, 1 out): HPR-10SS-60-40-00-00

b. 3-port type (1 in, 2 out): HPR-10B-60-60-00-B-00

c. 4-port type (2 in, 2 out): HPR-10SS-100-25-00-B-B-00

Line Pressure Regulators

HPL-06 Series High Pressure High Flow Regulators

Features

- For high pressure and high flow applications
- Large piston sensor gives excellent sensitivity
- Balanced valve design ensures stable downstream pressure
- Three porting configurations available
- Panel mounting available
- With special cleaning and packaging, applicable to oxygen-enriched environments


Technical Data

- Maximum inlet pressure:
Stainless steel: 4500 psig
Brass: 3750 psig
- Outlet pressure ranges: 0~300, 0~600, 0~1000, 0~1500 psig
- Material of the main components:
Body: 316 SS or brass
Seat: PCTFE
Piston: 316L
O-rings: Viton or Kalrez
- Temperature: -15°F~+220°F (-25°C~+104°C)
- Leak rates:
Internal: Bubble-tight
External: Bubble-tight
- Flow coefficient (Cv): 2.0
- Weight (regulator only): ≈ 6.25 lbs (2.83 Kg)
- Body ports: 1/2" female NPT for inlet, outlet,
1/4" female NPT for gauge





Model: HPL-06SS-45-1000-04-04-Z

Typical Flow Chart

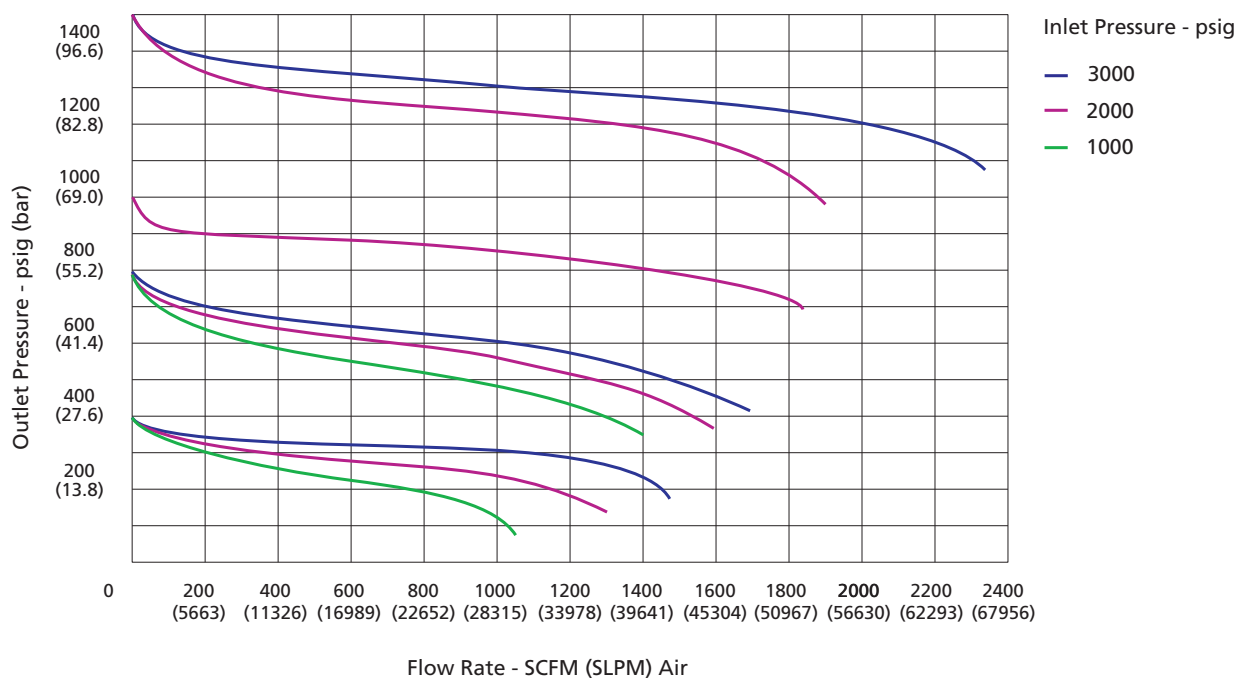


Dimensions


Dimensions, in inches (millimeters), are for reference only.

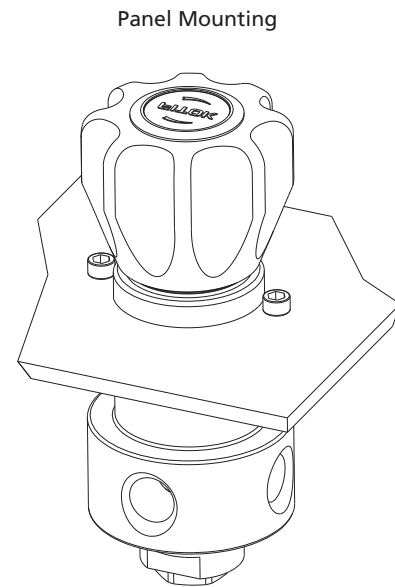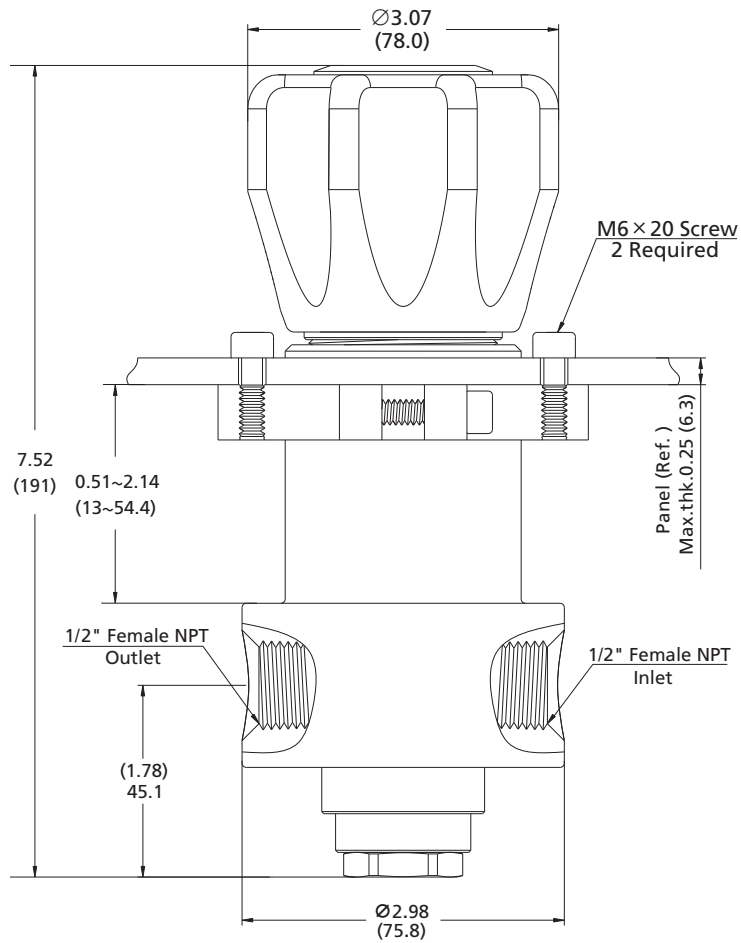


Panel Mounting Kit

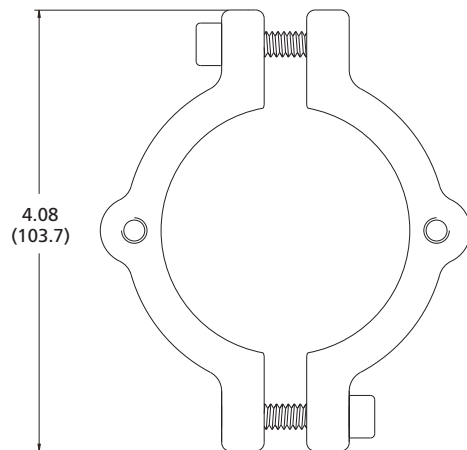

Panel Cut-out

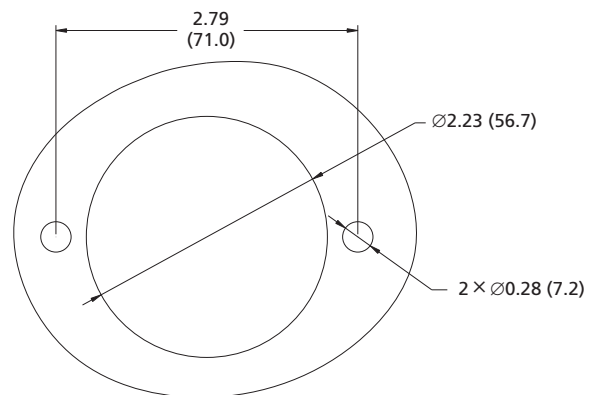

Porting Configurations

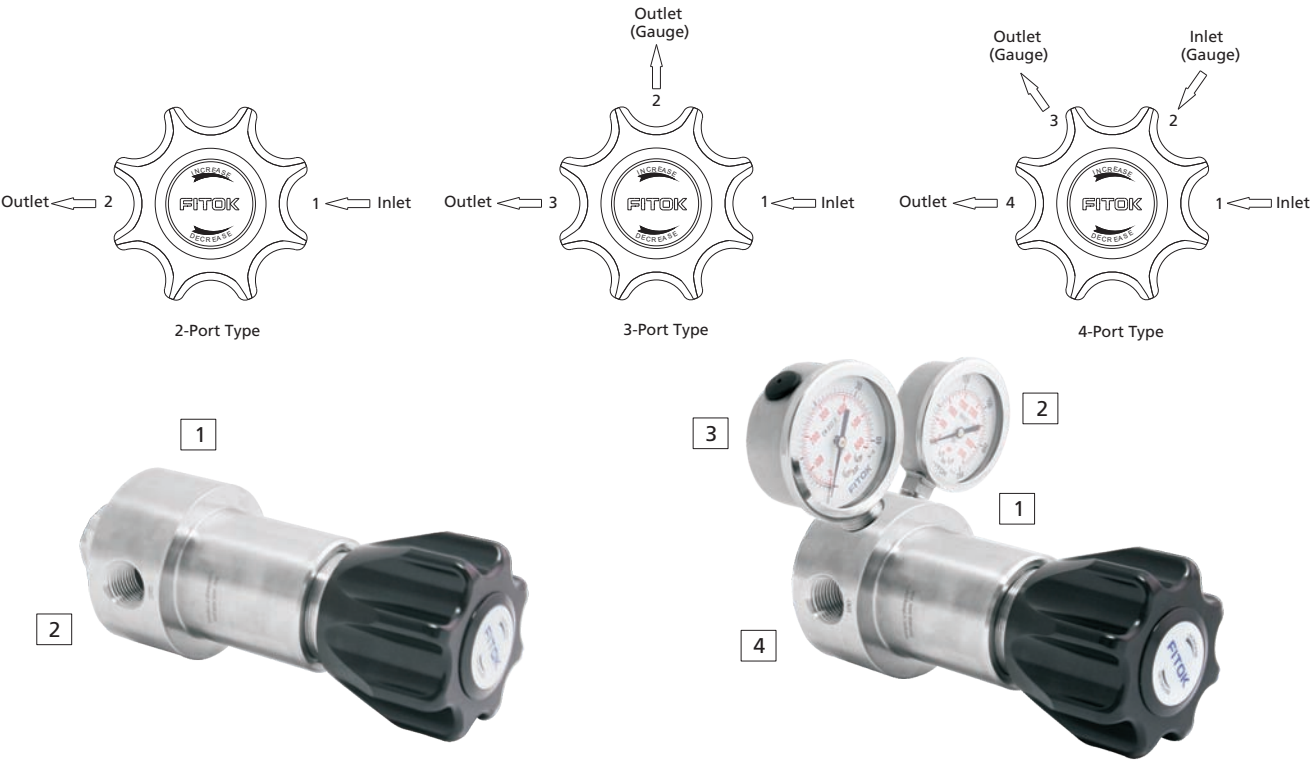

Part Number Description

HPL - 06V		Z		6L	-	45 - 600	-	04	-	B	-	B	-	04 - Z
Vent Option		Body Material		Inlet Pressure P1		Connection 1		Connection 2		Connection 3		Connection 4		
	Without	SS	316 SS	37	3750 psig	04	1/2" Female NPT	B	With Gauge (psi/bar)	Same as Connection 2				
V	With	6L	316L SS	45	4500 psig	12	1/2" Tube Fitting	M	With Gauge (MPa)					
O-ring Material		B	Brass (Max. Inlet Pressure 3750 psig)	Outlet Pressure Range P2		14	3/4" Tube Fitting	P	Plug	Same as Connection 1				
	Viton			300	0~300 psig	22	10 mm Tube Fitting	00	1/4" Female NPT					
	Z			600	0~600 psig	23	12 mm Tube Fitting	01	1/4" Male NPT					
				1000	0~1000 psig	Other connections are available upon request		10	1/4" Tube Fitting					
				1500	0~1500 psig			11	3/8" Tube Fitting					
						20	6 mm Tube Fitting			Panel Mount				
						21	8 mm Tube Fitting							
						Other connections are available upon request		Other connections are available upon request				Without		
												Z With		

Note: Most configurations are available.

Examples of part number:

Note: Most configurations are available.
Examples of part number:
a. 2-Port type (1 in, 1 out): HPL-06B-37-600-04-04
b. 3-Port type (1 in, 2 out): HPL-066L-45-1000-04-B-04
c. 4-Port type (2 in, 2 out): HPL-06SS-45-1500-04-B-B-04

Pressure Control Panels

FSR-1 Series Pressure Control Panels for Single Cylinder

Features

- ⊙ With a FCR-1 Series Regulator
- ⊙ Maximum inlet pressure up to 4500 psig
- ⊙ With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- ⊙ Anodized Aluminium panel
- ⊙ Bracket mounting as standard


Technical Data

- ⊙ Maximum inlet pressure: 3000 or 4500 psig
- ⊙ Outlet pressure range: 0~25, 0~50, 0~100, 0~250 or 0~500 psig
- ⊙ Material of the main components:
 - Seat: PCTFE (regulator and diaphragm valve)
 - Diaphragm: Hastelloy (regulator), Elgiloy (diaphragm valve)
 - Diaphragm valve body: 316L
 - Filter: 316L
- ⊙ Temperature: -10°F~+150°F (-23°C~+65°C)
- ⊙ Leak rates:
 - Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 - External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- ⊙ Flow coefficient (regulator Cv): 0.06




Model: FSR-16L-45-100-00-B-B-00-R-P

Typical Flow Chart


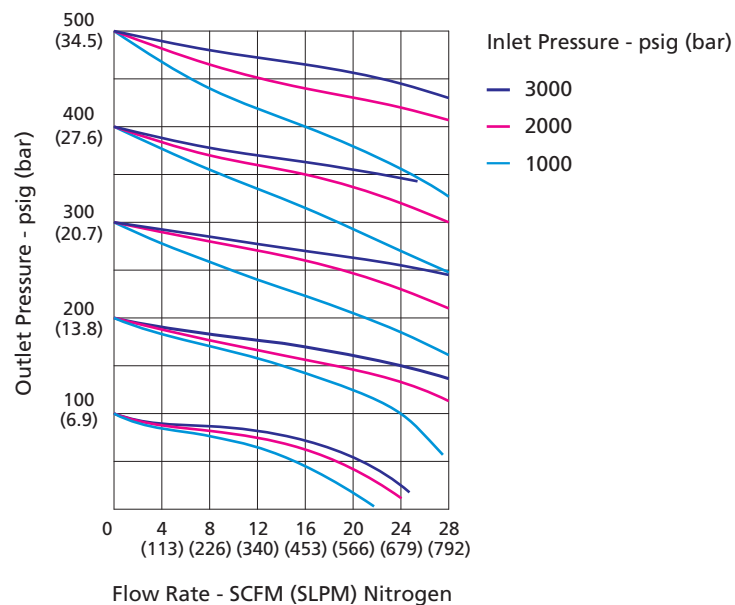


Flow Schematic

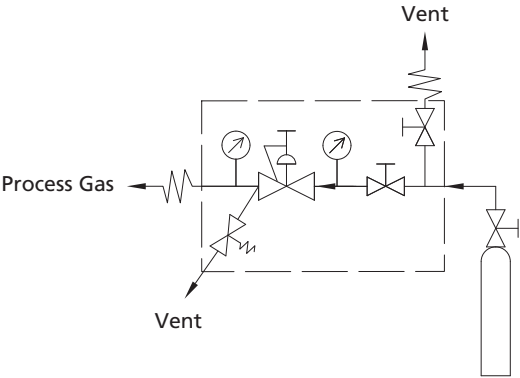


Dimensions

Dimensions, in inches (millimeters), are for reference only.

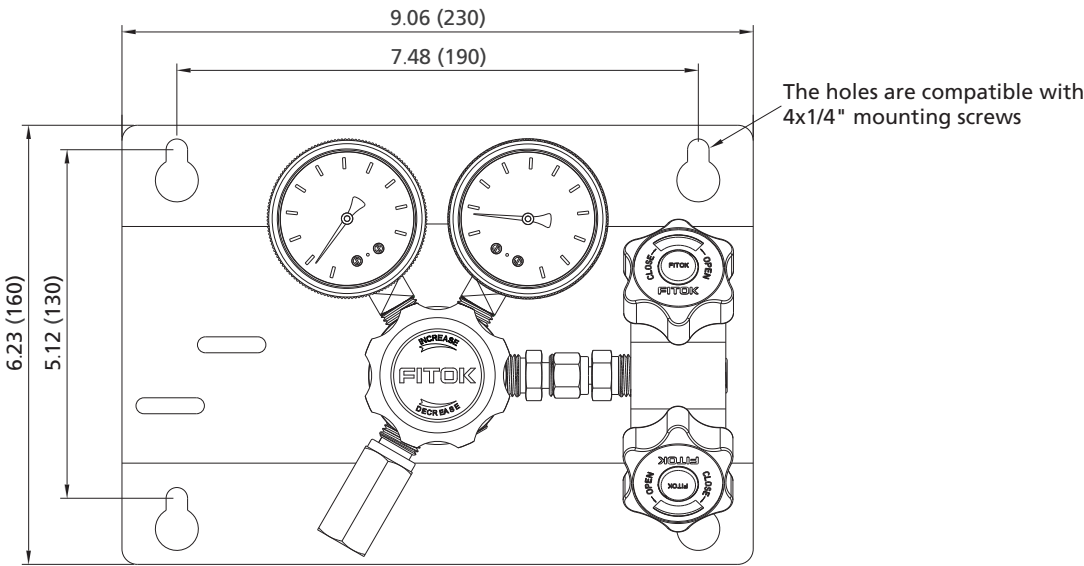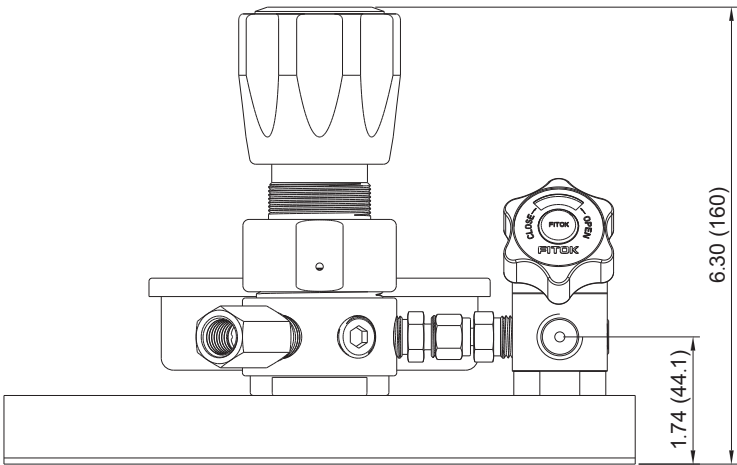

Components Introduction

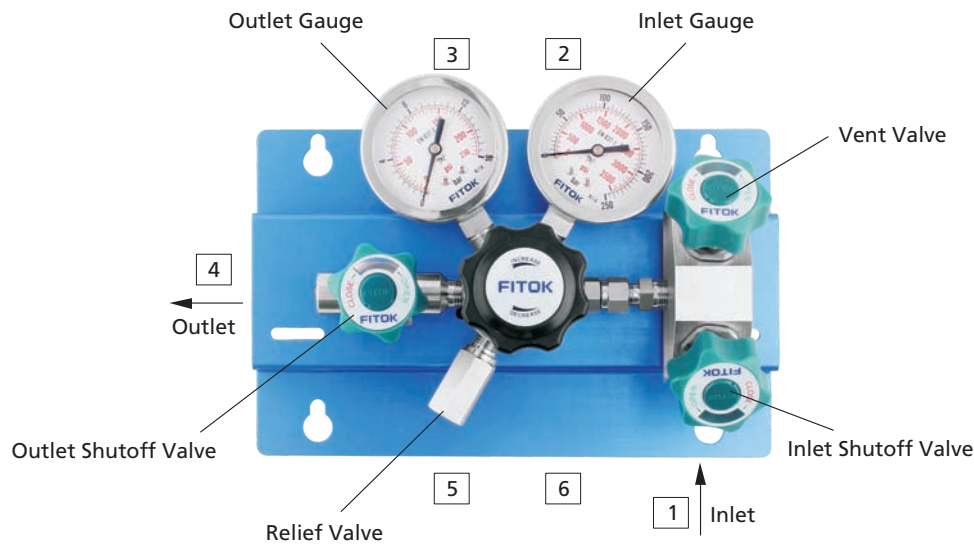

Part Number Description

FSR – 16L – 30 – 50		– 00		– B		– B		– 30		– R		– P	
Body Material (Regulator)		Connection 1		Connection 2		Connection 4		Connection 5				Connection 6	
6L	316L SS	00	1/4" Female NPT	B	With Gauge (psi/bar)	00	1/4" Female NPT	R	Relief Valve				
SS	316 SS	01	1/4" Male NPT	M	With Gauge (MPa)	01	1/4" Male NPT	P	Plug				
HC	Hastelloy C-276	10	1/4" Tube Fitting	P	Plug	10	1/4" Tube Fitting	00	1/4" Female NPT				
B	Brass (Nickel-plated)	11	3/8" Tube Fitting	00	1/4" Female NPT	11	3/8" Tube Fitting						
Inlet Pressure P1		20	6 mm Tube Fitting	Connection 3		20	6 mm Tube Fitting						
30	3000 psig	21	8 mm Tube Fitting	Same as Connection 2		30	Diaphragm Valve with 1/4" Female NPT						
45	4500 psig	Other connections are available upon request				31	Diaphragm Valve with 1/4" Male NPT						
Outlet Pressure Range P2						32	Diaphragm Valve with 1/4" Tube Fitting						
25	0~25 psig					33	Diaphragm Valve with 3/8" Tube Fitting						
50	0~50 psig					34	Diaphragm Valve with 6 mm Tube Fitting						
100	0~100 psig					35	Diaphragm Valve with 8 mm Tube Fitting						
250	0~250 psig					Other connections are available upon request							
500	0~500 psig												

Note: Most configurations are available.

Pressure Control Panels

FSR-2 Series High Pressure Control Panels for Single Cylinder

Features

- ⦿ With a FCR-2 Series Regulator
- ⦿ Applicable to non-corrosive gases or low-viscosity liquids
- ⦿ With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- ⦿ Venting model available
- ⦿ Anodized Aluminium panel
- ⦿ Bracket mounting as standard


Technical Data

- ⦿ Maximum inlet pressure: 3000 or 4500 psig
- ⦿ Outlet pressure range: 0~750, 0~1500 or 0~2500 psig
- ⦿ Material of the main components:
 - Seat: PCTFE (regulator and diaphragm valve)
 - Piston: 316L
 - Diaphragm: Elgiloy (diaphragm valve)
 - Diaphragm valve body: 316L
 - O-ring: Viton or Kalrez
 - Filter: 316L
- ⦿ Temperature: -10°F~+150°F (-23°C~+65°C)
- ⦿ Leak rates:
 - Internal: Bubble-tight
 - External: Bubble-tight
- ⦿ Flow coefficient (regulator Cv):
 - Without vent: 0.06
 - With vent: 0.1




Model: FSR-2Z6L-45-750-00-B-B-00-P-P

Typical Flow Chart

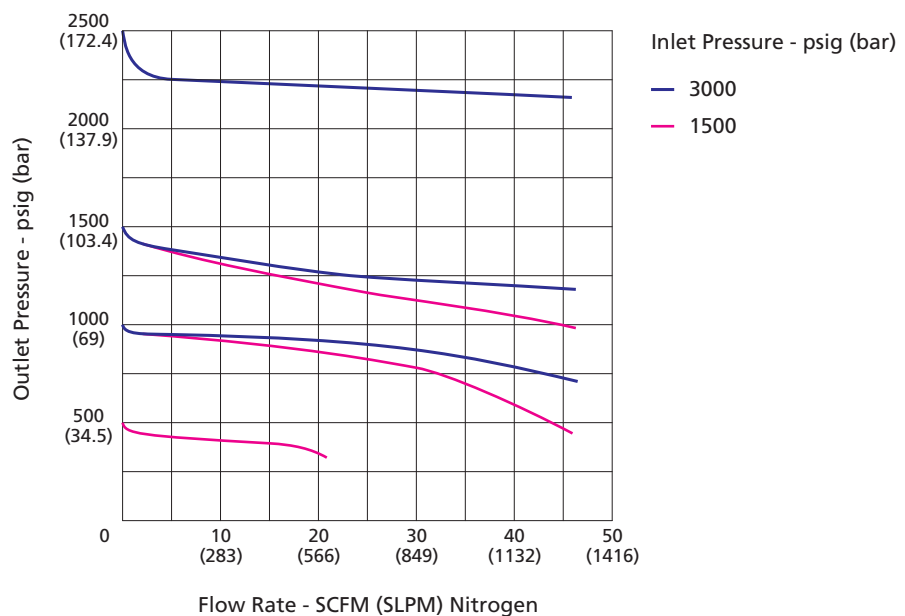


Flow Schematic

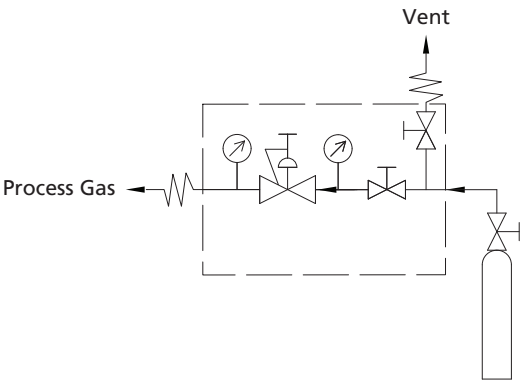


Dimensions

Dimensions, in inches (millimeters), are for reference only.

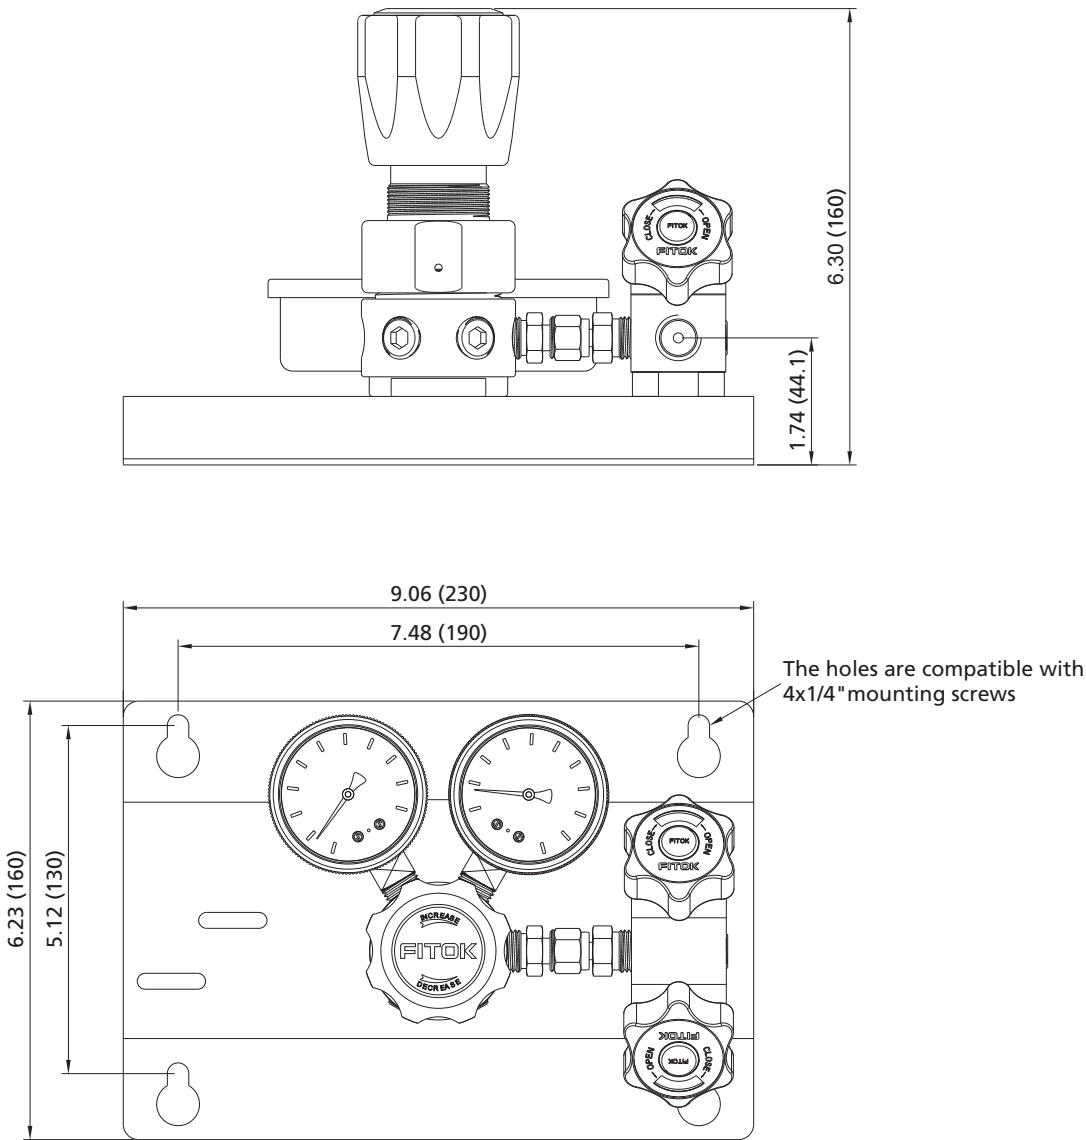

Components Introduction

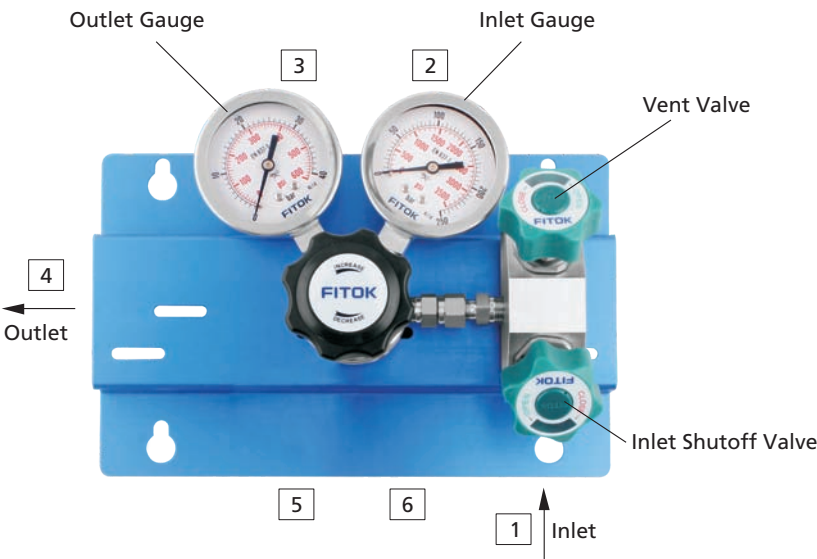

Part Number Description

FSR – 2V Z 6L – 30 – 1500 – 00 – B – B – 30 – P – P											
Vent Option		Inlet Pressure P1		Connection 1		Connection 2		Connection 4		Connection 5	
	Without	30	3000 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	00	1/4" Female NPT	R	Relief Valve
V	With	45	4500 psig	01	1/4" Male NPT	M	With Gauge (MPa)	01	1/4" Male NPT	P	Plug
O-ring Material		Outlet Pressure Range P2		10	1/4" Tube Fitting	P	Plug	10	1/4" Tube Fitting	00	1/4" Female NPT
	Viton	750	0~750 psig	11	3/8" Tube Fitting	00	1/4" Female NPT	11	3/8" Tube Fitting	Connection 6	
Z	Kalrez	1500	0~1500 psig	20	6 mm Tube Fitting	Connection 3		20	6 mm Tube Fitting	Same as Connection 5	
Body Material (Regulator)		2500	0~2500 psig	21	8 mm Tube Fitting	Same as Connection 2		21	8 mm Tube Fitting		
6L	316L SS	Other connections are available upon request		Other connections are available upon request				30	Diaphragm Valve with 1/4" Female NPT		
SS	316 SS							31	Diaphragm Valve with 1/4" Male NPT		
B	Brass (Nickel-plated)							32	Diaphragm Valve with 1/4" Tube Fitting		
						33	Diaphragm Valve with 3/8" Tube Fitting				
								34	Diaphragm Valve with 6 mm Tube Fitting		
								35	Diaphragm Valve with 8 mm Tube Fitting		
								Other connections are available upon request			

Changeover Systems

FDR-1 Series Manual Changeover System (up to 500 psig)

Features

- ⦿ A small manual changeover system with a regulator similar to FCR-1 Series Regulators
- ⦿ Connecting with two independent gas sources at a time, gas source selected through diaphragm valves
- ⦿ Applicable to corrosive or toxic gases
- ⦿ With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- ⦿ Anodized Aluminium panel




Model: FDR-16L-30-500-00-B-B-01-00-R


Technical Data

- ⦿ Maximum inlet pressure: 3000 or 4500 psig
- ⦿ Outlet pressure range: 0~25, 0~50, 0~100, 0~250 or 0~500 psig
- ⦿ Material of the main components:
 - Seat: PCTFE (regulator and diaphragm valve)
 - Diaphragm: Hastelloy (regulator), Elgiloy (diaphragm valve)
 - Diaphragm valve body: 316L
 - O-ring: Viton
- ⦿ Temperature: -10°F~+150°F (-23°C~+65°C)
- ⦿ Leak rates:
 - Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 - External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- ⦿ Flow coefficient (regulator Cv): 0.06

Typical Flow Chart


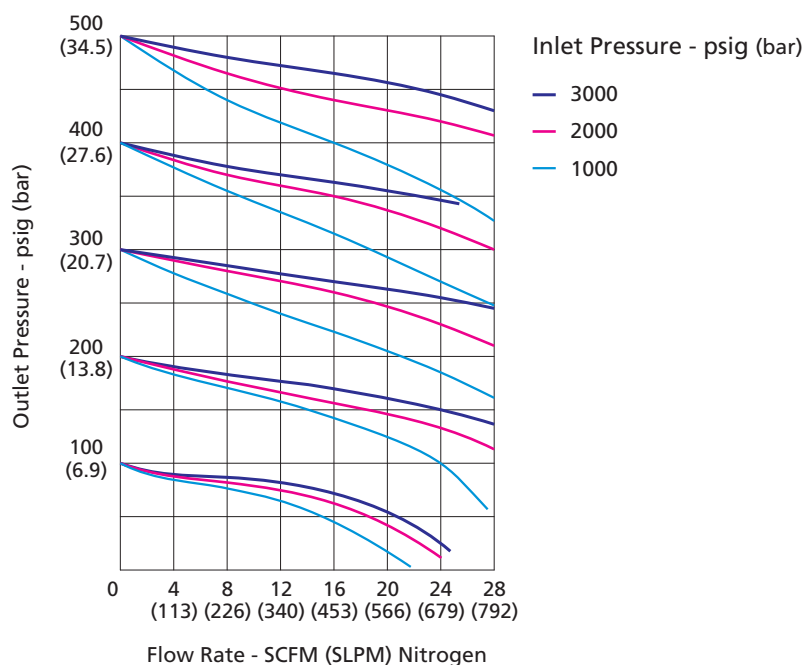


Flow Schematic

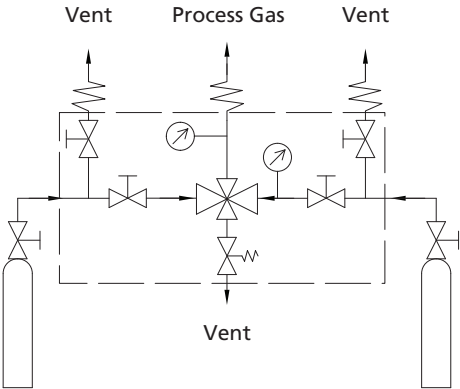


Dimensions

Dimensions, in inches (millimeters), are for reference only.

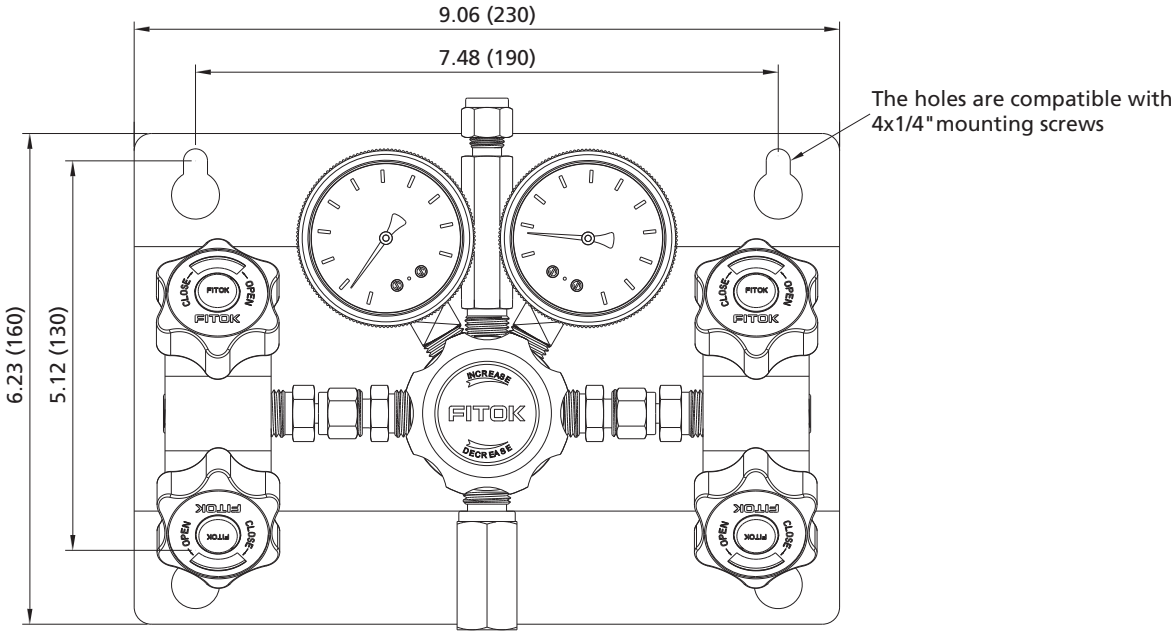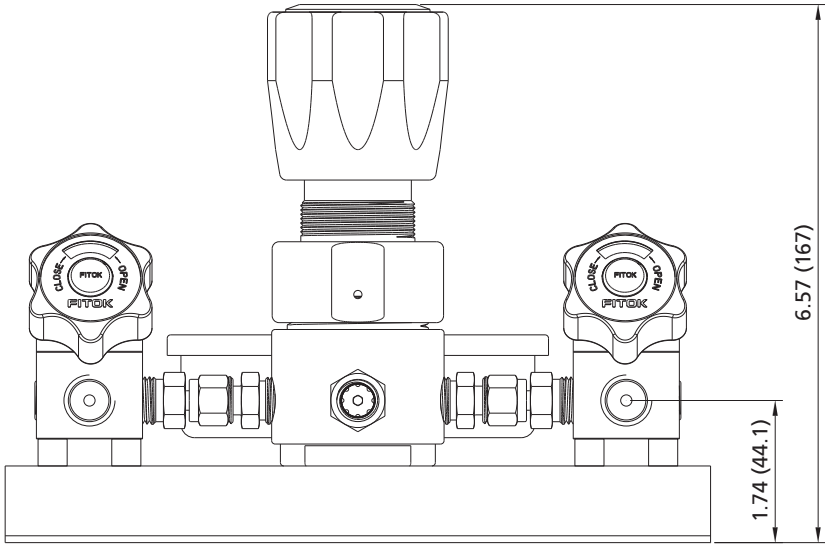

Components Introduction

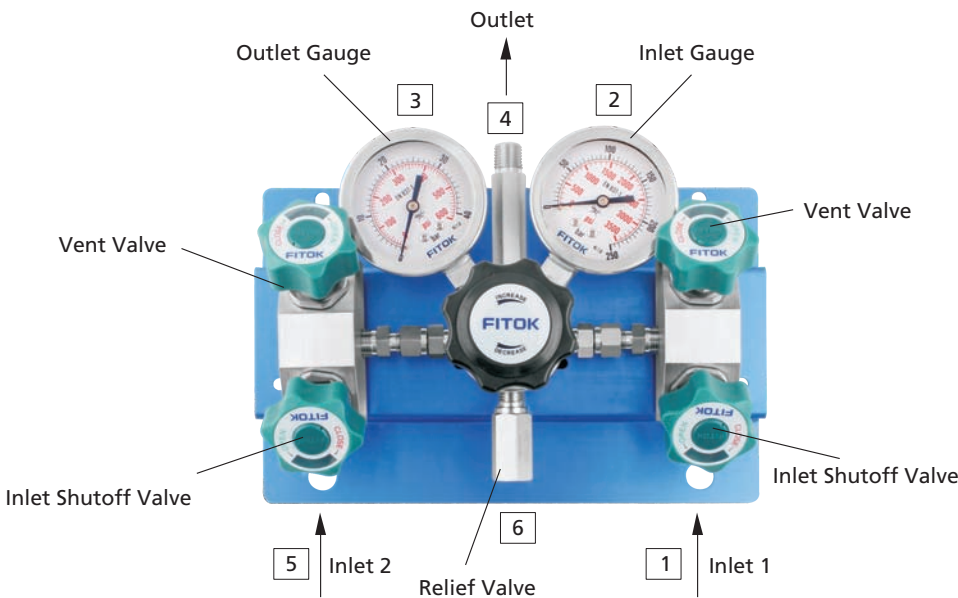

Part Number Description

FDR		-	16L	-	30	-	250	-	00	-	B	-	B	-	01	-	00	-	R
Body Material (Regulator)		Inlet Pressure P1		Outlet Pressure Range P2		Connection 1		Connection 2		Connection 3		Connection 4		Connection 5		Connection 6			
6L	316L SS	30	3000 psig	25	0~25 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	Same as Connection 2		00	1/4" Female NPT	Same as Connection 1		R	Relief Valve		
SS	316 SS	45	4500 psig	50	0~50 psig	01	1/4" Male NPT	M	With Gauge (MPa)			01	1/4" Male NPT			P	Plug		
HC	Hastelloy C-276			100	0~100 psig	10	1/4" Tube Fitting	P	Plug			10	1/4" Tube Fitting			00	1/4" Female NPT		
B	Brass (Nickel-plated)			250	0~250 psig	11	3/8" Tube Fitting	00	1/4" Female NPT			11	3/8" Tube Fitting						
				500	0~500 psig	20	6 mm Tube Fitting					20	6 mm Tube Fitting						
						21	8 mm Tube Fitting					21	8 mm Tube Fitting						
						Other connections are available upon request						Other connections are available upon request							

Changeover Systems

FDR-2 Series Manual Changeover System (up to 2500 psig)

Features

- ⦿ A small manual changeover system with a regulator similar to FCR-2 Series Regulators
- ⦿ Connecting with two independent gas sources at a time, gas sources switched through diaphragm valves
- ⦿ Applicable to non-corrosive gases
- ⦿ Venting model available
- ⦿ Anodized Aluminium panel




Model: FDR-2VSS-45-2500-00-B-B-01-00


Technical Data

- ⦿ Maximum inlet pressure: 3000 or 4500 psig
- ⦿ Outlet pressure range: 0~750, 0~1500 or 0~2500 psig
- ⦿ Material of the main components:
 - Seat: PCTFE (regulator and diaphragm valve)
 - Piston: 316L
 - Diaphragm: Elgiloy (diaphragm valve)
 - Diaphragm valve body: 316L
 - O-ring: Viton or Kalrez
 - Filter: 316L
- ⦿ Temperature: -10°F~+150°F (-23°C~+65°C)
- ⦿ Leak rates:
 - Internal: Bubble-tight
 - External: Bubble-tight
- ⦿ Flow coefficient (regulator Cv):
 - Without vent: 0.06
 - Vent: 0.1

Typical Flow Chart

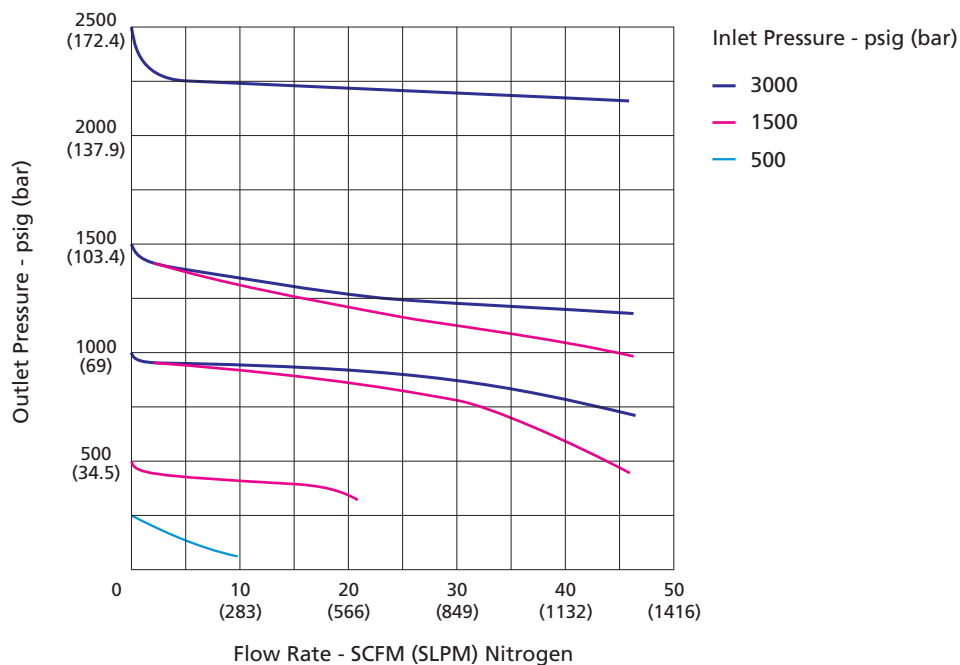


Flow Schematic

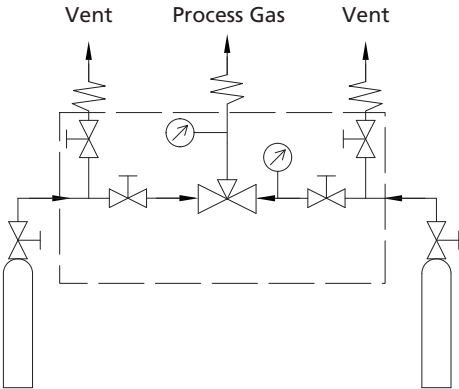


Dimensions

Dimensions, in inches (millimeters), are for reference only.

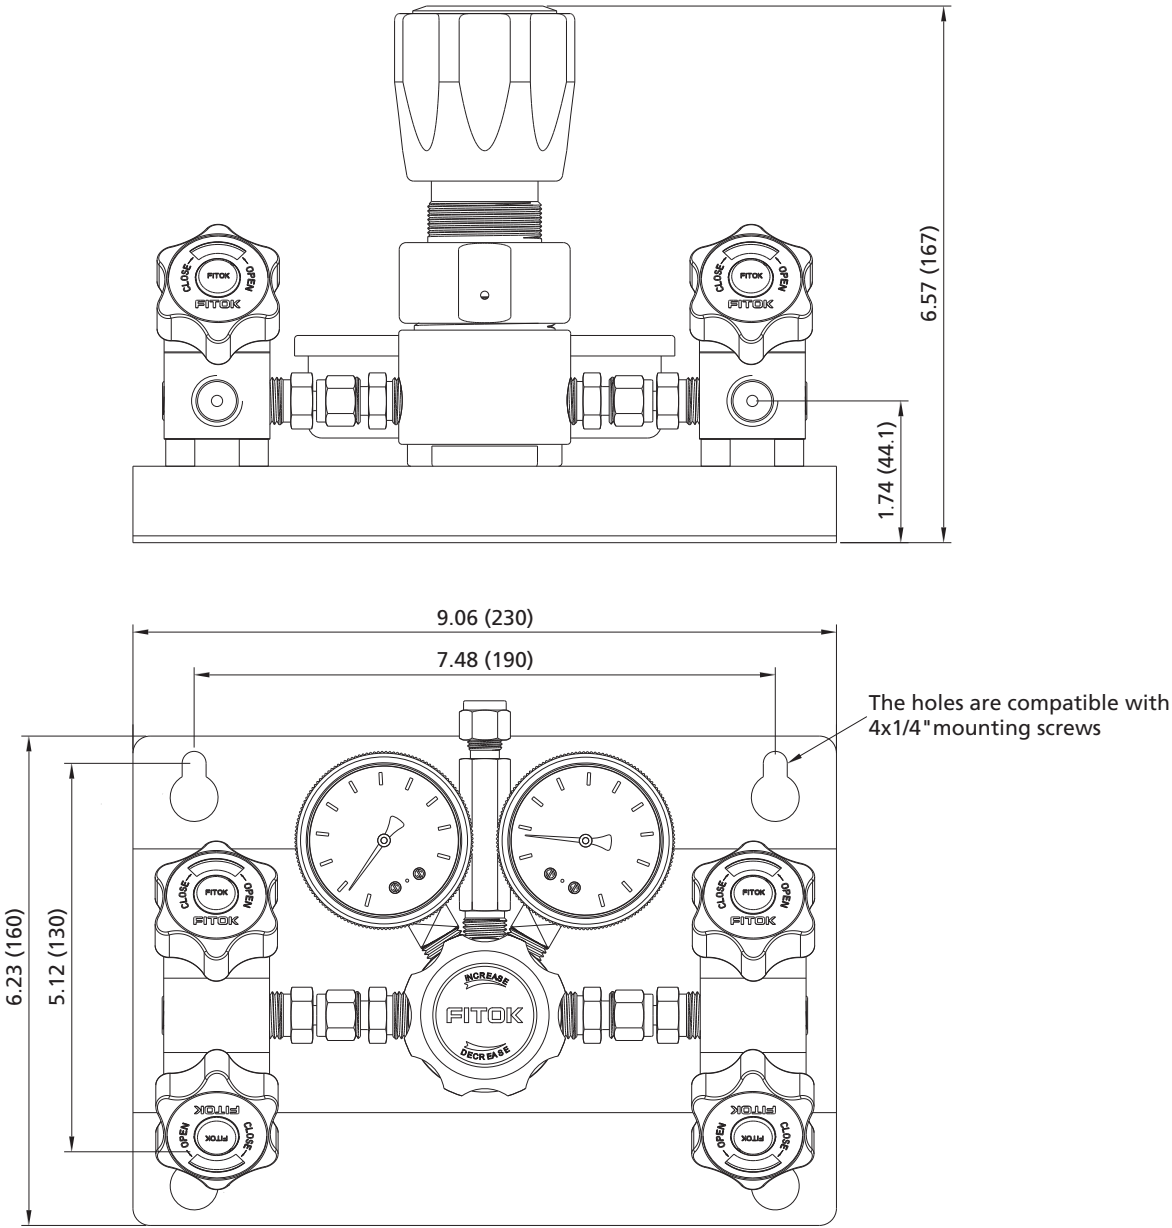

Components Introduction

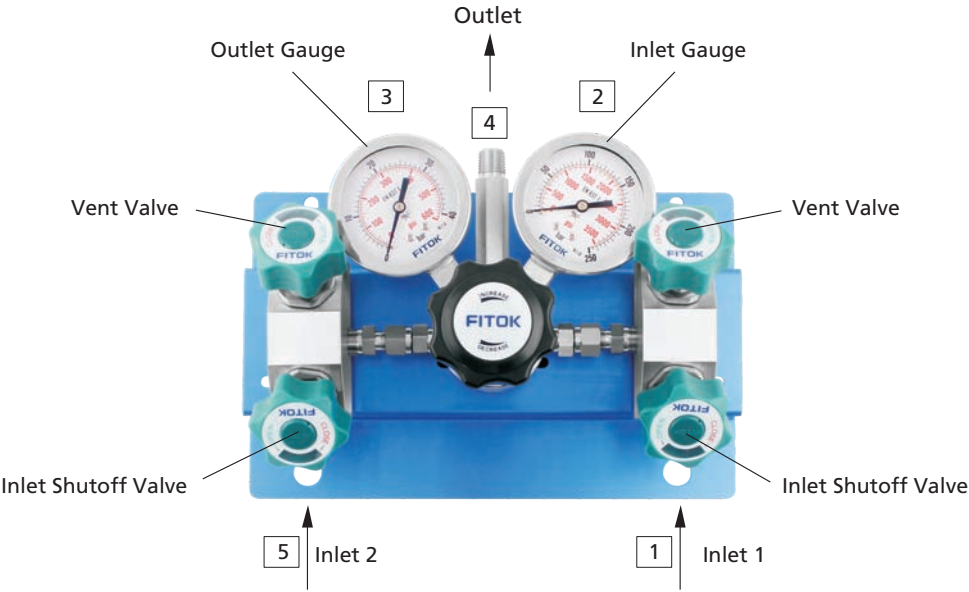

Part Number Description

FDR - 2V Z 6L - 30 - 750 - 00 - B - B - 01 - 00

Vent Option		Inlet Pressure P1		Connection 1		Connection 2		Connection 4		Connection 5
	Without	30	3000 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	00	1/4" Female NPT	Same as Connection 1
V	With	45	4500 psig	01	1/4" Male NPT	M	With Gauge (MPa)	01	1/4" Male NPT	
O-ring Material		Outlet Pressure Range P2		10	1/4" Tube Fitting	P	Plug	10	1/4" Tube Fitting	
				11	3/8" Tube Fitting	00	1/4" Female NPT	11	3/8" Tube Fitting	
				20	6 mm Tube Fitting	Connection 3		20	6 mm Tube Fitting	
				21	8 mm Tube Fitting			21	8 mm Tube Fitting	
Body Material (Regulator)				Other connections are available upon request		Same as Connection 2		Other connections are available upon request		
6L										
SS										
B										

Changeover Systems

FDR-1L Series Automatic Changeover System without Line Pressure Regulator

Features

- With 2 regulators similar to FCR-1 Series Regulators
- Anodized Aluminium box with clearly marked panel
- With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- Automatic switching of gas source to ensure continuous gas supply
- Four fixed outlet pressure ranges available
- With special cleaning and packaging, applicable to oxygen-enriched environments




Model: FDR-1L6L-30-10-00-00-00

Technical Data

- Maximum inlet pressure: 3000 or 4500 psig
- Outlet pressure range: 85~115, 135~165, 185~215 or 235~265 psig
- Material of the main components:
 Seat: PCTFE (regulator and diaphragm valve)
 Diaphragm: Hastelloy (regulator), Elgiloy (diaphragm valve)
 Diaphragm valve body: 316L
- Temperature: -10°F~+150°F (-23°C~+65°C)
- Leak rates:
 Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- Flow coefficient (regulator Cv): 0.06
- Weight: ≈ 12.1 lbs (5.5 kg)

Flow Schematic

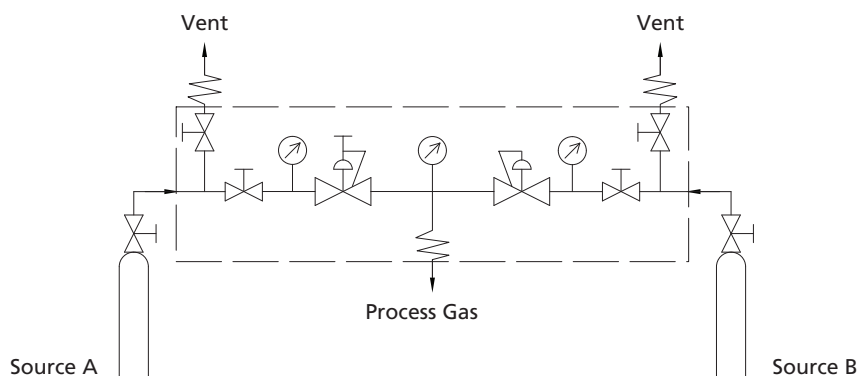

Operation Overview

The FDR-1L Series Changeover System is mainly comprised of one adjustable outlet pressure regulator together with one fixed outlet pressure regulator.

When the 2 inlets are both open, the one side that the "IN SERVICE" arrow is pointing at by turning the handle would be the 1st source for gas supply.

Fig. 1 When the "In Service" arrow is pointing at side B, side B would be the gas source. At this time, the fixed outlet pressure of side B is higher than the set pressure of side A. Consequently, the diaphragm of side A regulator moves to enable the stem to close the regulator.

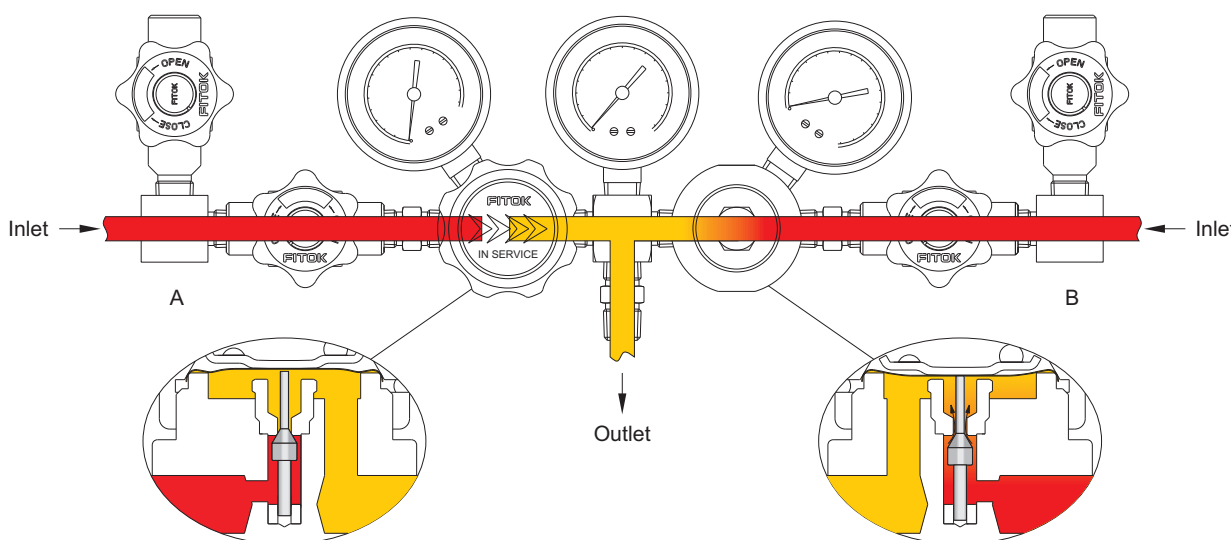


Fig. 1

Fig. 2 If side A is chosen as the gas source, the handle should be turned clockwise until the "IN SERVICE" arrow is pointing at side A. At this time, the set pressure of side A is higher than the fixed outlet pressure of side B. Consequently, the diaphragm of side B regulator moves to enable stem to close the regulator.

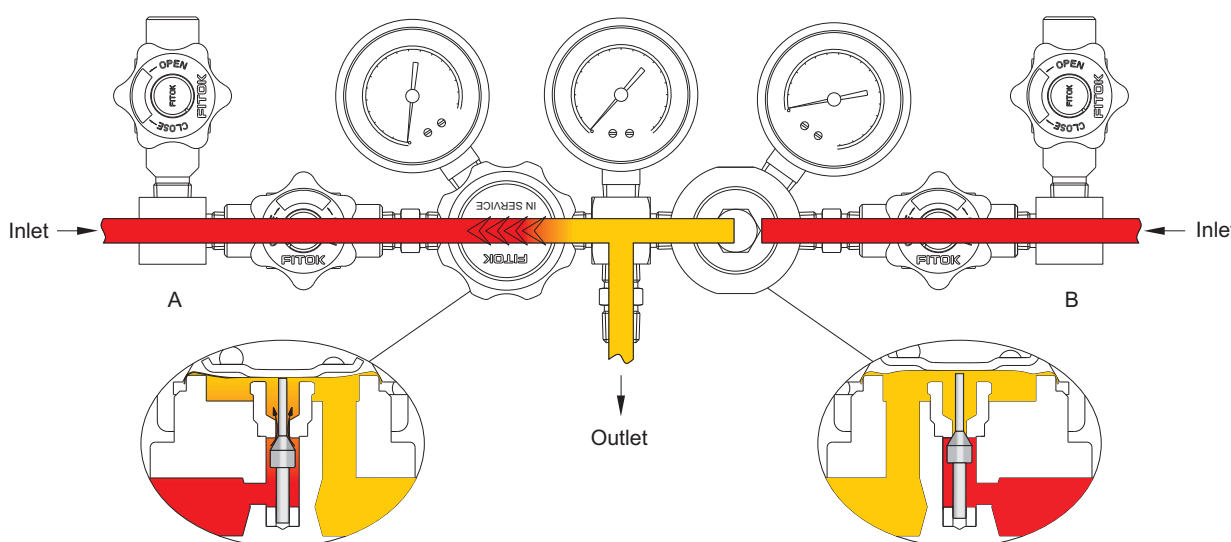


Fig. 2

When gas source of one side is depleted, gas source would automatically change to the other side.

Fig. 3 When "IN SERVICE" arrow is pointing at side B, but gas source of side B is depleted, its outlet pressure shall decrease to be lower than the set pressure of side A. By the force of spring, side A regulator will be opened to begin gas supply.

Before replacing new gas source of side B, the diaphragm valve should be turned off. Otherwise, gas from side A will flow back into side B. Then open the vent valve to exhaust the remaining pressure.

After the replacement, if the "IN SERVICE" arrow still points at side B, side B would be the gas source. If the arrow is turned towards side A, side A would thus be the gas source.


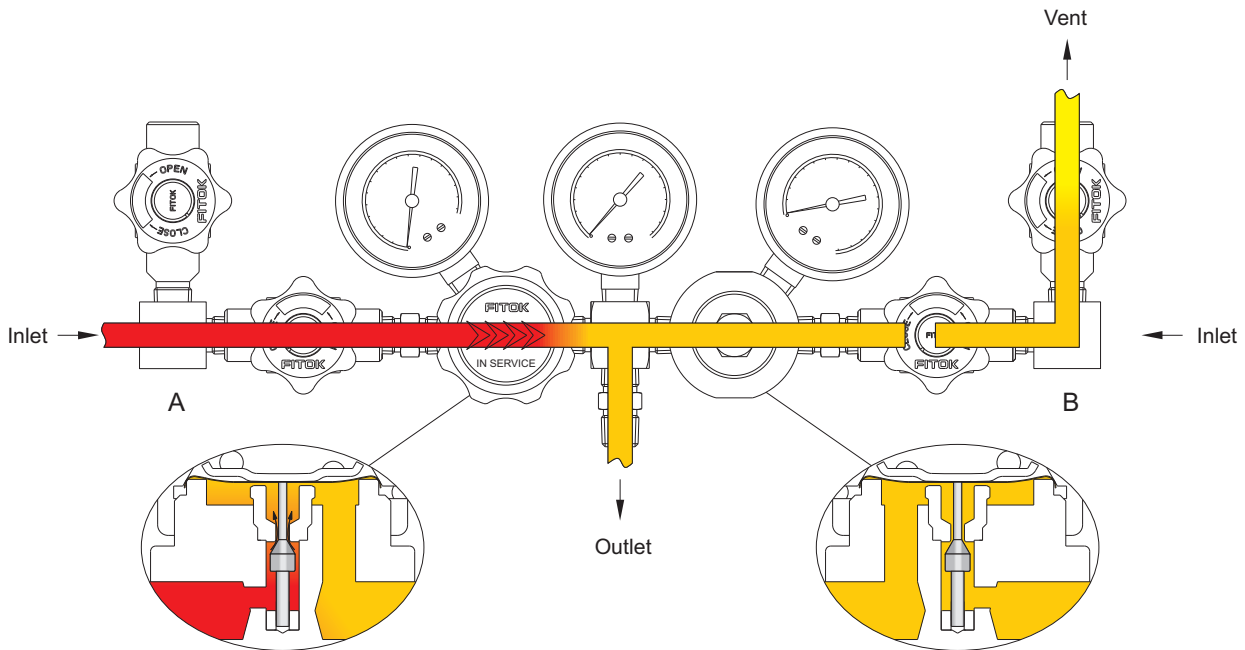


Fig. 3

Dimensions

Dimensions, in inches (millimeters), are for reference only.

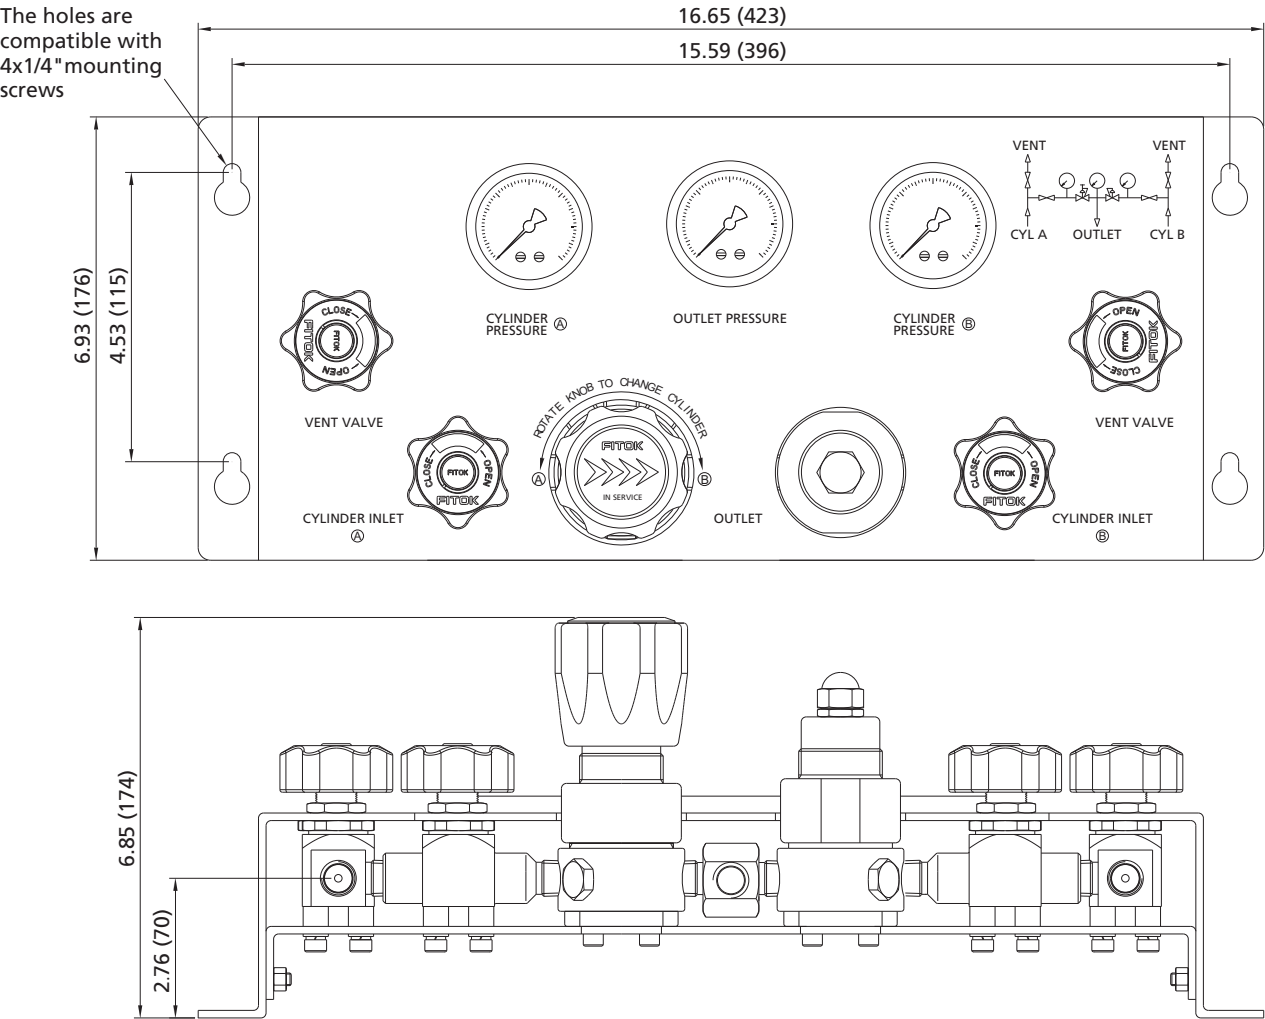

Part Number Description

FDR - 1L6L - 30 - 20 - 10 - 00 - 00

Body Material (Regulator)		Inlet Pressure P1		Outlet Pressure Range P2		Inlet A	Inlet B	Outlet
6L	316L SS	30	3000 psig	10	85~115 psig	00	Same as Inlet A	Same as Inlet A
SS	316 SS	45	4500 psig	15	135~165 psig	01		
HC	Hastelloy C-276			20	185~215 psig	10		
B	Brass (Nickel- plated)			25	235~265 psig	11		
						20		
						21		
Other connections are available upon request								

Changeover Systems

FDR-1T Series Automatic Changeover System with Line Pressure Regulator

Features

- With a FCR-1 Series Regulator and a FLR-1 Series Regulator to enable outlet pressure adjustment
- Anodized Aluminium box with clearly marked panel
- With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- Automatic switching of gas source to ensure continuous gas supply
- With special cleaning and packaging, applicable to oxygen-enriched environments




Model: FDR-1T6L-45-150-00-00-00

Technical Data

- Maximum inlet pressure: 3000 or 4500 psig
- Outlet pressure range: 0~25, 0~50, 0~100 or 0~150 psig
- Material of the main components:
 Seat: PCTFE (regulator and diaphragm valve)
 Diaphragm: Hastelloy (regulator), Elgiloy (diaphragm valve)
 Diaphragm valve body: 316L
- Temperature: -10°F~+150°F (-23°C~+65°C)
- Leak rates:
 Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- Flow coefficient (regulator Cv): 0.05
- Weight: ≈ 19.6 lbs (8.9 kg)

Flow Schematic

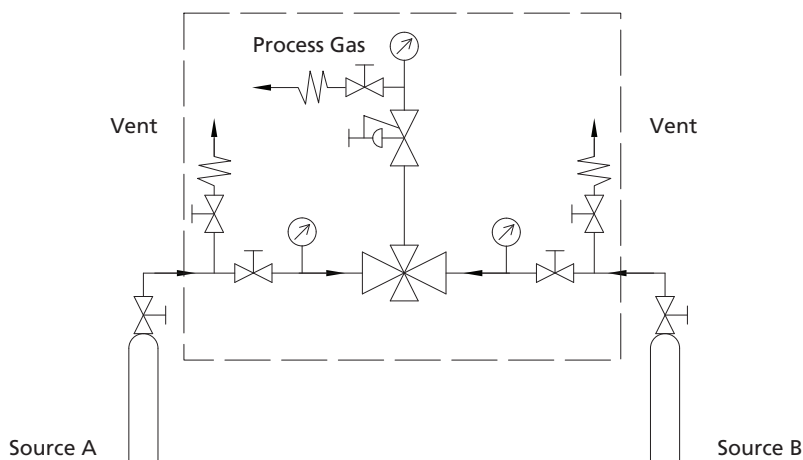

Operation Overview

The FDR-1T Series Changeover System is mainly comprised of one adjustable outlet pressure regulator and one fixed outlet pressure regulator, together with a line pressure regulator on the outlet port.

When the 2 inlets are both open, the one side that the "IN SERVICE" arrow is pointing at by turning the handle would be the 1st source for gas supply.

Fig. 1 When the "In Service" arrow is pointing at side B, side B would be the gas source. At this time, the fixed outlet pressure of side B is higher than the set pressure of side A. Consequently, the diaphragm of side A regulator moves to enable the stem to close the regulator.

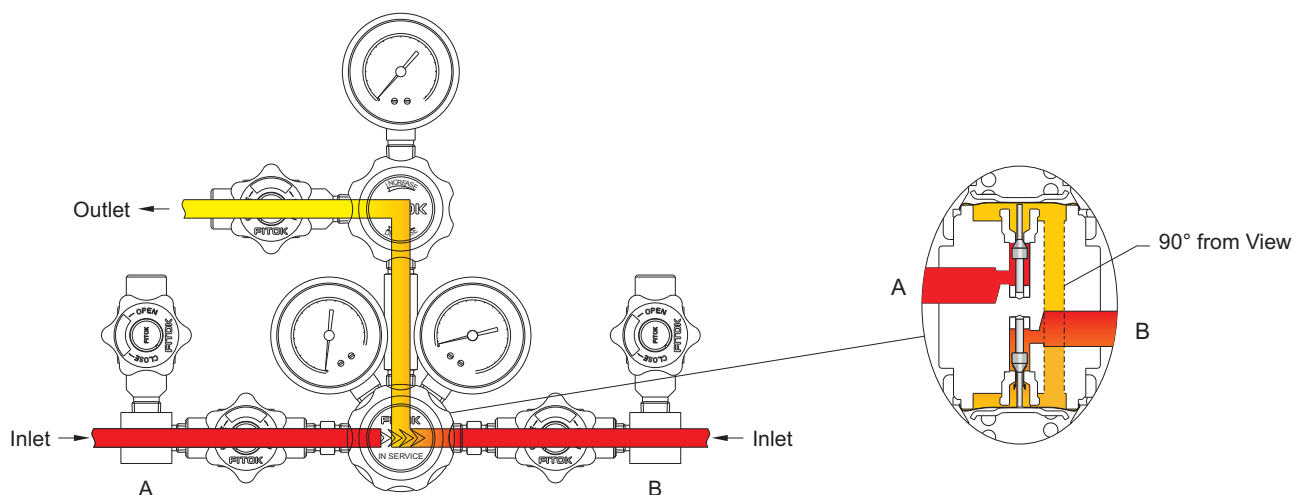


Fig. 1

Fig. 2 If side A is chosen as the gas source, the handle should be turned clockwise until the "IN SERVICE" arrow is pointing at side A. At this time, the set pressure of side A is higher than the fixed outlet pressure of side B. Consequently, the diaphragm of side B regulator moves to enable the stem to close the regulator.

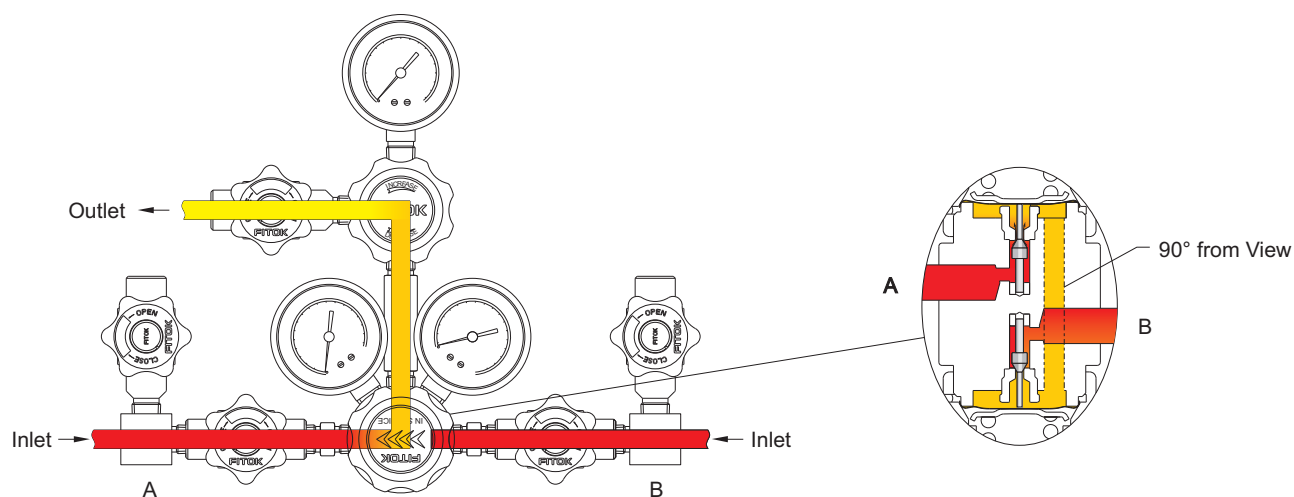


Fig. 2

When gas source of one side is depleted, gas source would automatically change to the other side.

Fig. 3 When "IN SERVICE" arrow is pointing at side B, but gas source of side B is depleted, its outlet pressure shall decrease to be lower than the set pressure of side A. By the force of spring, side A regulator will be opened to begin gas supply.

Before replacing new gas source of side B, the diaphragm valve should be turned off. Otherwise, gas from side A will flow back into side B. Then open the vent valve to exhaust the remaining pressure.

After the replacement, if the "IN SERVICE" arrow still points at side B, side B would be the gas source. If the arrow is turned towards side A, side A would thus be the gas source.


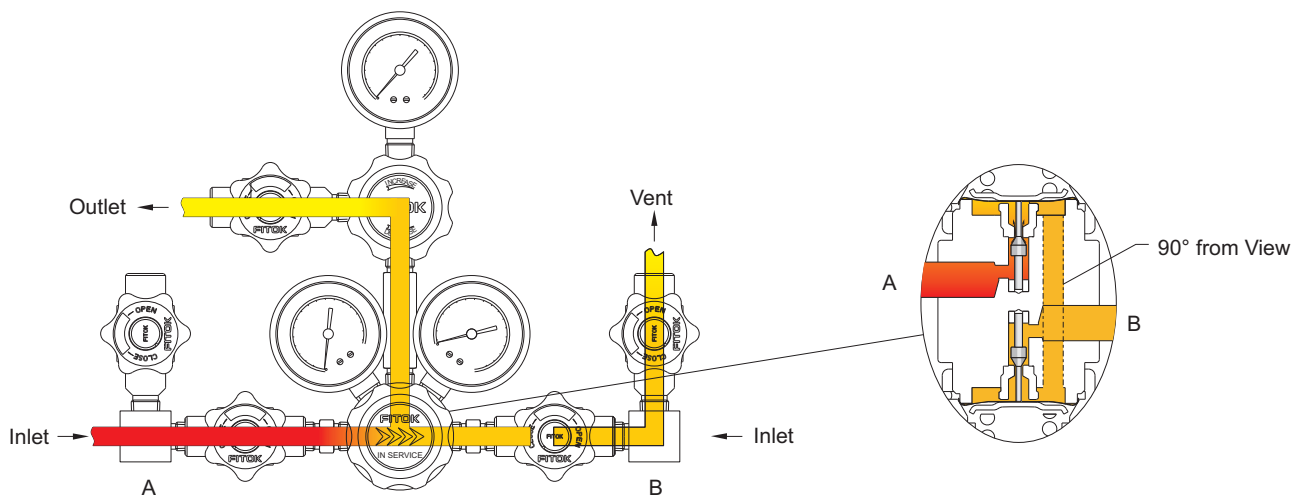


Fig. 3

Dimensions

Dimensions, in inches (millimeters), are for reference only.

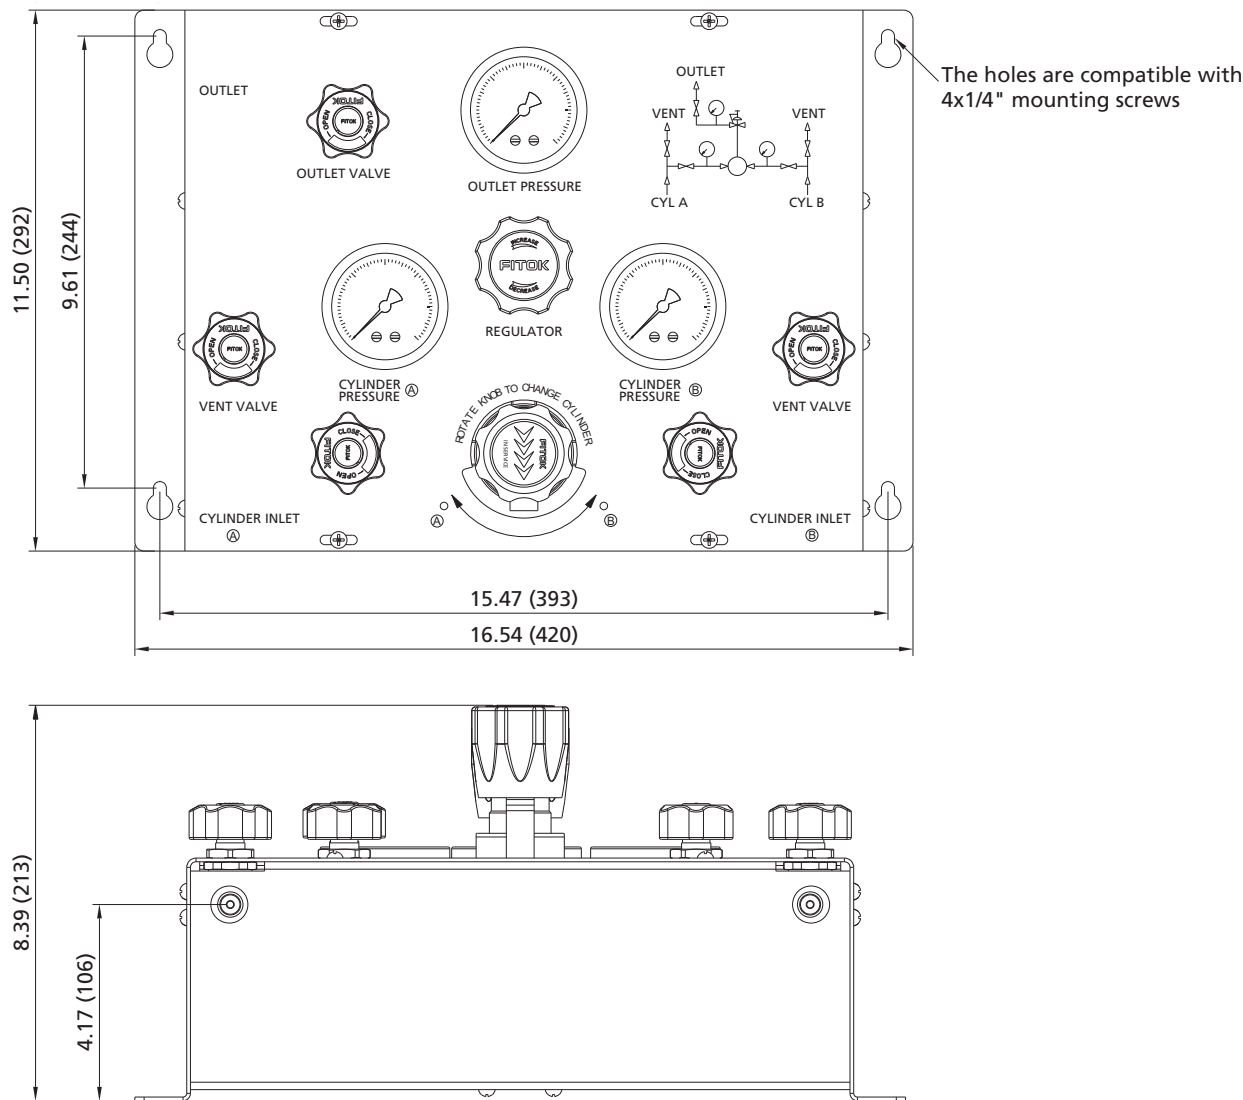

Part Number Description

FDR - 1T6L - 30 - 25 - 10 - 00 - 00

Body Material (Regulator)		Inlet Pressure P1		Outlet Pressure Range P2		Inlet A		Inlet B	Outlet
6L	316L SS	30	3000 psig	25	0~25 psig	00	1/4" Female NPT	Same as Inlet A	Same as Inlet A
SS	316 SS	45	4500 psig	50	0~50 psig	01	1/4" Male NPT		
HC	Hastelloy C-276			100	0~100 psig	10	1/4" Tube Fitting		
B	Brass (Nickel-plated)			150	0~150 psig	11	3/8" Tube Fitting		
							Other connections are available upon request		

Point-of-use Panels

FPR-1 Series Compact Regulators for Low Pressure

Features

- ⦿ With a FLR-1 Series Regulator
- ⦿ With metal diaphragm regulators
- ⦿ Shutoff valves with window to visually indicate open and closed states
- ⦿ Anodized Aluminium panel, easy to install
- ⦿ Regulator body of 316L SS or Brass optional
- ⦿ Three configurations available


Technical Data

- ⦿ Maximum inlet pressure: 1500 psig
- ⦿ Outlet pressure range: 0~25, 0~50, 0~100, 0~250 or 0~500 psig
- ⦿ Material of the main components:
 Seat: PCTFE (regulator and diaphragm valve)
 Diaphragm: Hastelloy (regulator), Elgiloy (diaphragm valve)
 Diaphragm valve body: 316L
 Filter: 316L
- ⦿ Temperature: -10°F~+150°F (-23°C~+65°C)
- ⦿ Leak rates:
 Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- ⦿ Flow coefficient (regulator Cv): 0.14



Model: FPR-1U6L-15-50-11-B-11


Typical Flow Chart

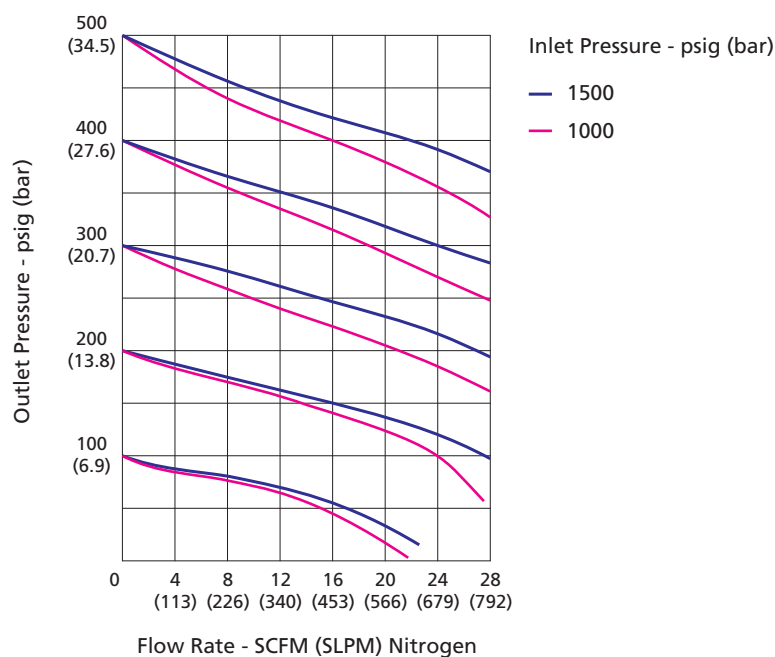


Dimensions

Dimensions, in inches (millimeters), are for reference only.


Single-outlet

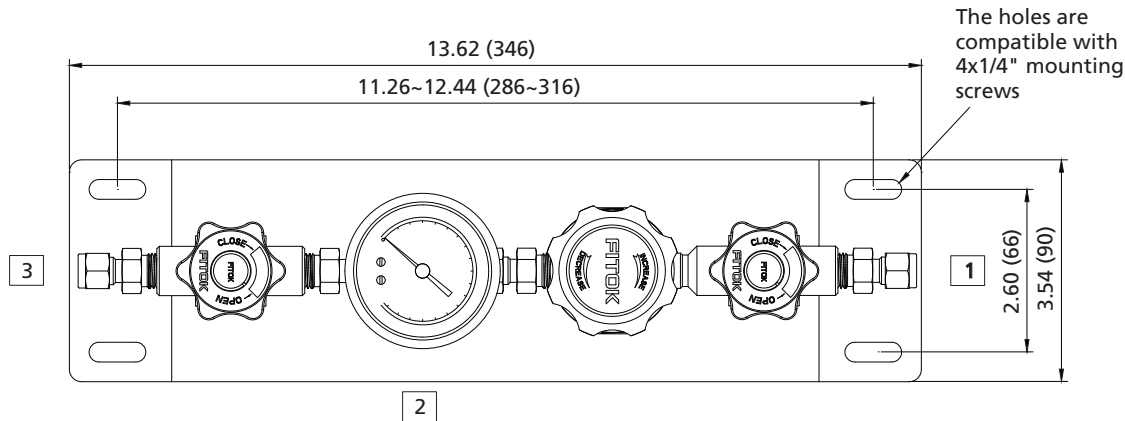


Dual-outlet

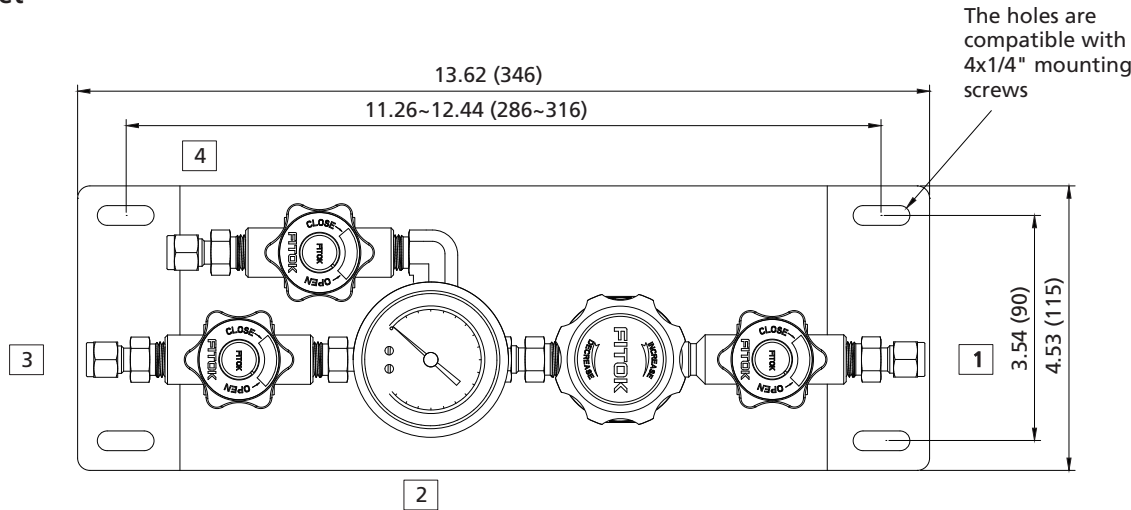

Triple-outlet

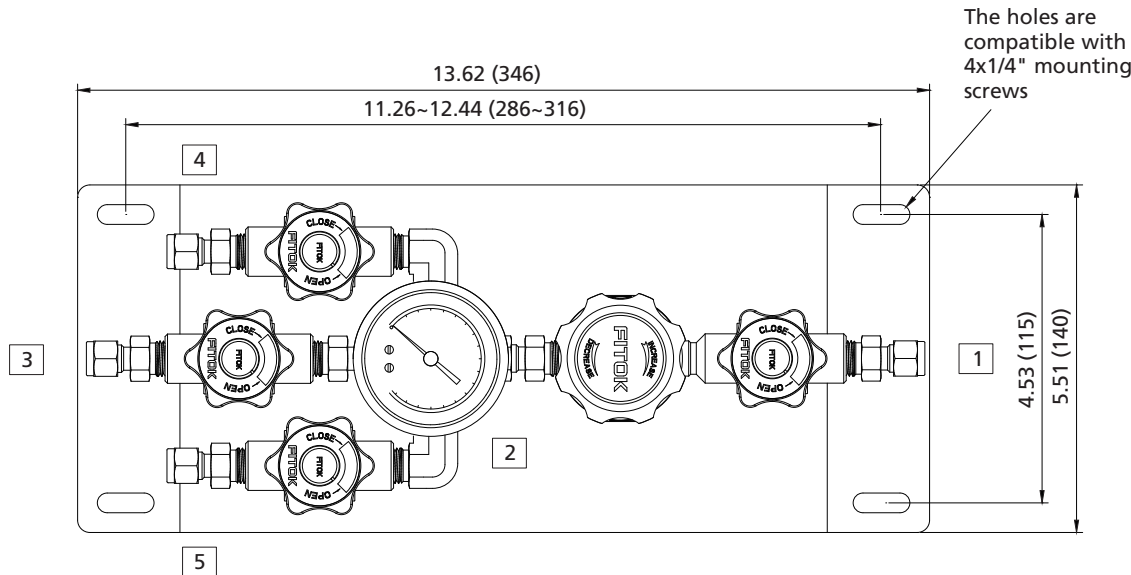

Components Introduction

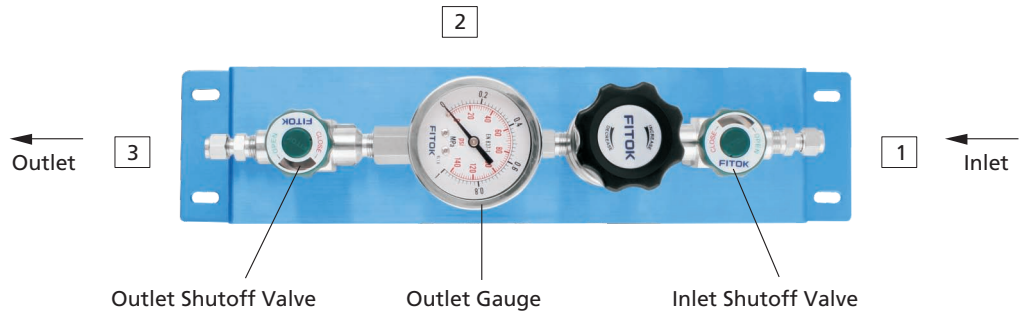

Part Number Description

FPR – 1C 6L – 15 – 100 – 10 – M – 10 – 00 – 00													
Outlet Option		Inlet Pressure P1		Connection 1		Connection 2		Connection 3		Connection 4			
U	Single-outlet	15	1500 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	00	1/4" Female NPT	Same as Connection 1			
T	Dual-outlet	Outlet Pressure Range P2	0~25 psig	01	1/4" Male NPT	M	With Gauge (MPa)	01	1/4" Male NPT	Connection 5 Same as Connection 1			
C	Triple-outlet			10	1/4" Tube Fitting	P	Plug	10	1/4" Tube Fitting				
Body Material (Regulator)				11	3/8" Tube Fitting	00	1/4" Female NPT	11	3/8" Tube Fitting				
				20	6 mm Tube Fitting	20	6 mm Tube Fitting						
				21	8 mm Tube Fitting	21	8 mm Tube Fitting						
				Other connections are available upon request		Other connections are available upon request							
6L	316L SS	50	0~50 psig	20	6 mm Tube Fitting			20	6 mm Tube Fitting				
SS	316 SS	100	0~100 psig	21	8 mm Tube Fitting			21	8 mm Tube Fitting				
HC	Hastelloy C-276	250	0~250 psig	Other connections are available upon request				Other connections are available upon request					
B	Brass (Nickel-plated)	500	0~500 psig										

Examples of part number:
a. 2-port type (1 in, 1 out): FPR-1U6L-15-50-11-B-11
b. 3-port type (1 in, 2 out): FPR-1TSS-15-100-00-B-00-00

Point-of-use Panels

FPR-1S Series Sensitive Regulators for Low Pressure

Features

- With a FCR-1S Series Regulator of large diameter metal diaphragm to provide accurate pressure control
- Shutoff valves with window to visually indicate open and closed states
- Anodized Aluminium panel, easy to install
- Three porting configurations available


Technical Data

- Maximum inlet pressure: 1500 psig
- Outlet pressure range: 0~25, 0~50, 0~100, 0~150 or 0~200 psig
- Material of the main components:
 Seat: PCTFE (regulator and diaphragm valve)
 Diaphragm: 316L (regulator), Elgiloy (diaphragm valve)
 Diaphragm valve body: 316L
 Filter: 316L
- Temperature: -10°F~+150°F (-23°C~+65°C)
- Leak rates:
 Internal: $\leq 1 \times 10^{-7}$ mbar·l/s helium
 External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- Flow coefficient (regulator Cv): 0.06



Model: FPR-1SUSS-15-50-10-B-10


Typical Flow Chart

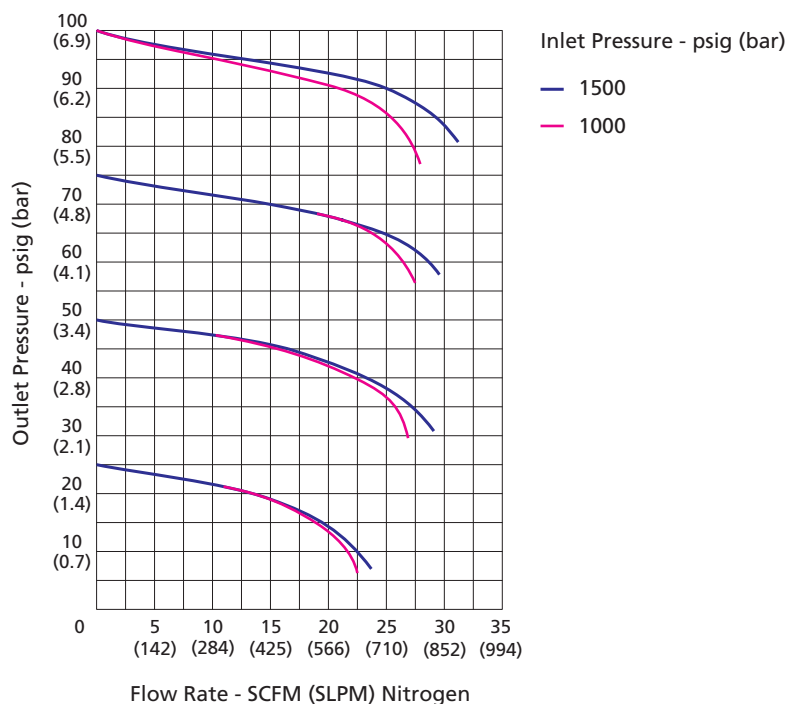


Dimensions

Dimensions, in inches (millimeters), are for reference only.


Single-outlet

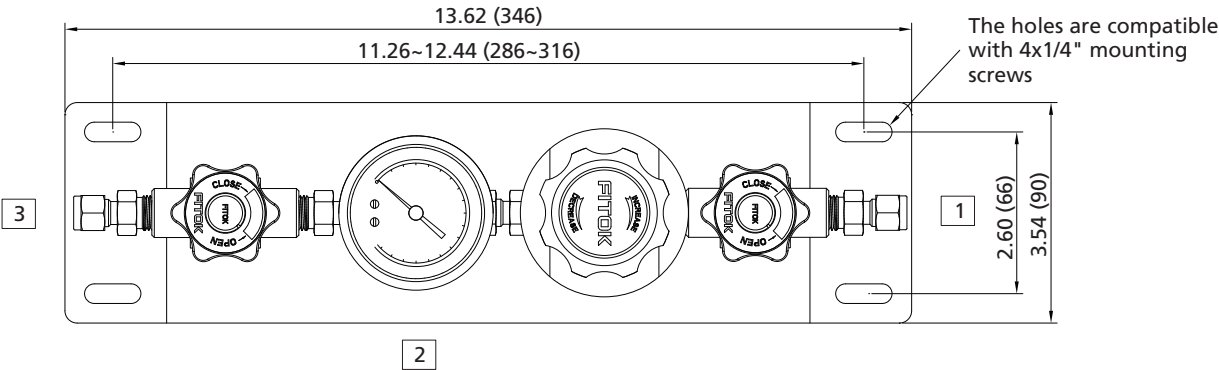


Dual-outlet

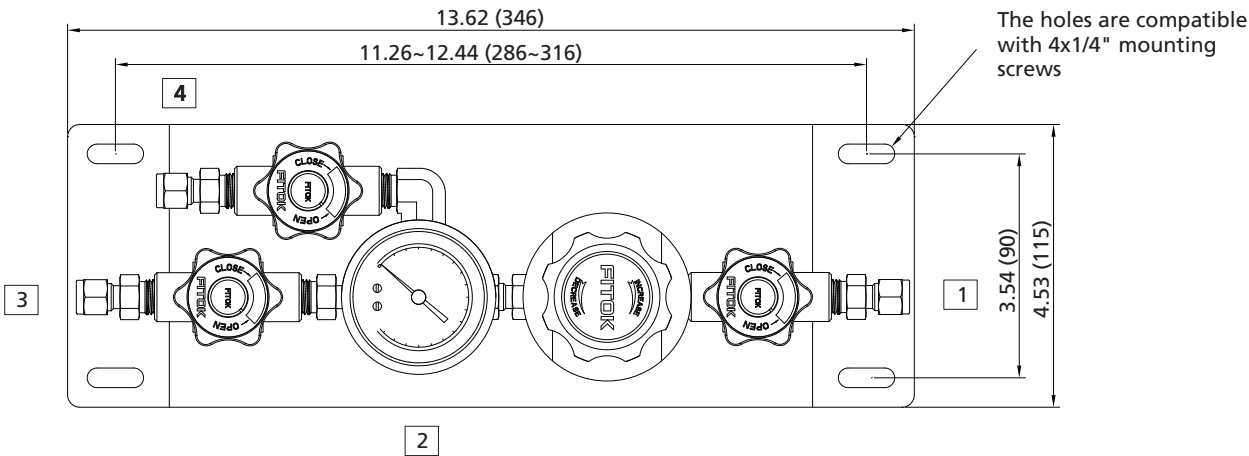

Triple-outlet

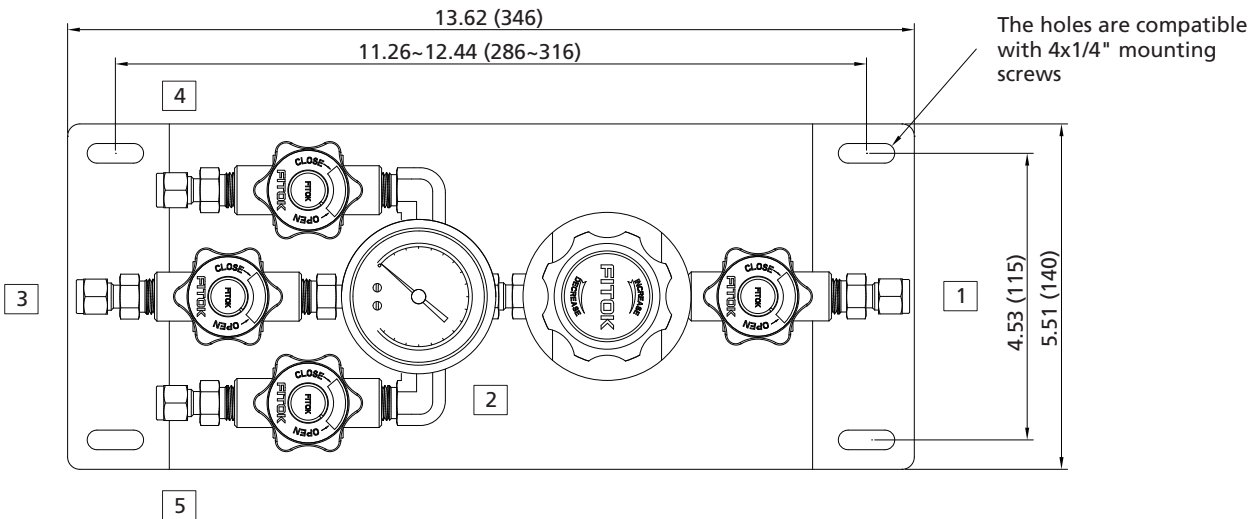

Components Introduction

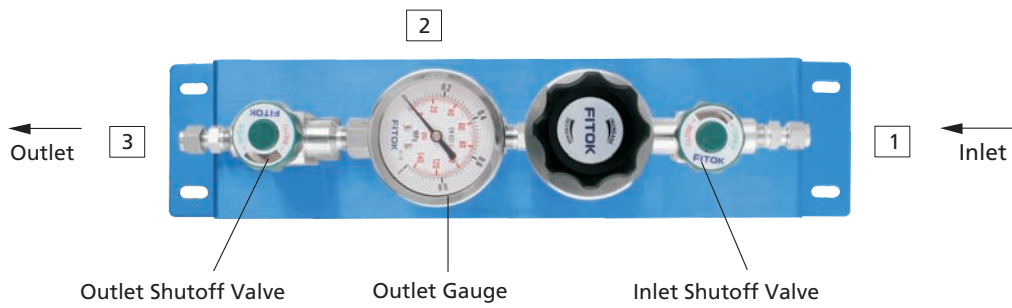

Part Number Description

FPR - 1SC 6L - 15 - 100 - 10 - M - 10 - 00 - 00

Outlet Option	
U	Single-outlet
T	Dual-outlet
C	Triple-outlet

Body Material (Regulator)	
6L	316L SS
SS	316 SS
B	Brass

Inlet Pressure P1	
15	1500 psig
Outlet Pressure Range P2	
25	0~25 psig
50	0~50 psig
100	0~100 psig
150	0~150 psig
200	0~200 psig

Connection 1	
00	1/4" Female NPT
01	1/4" Male NPT
10	1/4" Tube Fitting
11	3/8" Tube Fitting
20	6 mm Tube Fitting
21	8 mm Tube Fitting
Other connections are available upon request	

Connection 2	
B	With Gauge (psi/bar)
M	With Gauge (MPa)
P	Plug
00	1/4" Female NPT

Connection 3	
00	1/4" Female NPT
01	1/4" Male NPT
10	1/4" Tube Fitting
11	3/8" Tube Fitting
20	6 mm Tube Fitting
21	8 mm Tube Fitting
Other connections are available upon request	

Connection 4	
Same as Connection 1	

Connection 5	
Same as Connection 1	

Examples of part number:
a. 2-port type (1 in, 1 out): FPR-1SU6L-15-25-00-B-20
b. 3-port type (1 in, 2 out): FPR-1STB-15-200-10-M-10-10

Back Pressure Regulators

BPR-1 Series Back Pressure Diaphragm Regulators

Features

- ⦿ Metal-to-metal seal with convoluted diaphragm
- ⦿ Close pressure differential between crack and reseal
- ⦿ Panel mounting available


Technical Data

- ⦿ Maximum control pressure: 250 psig
- ⦿ Pressure control range: 0~25, 0~50, 0~100 or 0~250 psig
- ⦿ Material of the main components:
Seat: PCTFE
Diaphragm: Hastelloy
- ⦿ Temperature: -40°F~+140°F (-40°C~+60°C)
- ⦿ Leak rates:
Internal: Bubble-tight
External: $\leq 1 \times 10^{-9}$ mbar · l/s helium
- ⦿ Flow coefficient (Cv): 0.3
- ⦿ Weight: ≈ 1.98 lbs (0.9 kg)
- ⦿ Body ports: 1/4" female NPT for inlet, outlet and gauge




Model: BPR-16L-250-00-00-Z

Typical Flow Chart


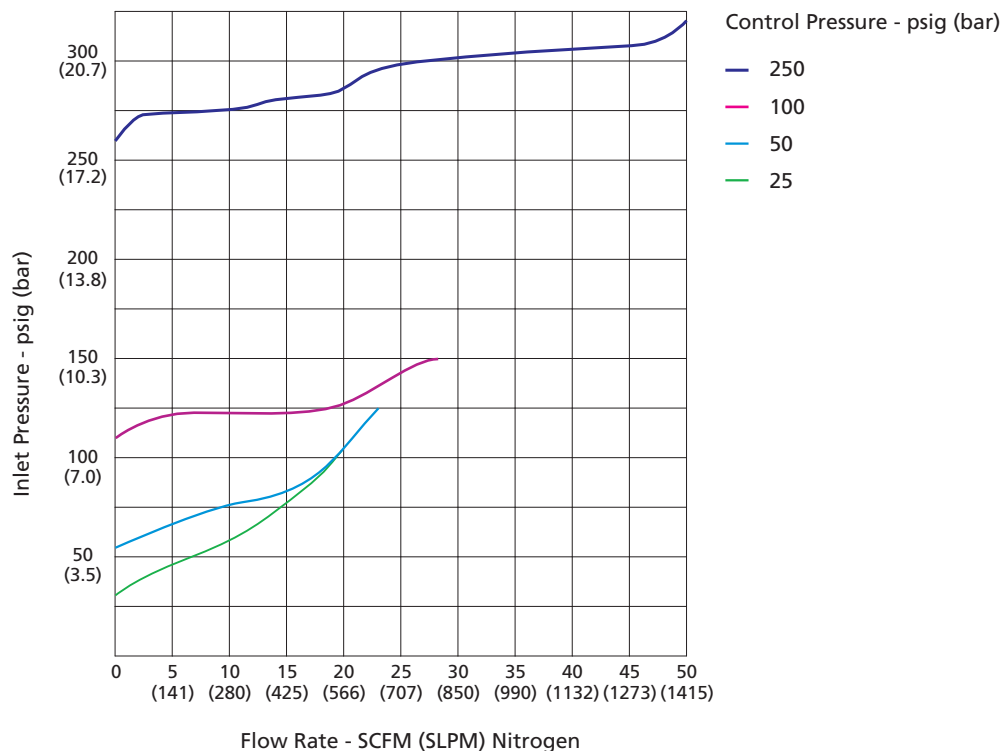


Dimensions

Dimensions, in inches (millimeters), are for reference only.

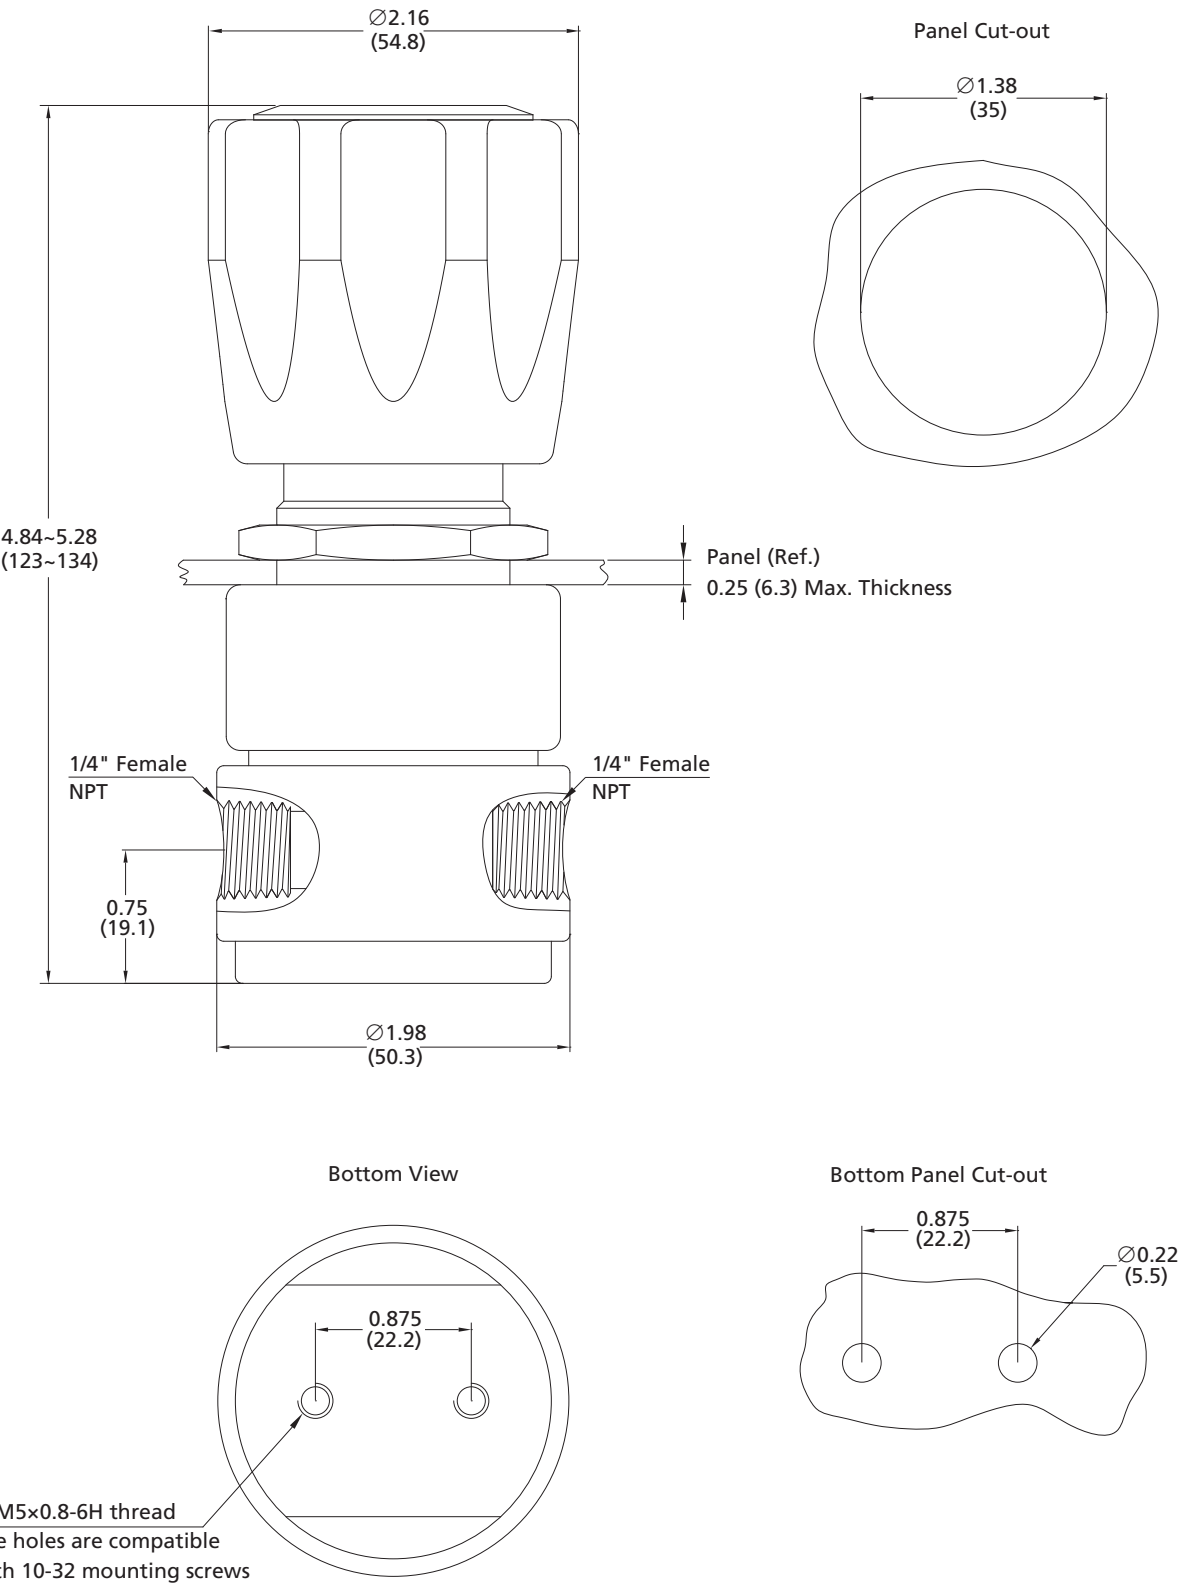


Port Configurations

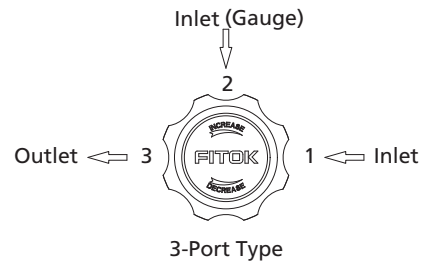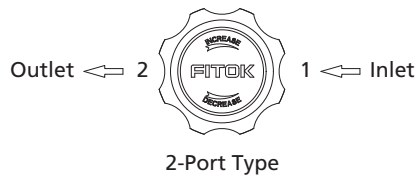

Typical Application

When the system pressure is lower than the set pressure, the diaphragm obstructs the flow by the force of spring. When the system pressure is higher than the set pressure, the diaphragm compresses the inner spring to connect the flow so as to allow the fluid to pass through the back pressure regulator to keep the pressure of the Storage Vessel stable.

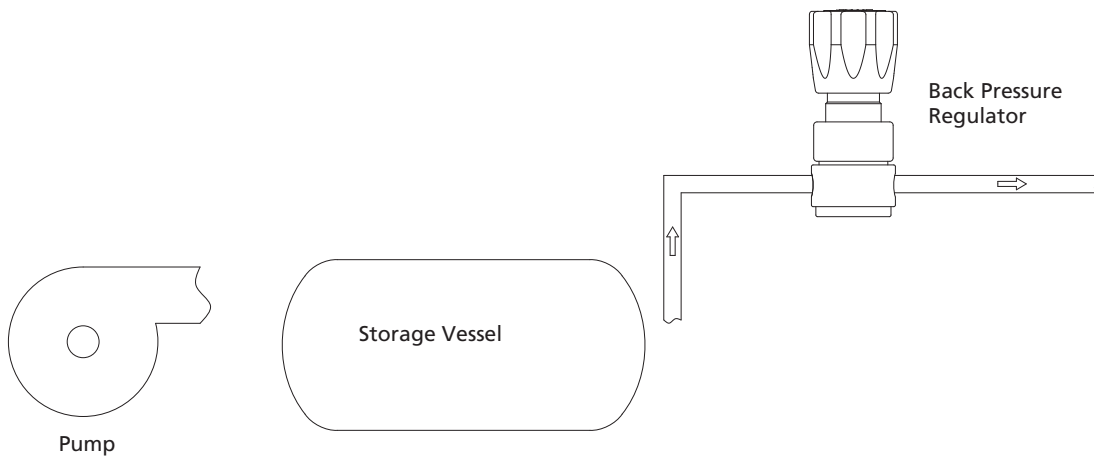

Part Number Description

BPR - 16L - 100 - 10 - M - 11 - Z

Body Material	Control Pressure Range P	Connection 1	Connection 2	Connection 3	Installation Type
6L 316L SS	25 0~25 psig	00 1/4" Female NPT	B With Gauge (psi/bar)	Same as Connection 1	Not Required
SS 316 SS	50 0~50 psig	01 1/4" Male NPT	M With Gauge (MPa)		Z Installed with One Panel Nut
B Brass (Nickel-plated)	100 0~100 psig	10 1/4" Tube Fitting	P Plug		N Installed with Screws at the Bottom
	250 0~250 psig	11 3/8" Tube Fitting	00 1/4" Female NPT		
		20 6 mm Tube Fitting	01 1/4" Male NPT		
		21 8 mm Tube Fitting	10 1/4" Tube Fitting		
		Other connections are available upon request	Other connections are available upon request		

Examples of part number:
a. 2-port type (1 in, 1 out): BPR-16L-25-00-00

FITOK

Back Pressure Regulators

BPR-2 Series Back Pressure Piston Regulators

Features

- ⦿ Durable piston-sensed design
- ⦿ Bubble-tight shutoff at all reseating pressure
- ⦿ Low operating torque
- ⦿ Panel mounting available
- ⦿ With special cleaning and packaging, applicable to oxygen-enriched environments


Technical Data

- ⦿ Maximum control pressure: 1000 psig
- ⦿ Pressure control range: 10~300, 10~500 or 10~1000 psig
- ⦿ Material of the main components:
Seat: PCTFE
Piston: 316L
O-rings: Viton or Kalrez
- ⦿ Temperature: -15°F~+165°F (-26°C~+74°C)
- ⦿ Leak rates:
Internal: Bubble-tight
External: Bubble-tight
- ⦿ Flow coefficient (Cv): 0.3
- ⦿ Weight: ≈1.98 lbs (0.9 kg)
- ⦿ Body ports: 1/4" female NPT for inlet, outlet and gauge




Model: BPR-26LZ-300-00-00-Z

Typical Flow Chart

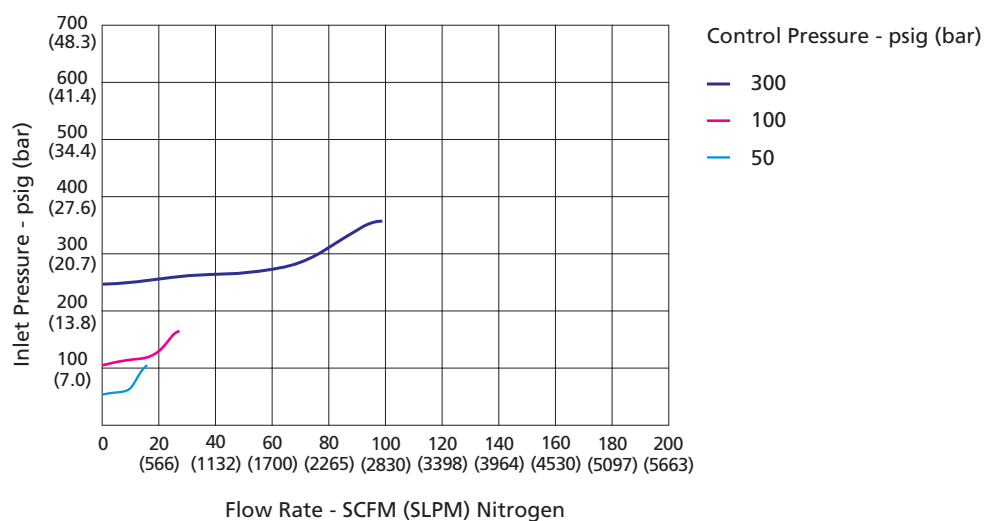


Dimensions

Dimensions, in inches (millimeters), are for reference only.

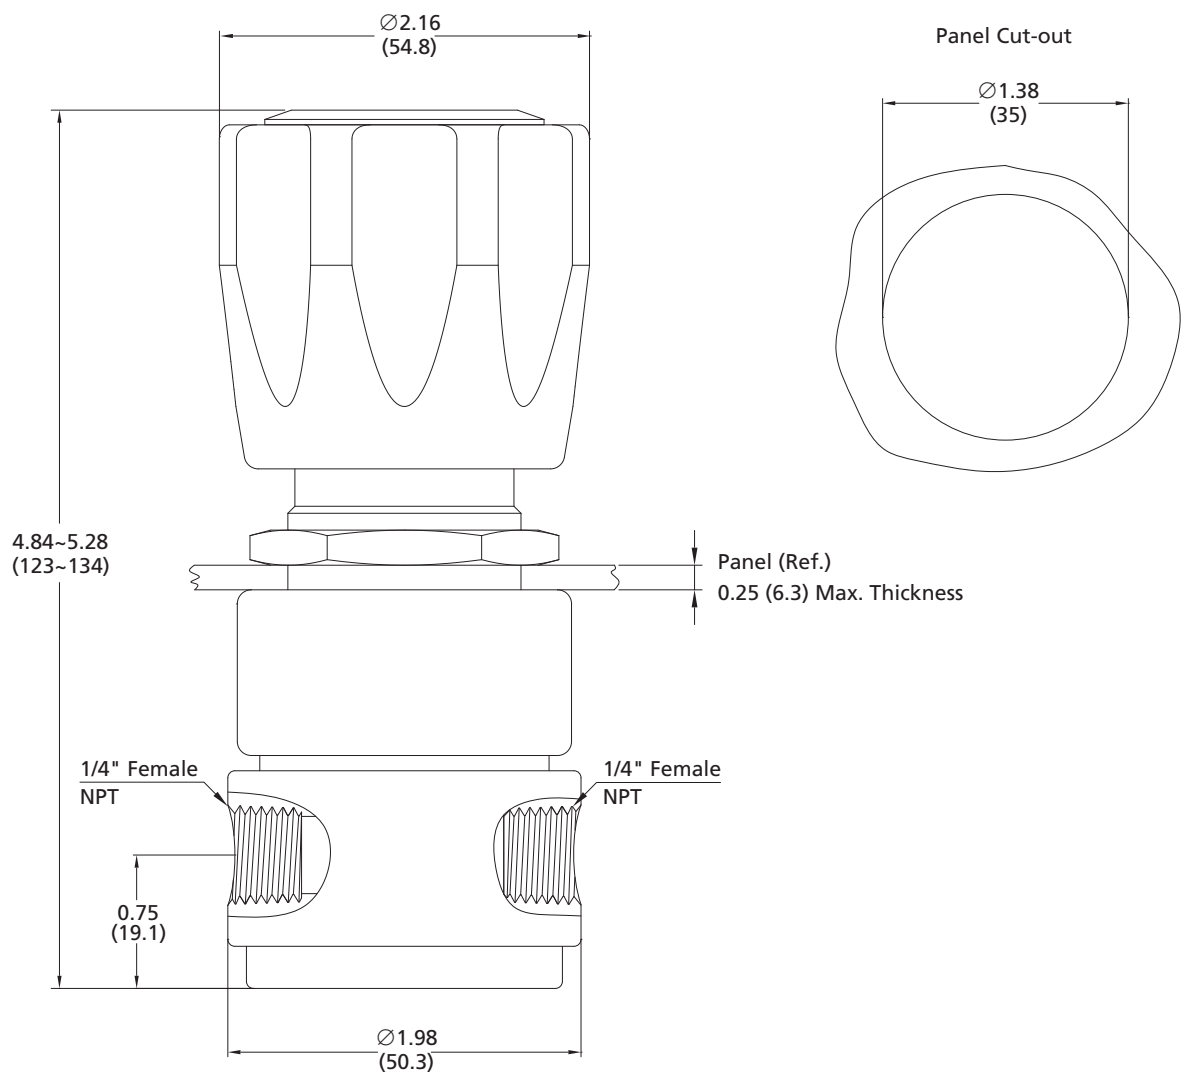


Bottom View

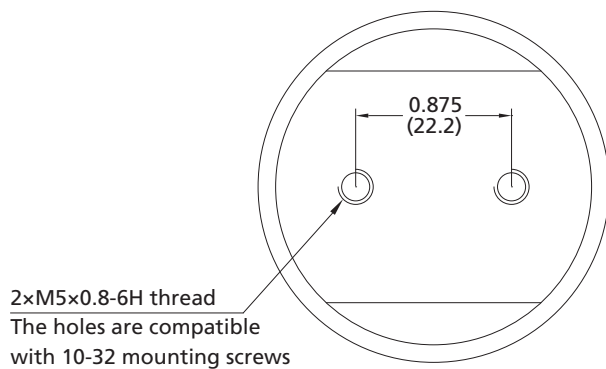

2×M5×0.8-6H thread
The holes are compatible
with 10-32 mounting screws


Bottom Panel Cut-out

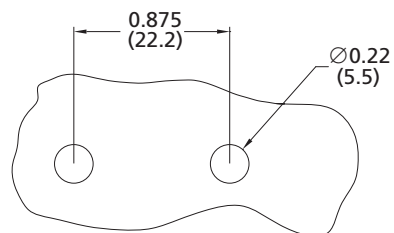

Port Configurations



2-Port Type

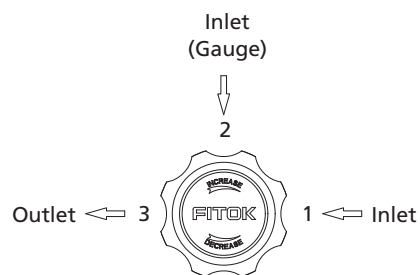


3-Port Type



Typical Application

BPR-2 Series Back Pressure Regulators maintain the required pipeline pressure to ensure the Pump to output fluid stably when system pressure fluctuates.

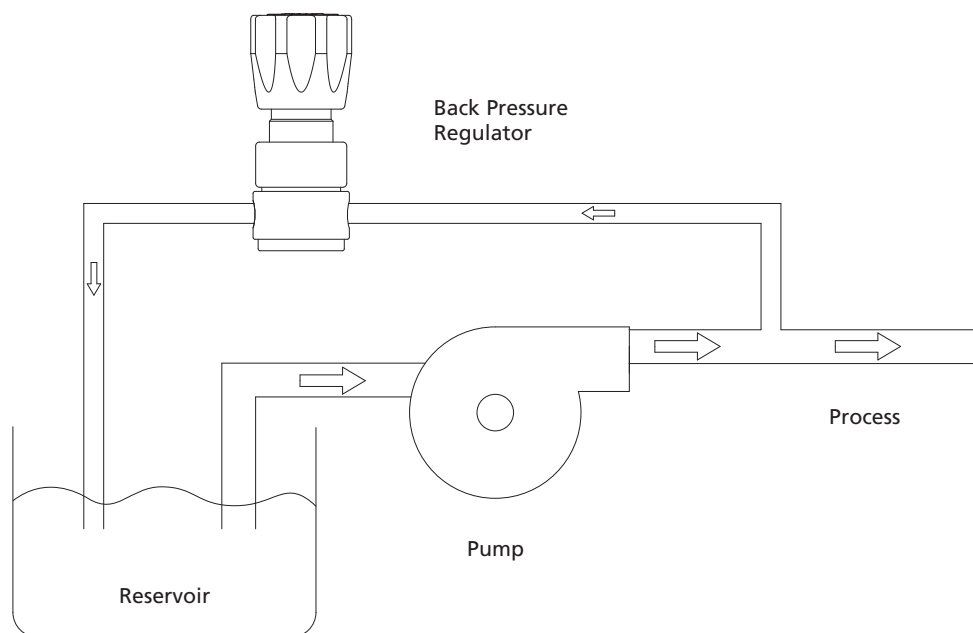

Part Number Description

Body Material		Control Pressure Range P		Connection 1		Connection 2		Connection 3	Installation Type	
6L	316L SS	300	10~300 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	Same as Connection 1		Not Required
SS	316 SS	500	10~500 psig	01	1/4" Male NPT	M	With Gauge (MPa)		Z	Installed with One Panel Nut
B	Brass (Nickel-plated)	1000	10~1000 psig	10	1/4" Tube Fitting	P	Plug		N	Installed with Screws at the Bottom
				11	3/8" Tube Fitting	00	1/4" Female NPT			
				20	6 mm Tube Fitting	01	1/4" Male NPT			
				21	8 mm Tube Fitting	10	1/4" Tube Fitting			
				Other connections are available upon request		Other connections are available upon request				

Examples of part number:

a. 2-port type (1 in, 1 out): BPR-2SS-500-00-00

Back Pressure Regulators

BPR-3 Series Back Pressure Piston Regulators

Features

- Control of back-pressure up to 10000 psig for gas or liquid application
- Safe and reliable piston sensing
- 7 pressure control ranges
- Panel mounting available
- Special cleaning and packaging available for application in oxygen-enriched environments


Technical Data

- Maximum control pressure:
Stainless steel: 10000 psig
Brass: 6000 psig
- Pressure control ranges: 5~500, 5~800, 10~1500, 15~2500, 25~4000, 50~6000, 200~10000 psig
- Material of the main components:
Body: 316 SS or brass
Seat: PEEK
Piston: 316L
O-rings: Viton or Kalrez
- Temperature: -15°F~+165°F (-26°C~+74°C)
- Leak rates:
Internal: Bubble-tight
External: Bubble-tight
- Flow coefficient (Cv): 0.25
- Weight(regulator): ≈5.7 lbs (2.6 Kg)
- Body ports: 1/4" female NPT for inlet, outlet, and gauge




Model: BPR-355-40-00-00-Z

Typical Flow Chart


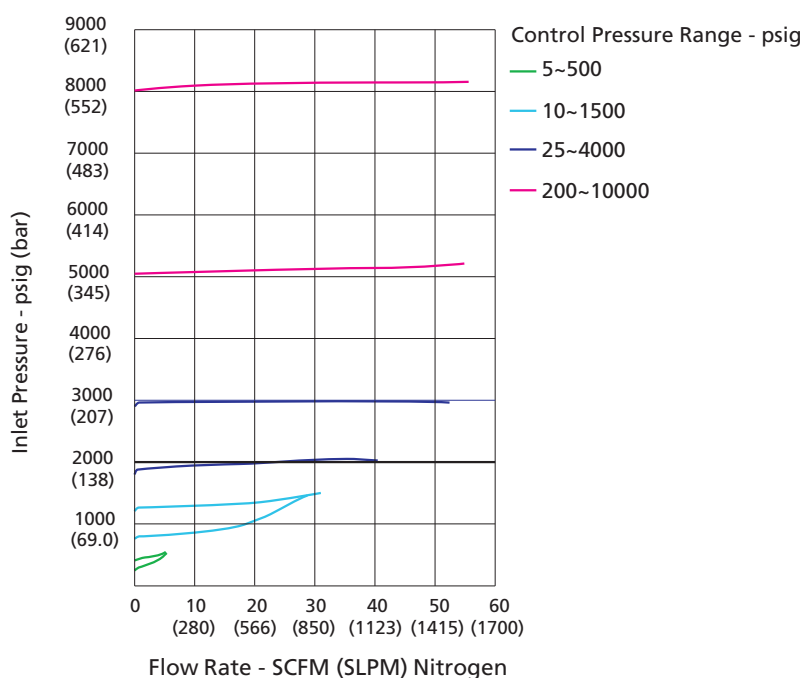


Dimensions


Dimensions, in inches (millimeters), are for reference only.

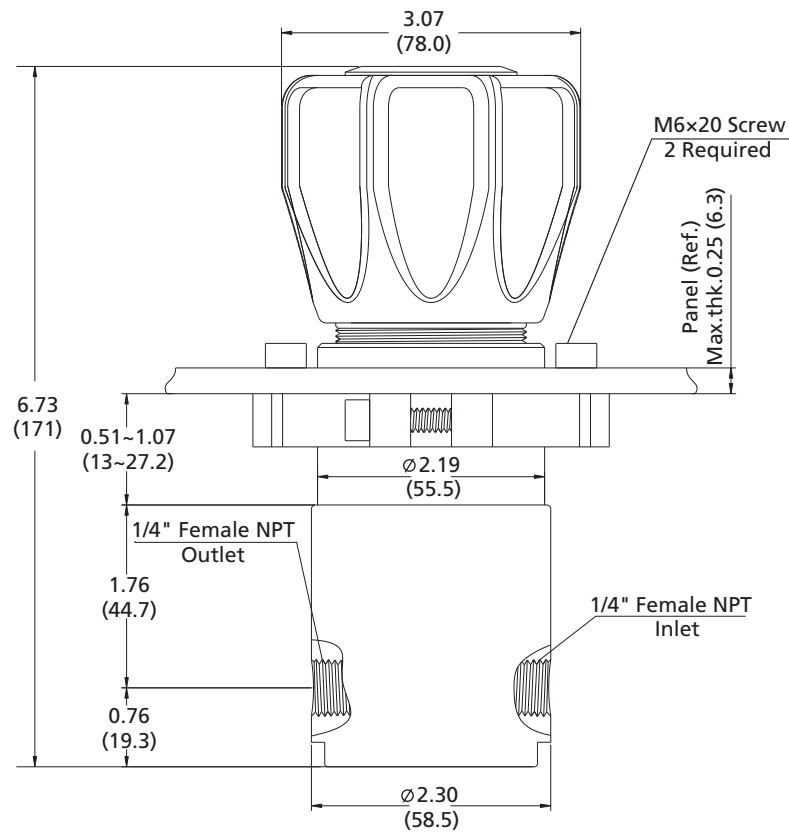

Bottom View

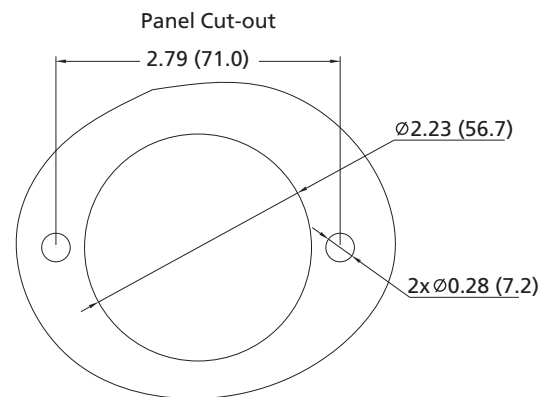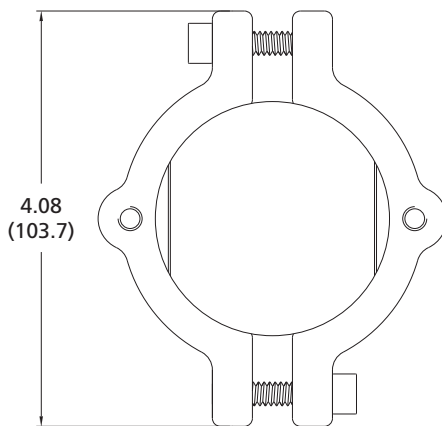

Port Configurations

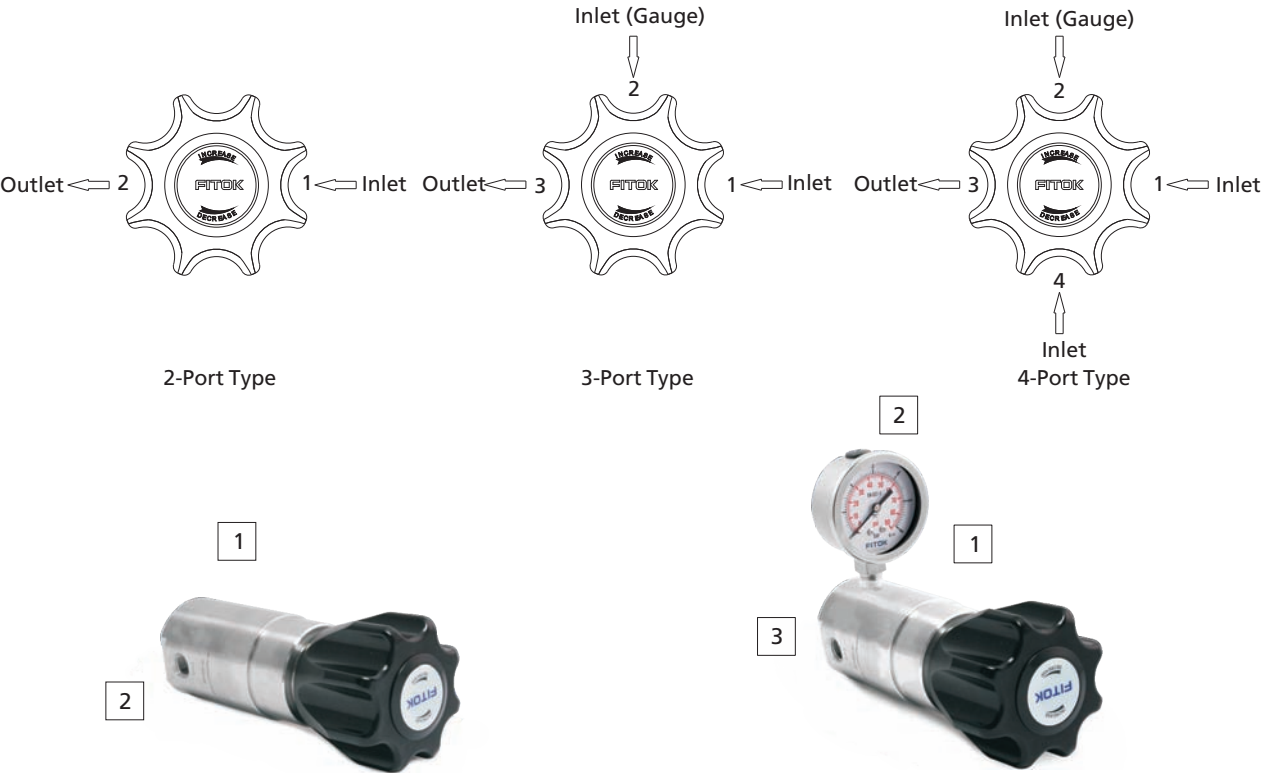

Part Number Description

BPR-3B		Z	-	15	-	00	-	B	-	00	-	00	-	Z	-	F2
Body Material		Pressure Control Range P		Connection 1		Connection 2		Connection 3		Connection 4		Panel Mount		Product Technology Grade		
SS	316 SS	5	5~500 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	Same as Connection 1		Same as Connection 1			Without	<div>General Purpose</div> <div>F2 Special Cleaning and Packaging</div>		
6L	316L SS	8	5~800 psig	01	1/4" Male NPT	M	With Gauge (MPa)					z	With			
B	Brass (Max. Control Pressure 6000 psig)	15	10~1500 psig	10	1/4" Tube Fitting	P	Plug									
		25	15~2500 psig	11	3/8" Tube Fitting	00	1/4" Female NPT									
		40	25~4000 psig	20	6 mm Tube Fitting	01	1/4" Male NPT									
		60	50~6000 psig	10	1/4" Tube Fitting	11	3/8" Tube Fitting									
O-ring Material		100	200~10000 psig	21	8 mm Tube Fitting	20	6 mm Tube Fitting									
	Viton			Other connections are available upon request		11	3/8" Tube Fitting									
Z	Kalrez					20	6 mm Tube Fitting									
						21	8 mm Tube Fitting									
						Other connections are available upon request										

B

Related Products

Purge Assemblies	B-02
Diaphragm Valves	B-04
Ball Valves	B-05
Needle Valves	B-06
Check Valves	B-07
Relief Valves	B-08
Filters	B-09
Fittings	B-10
Metal Flexible Hoses	B-13
Cylinder Connections	B-14

Purge Assemblies


FPV-1 Series

Technical Data

- ⦿ Maximum working pressure: 4500 psig
- ⦿ Material of the main components:
Seat: PCTFE (diaphragm valve)
Diaphragm: Elgiloy (diaphragm valve)
- ⦿ Temperature: -10°F~+150°F (-23°C~+65°C)
- ⦿ Leak rates:
Internal: $\leq 1 \times 10^{-9}$ mbar·l/s helium
External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- ⦿ Minimum orifice: $\Phi 0.13"$ (3.2 mm)

Product Types


- ⦿ **Straight Purge Assemblies**
Connecting the Inlet (auxiliary) port of the regulator or in between the regulator and the cylinder to allow the corrosive or toxic gas to be vented through to a safe location.

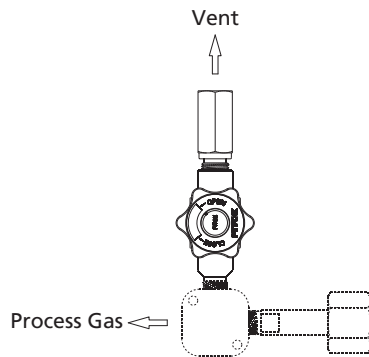


Port Encoding Example: FPV - 156L - 01 - 00



- ⦿ **Tee Purge Assemblies**
Connecting the cylinder with the regulator, allowing process gas flowing through to purge out the remaining contamination in between the cylinder and the regulator to prevent the high purity gas system from atmospheric contamination.

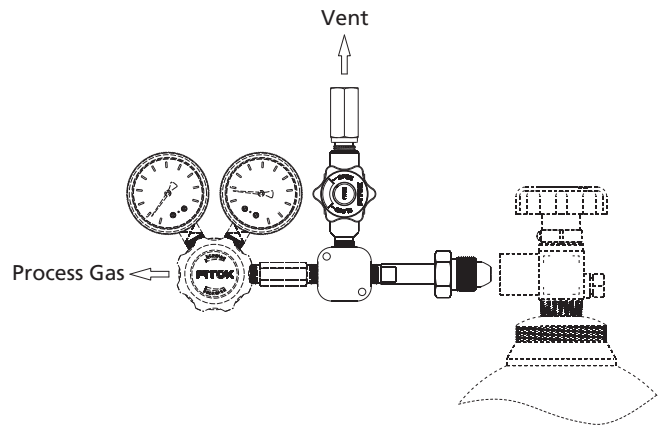



Port Encoding Example: FPV - 1T6L - C580 - 00 - 00

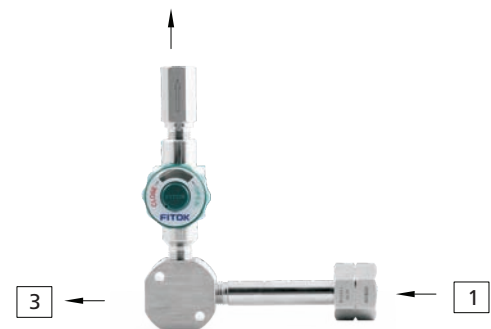

Cross Purge Assemblies

Connecting the cylinder and the regulator with an additional shutoff diaphragm valve to the Tee Purge Assemblies to utilize inert gas from the outside to purge out the contamination in between the cylinder and the regulator.

Port Encoding Example: FPV - 1C6L - DIN6 - 00 - 00 - 00

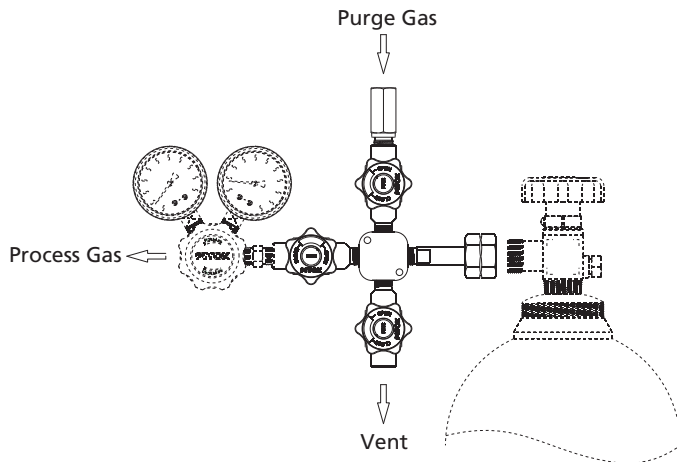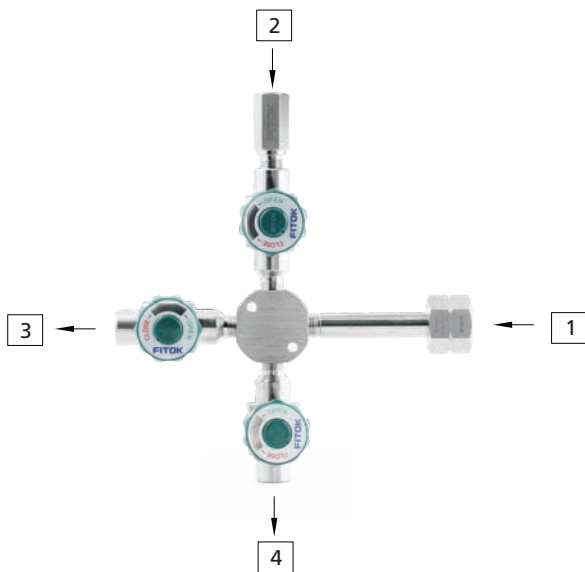

Part Number Description

FPV - 1C 6L - DIN1 - 00 - 00 - 00

Product Types		Body Material		Connection 1		Connection 2		Connection 3	Connection 4
S	Straight Purge Assemblies	6L	316L SS	00	1/4" Female NPT	00	1/4" Female NPT	Same as Connection 2	Same as Connection 2
T	Tee Purge Assemblies	SS	316 SS	01	1/4" Male NPT	01	1/4" Male NPT		
C	Cross Purge Assemblies			C_ _ _	CGA Number (USA)	10	1/4" Tube Fitting		
				DIN_ _	DIN Number (Germany)	20	6 mm Tube Fitting		
					Refer to page B-28 for cylinder connections, according to the specific gas type. Cylinder connections compliant to other standards are available upon request. Please contact FITOK for details.	21	8 mm Tube Fitting		
							Other connections are available upon request		

Diaphragm Valves


DS Series

Features

- Reduced inner capacity
- Packless diaphragm seal design for high purity
- Minimized number of components
- Manual and pneumatic actuators available
- Aluminum piston to increase operation speed

Technical Data

- Maximum working pressure: 4500 psig
- Material of the internal components:
 - Seat: PCTFE or Vespel
 - Diaphragm: Elgiloy
- Temperature:
 - PCTFE: -10°F~+150°F (-23°C~+65°C)
 - Vespel: -10°F~+250°F (-23°C~+121°C)
- Leak rates:
 - Internal: $\leq 1 \times 10^{-9}$ mbar·l/s helium
 - External: $\leq 1 \times 10^{-9}$ mbar·l/s helium
- Flow coefficient (Cv): 0.17

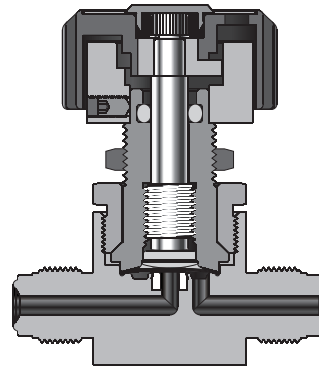

Part Number Description

DS	6L	-	NS	4	-	FNS	4	-	R	V	F2
Body Material		Inlet Type		Inlet Size		Outlet Size		Actuator Type		Technology Grade	
6LW	316L VIM-VAR	TB	Fractional Tube Butt Weld	4	1/4"	Same as Inlet		R	Handle	General Purpose	
6L	316L SS	MTB	Metric Tube Butt Weld	6	6 mm or 3/8"	Specify in the same way as inlet size		C	Pneumatic Normally Closed	F2	Special Cleaning and Packaging
SS	316 SS	FR	Male FR Fitting	8	8 mm			O	Pneumatic Normally Open	F3	Ultra High Purity
				Outlet Type						Seat	
		FFR	Female FR Fitting	Same as Inlet						PCTFE	
		FL	Fractional Tube Fitting	Specify in the same way as inlet type						V	
		ML	Metric Tube Fitting								
		NS	Male NPT								
		FNS	Female NPT								

Ball Valves

BO Series


Features

- ② One-piece body and one-piece ball stem
- ② No dead zone, such as in the area between the ball and valve chamber
- ② In-line inspection and repair with top entry design
- ② Thermal cycle performance improved and wear compensated by live-loaded design
- ② Multiple connections available
- ② Pneumatic and electric actuators available



Technical Data

- Maximum working pressure: 3000 psig (207 bar)
- Temperature: -65°F to 300°F (-54°C to 148°C)
- Seat material: PTFE

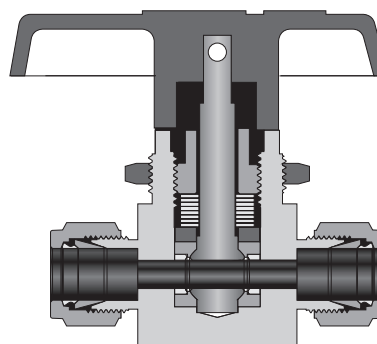

Part Number Description

Body Material

6L	316L SS
SS	316 SS
B	Brass

Connection 1 Type

FNS	Female NPT
NS	Male NPT
FR	Male FR Fitting
FL	Fractional Tube Fitting
ML	Metric Tube Fitting

Connection 1 Size

4	1/4"
6	6 mm or 3/8"
8	8 mm or 1/2"

Connection 2 Type

Same as Connection 1
Specify in the same way as inlet type

Connection 2 Size

Same as Connection 1
Specify in the same way as inlet size

Orifice Size

02	0.09" (2.4 mm)
03	0.13" (3.2 mm)
05	0.19" (4.8 mm)

Seat Material

	PTFE
H	UHMWPE
A	PFA

Flow Pattern

	Straight
A	Angle

Handle

	Black Nylon
C	Red Nylon
F	Green Nylon
J	Blue Nylon
U	Black Aluminium

Technology Grade

	General Purpose
F2	Special Cleaning and Packaging

Needle Valves

ND Series

Features

- One-piece forged body
- Straight and angle patterns
- Compact design
- Non-rotating stem
- Specially designed handle to stop contamination from entering into the valve



Technical Data

- Maximum working pressure: 3000 psig (207 bar)
- Temperature:
 - PCTFE stem tip: -20°F to 200°F (-28°C to 93°C)
 - PEEK stem tip: -20°F to 450°F (-28°C to 232°C)

Part Number Description

ND	SS	-	FNS	4	-	NS	4	-	7	P	E	-	A	F2
Body Material		Inlet Type		Outlet Type		Tip Material		Flow Pattern		Technology Grade				
6L	316L SS	FNS	Female NPT	Same as Inlet Type		PCTFE		Straight		General Purpose				
SS	316 SS	NS	Male NPT	Specify in the same way as inlet type		P PEEK		A Angle		F2 Special Cleaning and Packaging				
B	Brass	FL	Fractional Tube Fitting	Outlet Size		Orifice Size		O-ring Material						
		ML	Metric Tube Fitting			5 0.08" (2.0 mm) 7 0.16" (4.0 mm) 8 0.22" (5.6 mm)		FKM B Buna-N E Ethylene Propylene						
		Inlet Size		Same as Inlet Size										
		4	1/4"	Specify in the same way as inlet size										
		6	6 mm or 3/8"											
		8	8 mm or 1/2"											

Check Valves

CV, CO and COA Series


Features

- Resilient O-ring seat design for leak-free sealing
- Maximum working pressure: 3000 psig (207 bar)
- Temperature: -10°F to 375°F (-23°C to 190°C)
- PTFE-coated spring available




CV Series

- Fixed cracking pressure: 1/3 to 25 psig (0.02 to 1.7 bar)

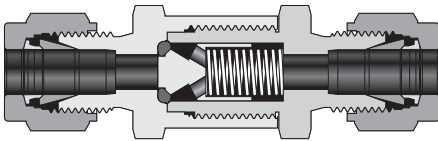


CO Series

- Compact design with one-piece body
- Fixed cracking pressure: 1/3 to 25 psig (0.02 to 1.7 bar)



COA Series

- Adjustable cracking pressure: 3 to 600 psig (0.02 to 41.4 bar)
- A variety of springs available

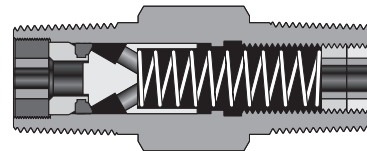

Part Number Description

CV	SS	-	FNS	4	-	NS	4	-	B	-	A	F2
Series	Inlet Type		Inlet Size		Outlet Size		Cracking Pressure		Technology Grade			
CV	FNS	Female NPT	4	1/4"	Same as Inlet Size		3 psig	CV and CO	General Purpose			
CO	NS	Male NPT	6	6 mm or 3/8"	Specify in the same way as inlet size		1 1/3 psig		F2 Special Cleaning and Packaging			
COA	FL	Fractional Tube Fitting (only for CV Series)	8	8 mm or 1/2"			2 1 psig					
	ML	Metric Tube Fitting (only for CV Series)	Outlet Type				3 10 psig					
Body Material		ML		Same as Inlet Type		Seal Material		4 25 psig	COA			
6L	316L SS			Specify in the same way as inlet type		FKM	5 3 to 50 psig					
SS	316 SS					B Buna-N	6 50 to 150 psig					
B	Brass					N Neoprene	7 150 to 350 psig					
						E Ethylene Propylene	350 to 600 psig					
						Z Kalrez						

Relief Valves


RUV and RV Series

Introduction

Relief valve opens when system pressure exceeds the set pressure, allowing the medium to flow out to relieve the system pressure and closes when the system pressure decreases to the resealing pressure.


RUV Series

- Compact design with one-piece body
- Standard seat: FKM
- Temperature: -10°F to 300°F (-23°C to 148°C)
- Cracking pressure: 25 to 500 psig (1.7 to 34.5 bar)
- Set pressure by nut adjustment and spring replacement

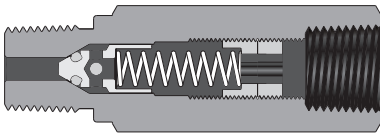

RV Series

- Working temperature: -10°F to 300°F (-23°C to 148°C)
- Cracking pressure: 50 to 6000 psig
- Adjustable bonnet cap for pressure setting
- Lead-seal line protected

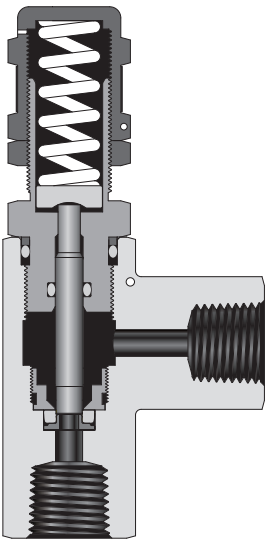

Temperature Range of Sealing Material

O-ring Material	Temperature Range °F (°C)
Fluorocarbon Rubber	25 to 250 (-4 to 121)
Buna-N Rubber	0 to 250 (-17 to 121)
Neoprene Rubber	-10 to 300 (-23 to 148)
Ethylene Propylene Rubber	30 to 250 (-1 to 121)

Part Number Description


RV		SS	-		FNS	4	-		NS	4	-		6	B	-		1	F2			
Series				Inlet Type				Outlet Type				Orifice Size				Set Pressure		Technology Grade			
RUV				FNS	Female NPT			Same as Inlet Type				0.14" (3.6 mm) (only for RUV Series)				0	10 to 25 psig	RUV		General Purpose	
RV				NS	Male NPT			Specify in the same way as inlet type				0.14" (3.6 mm) (only for RV Series)				1	25 to 100 psig		RV	F2	Special Cleaning and Packaging
				FL	Fractional Tube Fitting (only for RV Series)											2	100 to 250 psig				
				ML	Metric Tube Fitting (only for RV Series)											3	250 to 500 psig				
																F	50 to 300 psig				
Body Material								Outlet Size				Seal Material				O	300 to 700 psig	RV			
6L	316L SS							Same as Inlet Size				FKM				Y	700 to 1500 psig				
SS	316 SS							Specify in the same way as inlet size				B		Buna-N			P		1500 to 2500 psig		
												N		Neoprene			W		2500 to 3500 psig		
												E		Ethylene Propylene			J		3500 to 4500 psig		
												Z		Kalrez			C	4500 to 6000 psig			

Filters

FT Series

Tee-type Filters


- Maximum working pressure: 6000 psig (414 bar)
- Temperature: -20 °F to 900 °F (-28°C to 482 °C)
- Filter element replaceable without removing body from system



FB Series

Bypass Filters


- Maximum working pressure: 6000 psig (414 bar)
- Temperature: -20 °F to 900 °F (-28°C to 482 °C)
- Bypass port at filter bottom for easy sampling and purging



FI Series

In-line Filters


- Maximum working pressure: 3000 psig (207 bar)
- Temperature: -20 °F to 900 °F (-28°C to 482 °C)
- Compact and space-saving design

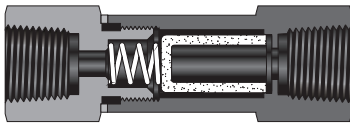

FW Series

All-welded In-line Filters

- Maximum working pressure: 6000 psig (414 bar)
- Temperature: -20 °F to 900 °F (-28°C to 482 °C)
- Large filtration area and high flow coefficient
- All-welded construction to eliminate leakage

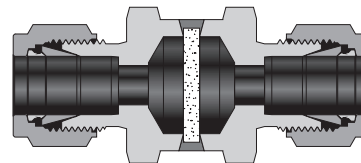

Part Number Description


FB		SS		-		FL		4		-		NS		4		-		S		P		2		-		FL 4		F2	
Series						Inlet Type				Outlet Type				Element Type		Pore Size (µm)		Gasket Material				Bypass Port (for FB Series only)				Technology Grade			
FT				FNS		Female NPT				Same as Inlet Type				Sintered		05						1/8" Female NPT				General Purpose			
FB				NS		Male NPT				Specify in the same way as inlet type				S		2						FL 4		1/4" Fractional Tube Fitting				Special Cleaning and Packaging	
FI				FL		Fractional Tube Fitting										7						TS 4		1/4" Tube Socket Weld					
FW				ML		Metric Tube Fitting										15						FL 6		3/8" Fractional Tube Fitting					
				FR		Male FR Fitting				Outlet Size				Silver-plated 316 SS for FT, FB, FI Series		40													
										Same as Inlet Size				PTFE-plated 316 SS for FT, FB, FI Series		60													
										Specify in the same way as inlet size				A		80													
														W		100													
														Non-plated 316 SS for FT, FB, FI Series		150													
																250													
																400													

Fittings



Features


- Sizes ranging from 1/4" to 1/2" and 6 mm to 12 mm
- Diverse material and configurations available
- Precision machined components to ensure perfect deformation of the ferrules and tubing
- Hardened threads with smooth surface finish to avoid galling and to help extend the fitting cycle life
- Silver-plated female nut threads to reduce friction against the body threads
- Radius junction design with elbows to provide smooth flow path
- Every fitting marked with size, material and heat number

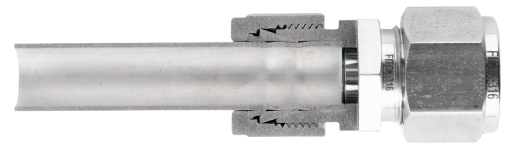

Ordering Information and Dimensions

Dimensions are shown with FITOK nuts finger-tight.


Male Connectors



Fractional Tube			NPT Thread						
T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, in. (mm)						
			L	B	C	E	G	F	
1/4	1/4	-CM-FL4-NS4	1.49(37.8)	0.56(14.2)	0.60(15.2)	0.19(4.8)	0.56(14.3)	0.56(14.3)	
3/8	3/8	-CM-FL6-NS6	1.57(39.9)	0.56(14.2)	0.66(16.8)	0.28(7.1)	0.69(17.5)	0.69(17.5)	
1/2	1/2	-CM-FL8-NS8	1.93(49.0)	0.75(19.1)	0.90(22.9)	0.41(10.4)	0.87(22.2)	0.87(22.2)	

Metric Tube			NPT Thread						
T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm (in.)						
			L	B	C	E	G	F	
6	1/4	-CM-ML6-NS4	37.9(1.49)	14.2(0.56)	15.3(0.60)	4.8(0.19)	14.0(0.55)	14.0(0.55)	
8	3/8	-CM-ML8-NS6	39.3(1.55)	14.2(0.56)	16.2(0.64)	6.4(0.25)	16.0(0.63)	18.0(0.71)	
10	3/8	-CM-ML10-NS6	40.9(1.61)	14.2(0.56)	17.2(0.68)	7.9(0.31)	19.0(0.75)	18.0(0.71)	
12	1/2	-CM-ML12-NS8	49.0(1.93)	19.1(0.75)	22.8(0.90)	9.5(0.37)	22.0(0.87)	22.0(0.87)	


Unions



Fractional Tube			Dimension, in. (mm)				
T-Tube O.D. (in.)	Basic Ordering Number		Dimension, in. (mm)				
			L	C	G	F	E
1/4	-U-FL4		1.61(40.9)	0.60(15.2)	0.56(14.3)	0.50(12.7)	0.19(4.8)
3/8	-U-FL6		1.77(45.0)	0.66(16.8)	0.69(17.5)	0.63(15.9)	0.28(7.1)
1/2	-U-FL8		2.02(51.3)	0.90(22.9)	0.87(22.2)	0.81(20.6)	0.41(10.4)


Metric Tube			Dimension, mm (in.)				
T-Tube O.D. (mm)	Basic Ordering Number		Dimension, mm (in.)				
			L	C	G	F	E
6	-U-ML6		41.0(1.61)	15.3(0.60)	14.0(0.55)	14.0(0.55)	4.8(0.19)
8	-U-ML8		43.2(1.70)	16.2(0.64)	16.0(0.63)	15.0(0.59)	6.4(0.25)
10	-U-ML10		46.2(1.82)	17.2(0.68)	19.0(0.75)	18.0(0.71)	7.9(0.31)
12	-U-ML12		51.2(2.02)	22.8(0.90)	22.0(0.87)	22.0(0.87)	9.5(0.37)

Conversion Unions



Metric Tube			Fractional Tube							
T-Tube O.D. (mm)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm (in.)							
			L	C	G	F	E	Cx	Gx	
6	1/4	-U-ML6-FL4	41.0(1.61)	15.3(0.60)	14.0(0.55)	14.0(0.55)	4.8(0.19)	15.2(0.60)	14.3(0.56)	
8	1/4	-U-ML8-FL4	42.3(1.67)	16.2(0.64)	16.0(0.63)	15.0(0.59)	4.8(0.19)	15.2(0.60)	14.3(0.56)	
8	3/8	-U-ML8-FL6	44.3(1.74)	16.2(0.64)	16.0(0.63)	16.0(0.63)	6.4(0.25)	16.8(0.66)	17.5(0.69)	
10	1/4	-U-ML10-FL4	44.5(1.75)	17.2(0.68)	19.0(0.75)	18.0(0.71)	4.8(0.19)	15.2(0.60)	14.3(0.56)	
10	3/8	-U-ML10-FL6	45.9(1.81)	17.2(0.68)	19.0(0.75)	18.0(0.71)	7.1(0.28)	16.8(0.66)	17.5(0.69)	
12	3/8	-U-ML12-FL6	48.4(1.91)	22.8(0.90)	22.0(0.87)	22.0(0.87)	7.1(0.28)	16.8(0.66)	17.5(0.69)	
12	1/2	-U-ML12-FL8	51.2(2.02)	22.8(0.90)	22.0(0.87)	22.0(0.87)	9.5(0.37)	22.9(0.90)	22.2(0.87)	


Reducing Unions



Fractional Tube									
T-Tube O.D. (in.)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, in. (mm)						
			L	C	G	F	E	Cx	Gx
3/8	1/4	-U-FL6-FL4	1.70(43.2)	0.66(16.8)	0.69(17.5)	0.63(15.9)	0.19(4.8)	0.60(15.2)	0.56(14.3)
1/2	1/4	-U-FL8-FL4	1.85(47.0)	0.90(22.8)	0.87(22.2)	0.81(20.6)	0.19(4.8)	0.60(15.2)	0.56(14.3)
1/2	3/8	-U-FL8-FL6	1.91(48.5)	0.90(22.8)	0.87(22.2)	0.81(20.6)	0.28(7.1)	0.66(16.8)	0.69(17.5)

Metric Tube									
T-Tube O.D. (mm)	Tx-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm (in.)						
			L	C	G	F	E	Cx	Gx
8	6	-U-ML8-ML6	42.3(1.67)	16.3(0.64)	16.0(0.63)	15.0(0.59)	4.8(0.19)	15.3(0.60)	14.0(0.55)
10	8	-U-ML10-ML8	45.1(1.78)	17.2(0.68)	19.0(0.75)	18.0(0.71)	6.4(0.25)	16.3(0.64)	16.0(0.63)
12	10	-U-ML12-ML10	48.7(1.92)	22.8(0.90)	22.0(0.87)	22.0(0.87)	7.9(0.31)	17.2(0.68)	19.0(0.75)

Male Elbows



Fractional Tube			NPT Thread						
T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, in. (mm)						
			L	C	G	F	E	B	Lx
1/4	1/4	-LM-FL4-NS4	1.06(26.9)	0.60(15.2)	0.56(14.3)	0.50(12.7)	0.19(4.8)	0.56(14.2)	0.92(23.4)
3/8	3/8	-LM-FL6-NS6	1.23(31.2)	0.66(16.8)	0.69(17.5)	0.69(17.5)	0.28(7.1)	0.56(14.2)	1.03(26.2)
1/2	1/2	-LM-FL8-NS8	1.42(36.1)	0.90(22.9)	0.87(22.2)	0.81(20.6)	0.41(10.4)	0.75(19.1)	1.30(33.0)


Metric Tube								NPT Thread	
T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm (in.)						
			L	C	G	F	E	B	Lx
6	1/4	-LM-ML6-NS4	27.0(1.06)	15.3(0.60)	14.0(0.55)	12.7(0.50)	4.8(0.19)	14.2(0.56)	23.4(0.92)
8	3/8	-LM-ML8-NS6	30.6(1.20)	16.2(0.64)	16.0(0.63)	17.5(0.69)	6.4(0.25)	14.2(0.56)	26.2(1.03)
10	3/8	-LM-ML10-NS6	31.5(1.24)	17.2(0.68)	19.0(0.75)	17.5(0.69)	7.9(0.31)	14.2(0.56)	26.2(1.03)
12	1/2	-LM-ML12-NS8	36.0(1.42)	22.8(0.90)	22.0(0.87)	20.6(0.81)	9.5(0.37)	19.1(0.75)	33.0(1.30)

Metal Flexible Hoses

MH, MM Series

Features

- Core tube and fitting material: 316 SS
- Overbraid material: 304 SS
- For vacuum and positive pressure applications
- Maximum working pressure: 3100 psig (213 bar)
- Hose size: 1/4" to 1"
- Temperature: -325°F to 800°F (-200°C to 426°C)
- End connections:
 - 1/8 to 1 thread
 - 3/16" to 1" and 6 mm to 22 mm tube fitting
- Welded fitting-to-hose construction to ensure reliable seal
- Standard and custom length available

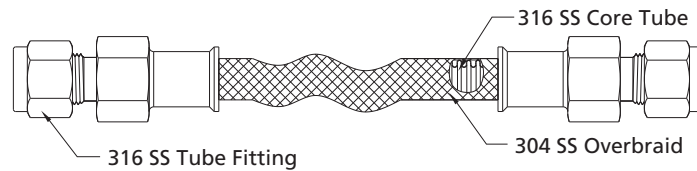

Hose Technical Data (MH Series)

Nominal Hose Size	Inside Diameter	Min. Bend Radius		Temperature Range	Working Pressure @ 70°F (20°C)	Burst Pressure @ 70°F (20°C)	Hose Series
		Static	Dynamic				
in. (mm)	in. (mm)	in. (mm)	in. (mm)	°F (°C)	psig (bar)	psig (bar)	
1/4 (6.4)	0.28 (7.1)	2.25 (57.2)	10.0 (254)	-325 to 800 (-200 to 426)	3100 (213)	12400 (854)	MH4
3/8 (9.7)	0.42 (10.6)	3.00 (76.2)	12.0 (305)		2000 (137)	8000 (551)	MH6
1/2 (12.7)	0.53 (13.5)	4.50 (114)	16.0 (406)		1800 (124)	7200 (496)	MH8
3/4 (19.0)	0.80 (20.3)	6.00 (152)	17.0 (432)		1500 (103)	6000 (413)	MH12
1 (25.4)	1.03 (26.0)	6.75 (171)	20.0 (508)		1200 (82.6)	4800 (330)	MH16

Hose Technical Data (MM Series)

Nominal Hose Size	Inside Diameter	Min. Bend Radius		Temperature Range	Working Pressure @ 70°F (20°C)	Burst Pressure @ 70°F (20°C)	Hose Series
		Static	Dynamic				
in. (mm)	in. (mm)	in. (mm)	in. (mm)	°F (°C)	psig (bar)	psig (bar)	
1/4 (6.4)	0.25 (6.4)	0.75 (19.0)	4.33 (110)	-325 to 800 (-200 to 426)	1600 (110)	6400 (440)	MM4
3/8 (9.7)	0.38 (9.5)	0.87 (22.1)	5.91 (150)		1470 (101)	6000 (413)	MM6
1/2 (12.7)	0.50 (12.7)	1.04 (26.4)	6.50 (165)		1110 (76.4)	4500 (310)	MM8
3/4 (19.0)	0.75 (19.0)	1.61 (40.9)	8.86 (225)		860 (59.2)	3500 (241)	MM12
1 (25.4)	1.00 (25.4)	1.89 (48.0)	10.2 (259)		680 (46.8)	2680 (184)	MM16

Cylinder Connections



CGA DISS Series	B-16
-----------------	------

CGA Series	B-20
------------	------

DIN Series	B-27
------------	------

Gas Connection Assignment Table	B-28
---------------------------------	------

Features

- 100% visual inspection of critical surfaces
- Diverse material and configurations available
- Silver-plated nut threads to reduce installation torque
- Every fitting marked with size, material and heat number
- Cleaned and packaged for Oxygen and Ultra High Purity Service available
- Customized solutions available

Material


Series	Component	Material	Designator
CGA DISS	Nipples	316L SS	6L
	Nuts	304 SS	S4
	Gaskets	Nickel 200	NI
		PCTFE	K
		Aluminum	AL
	Plugs	316L SS	6L
	Adapters	316L SS	6L
CGA DIN	Caps	316L SS	6L
	Nipples	316L SS	6L
	Nuts	304 SS	S4
	Gaskets	PTFE	T
		PCTFE	K
	Plugs, Caps	316L SS	6L
	Adapters	316L SS	6L

Notes:

- Nickel gasket heat treated; surface hardness < HB 100
- 316L SS in compliance with SEMI F20

Ordering information


- Add material designator as a prefix to the basic ordering number to get the complete ordering number.
Example: 6L-C634-L-FR4
- CGA, DIN Series
PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.
Example: 6L-C350-NS4-**K**
- CGA DISS Series
Nickel is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.
Example: 6L-C632-FR4-**K**

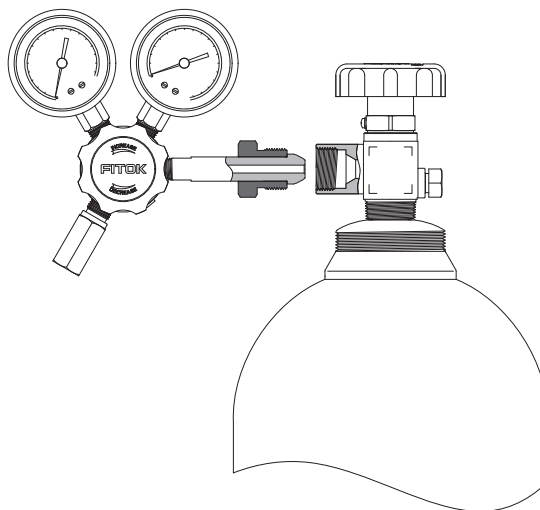

CGA DISS Series

- Non-rotating design
- Nipple with TB or FR fitting electropolished with internal surface roughness finished to an average of Ra 9 µin. (0.23 µm)
- Cleaned for Ultra High Purity Service; packaged in a Class 100 clean room
- Test with helium (maximum allowable leak rate: 1 x 10⁻⁹ mbar·l/s)

Cylinder Connections (Including Nipples, Nuts and Gaskets)

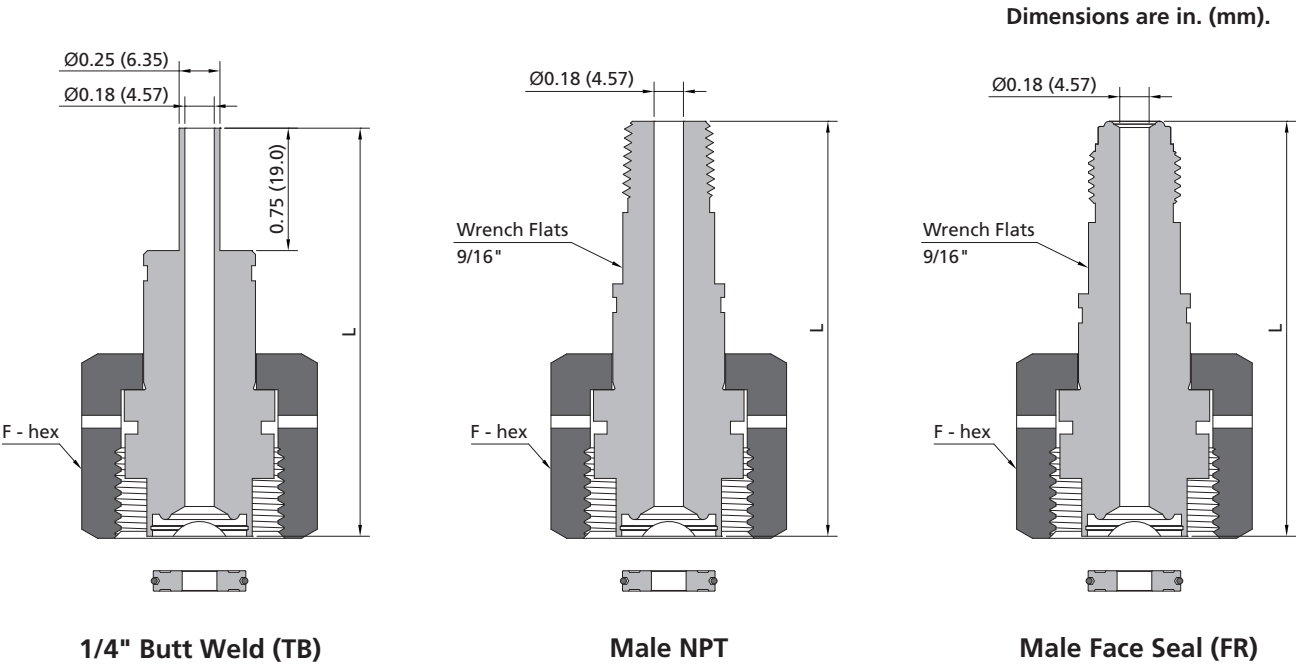

CGA Number	End Connection	Assembly Basic Ordering Number	Nipple Basic Ordering Number	Nut Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)	
						L	F
632	1/4" TB	-C632-TB4	-C632-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C632-FR4	-C632-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C632-NS4	-C632-L-NS4			3 (76.2)	1 1/4 (31.8)
634	1/4" TB	-C634-TB4	-C634-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C634-FR4	-C634-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C634-NS4	-C634-L-NS4			3 (76.2)	1 1/4 (31.8)
636	1/4" TB	-C636-TB4	-C636-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C636-FR4	-C636-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C636-NS4	-C636-L-NS4			3 (76.2)	1 1/4 (31.8)
638	1/4" TB	-C638-TB4	-C638-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C638-FR4	-C638-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C638-NS4	-C638-L-NS4			3 (76.2)	1 1/4 (31.8)


CGA Number	End Connection	Assembly Basic Ordering Number	Nipple Basic Ordering Number	Nut Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)	
						L	F
640	1/4" TB	-C640-TB4	-C640-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C640-FR4	-C640-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C640-NS4	-C640-L-NS4			3 (76.2)	1 1/4 (31.8)
642	1/4" TB	-C642-TB4	-C642-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C642-FR4	-C642-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C642-NS4	-C642-L-NS4			3 (76.2)	1 1/4 (31.8)
712	1/4" TB	-C712-TB4	-C712-L-TB4	-C710-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C712-FR4	-C712-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C712-NS4	-C712-L-NS4			3 (76.2)	1 3/8 (34.9)
714	1/4" TB	-C714-TB4	-C714-L-TB4	-C710-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C714-FR4	-C714-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C714-NS4	-C714-L-NS4			3 (76.2)	1 3/8 (34.9)
716	1/4" TB	-C716-TB4	-C716-L-TB4	-C710-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C716-FR4	-C716-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C716-NS4	-C716-L-NS4			3 (76.2)	1 3/8 (34.9)
718	1/4" TB	-C718-TB4	-C718-L-TB4	-C710-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C718-FR4	-C718-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C718-NS4	-C718-L-NS4			3 (76.2)	1 3/8 (34.9)
720	1/4" TB	-C720-TB4	-C720-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C720-FR4	-C720-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C720-NS4	-C720-L-NS4			3 (76.2)	1 3/8 (34.9)
722	1/4" TB	-C722-TB4	-C722-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C722-FR4	-C722-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C722-NS4	-C722-L-NS4			3 (76.2)	1 3/8 (34.9)
724	1/4" TB	-C724-TB4	-C724-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C724-FR4	-C724-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C724-NS4	-C724-L-NS4			3 (76.2)	1 3/8 (34.9)
726	1/4" TB	-C726-TB4	-C726-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C726-FR4	-C726-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C726-NS4	-C726-L-NS4			3 (76.2)	1 3/8 (34.9)
728	1/4" TB	-C728-TB4	-C728-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C728-FR4	-C728-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C728-NS4	-C728-L-NS4			3 (76.2)	1 3/8 (34.9)

Note:

Nickel is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: 6L-C638-TB4-K


Gaskets

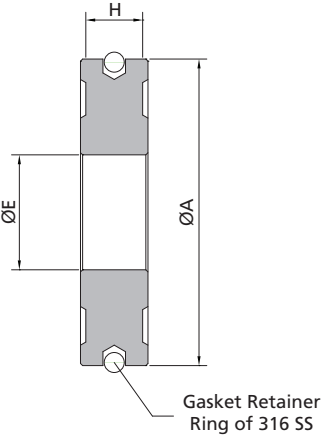


CGA Number	Gasket Ordering Number	Material	Dimensions					
			A		E		H	
			in.	mm	in.	mm	in.	mm
632~728	NI-C630-GT	Nickel 200	0.56	14.3	0.21	5.4	0.105	2.7
	K-C630-GT	PCTFE	0.56	14.3	0.21	5.4	0.125	3.2
	AL-C630-GT	Aluminum	0.56	14.3	0.21	5.4	0.105	2.7

Outlet Adaptors

Female NPT




Male Face Seal (FR)



CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
632	-C632-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
634	-C634-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
636	-C636-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
638	-C638-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
640	-C640-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
642	-C642-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
712	-C712-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
714	-C714-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
716	-C716-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
718	-C718-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
720	-C720-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
722	-C722-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
724	-C724-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
726	-C726-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
728	-C728-A-FNS4	1.85 (47.0)	1 1/4 (31.8)


CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
632	-C632-A-FR4	2.0 (50.8)	1 1/8 (28.6)
634	-C634-A-FR4	2.0 (50.8)	1 1/8 (28.6)
636	-C636-A-FR4	2.0 (50.8)	1 1/8 (28.6)
638	-C638-A-FR4	2.0 (50.8)	1 1/8 (28.6)
640	-C640-A-FR4	2.0 (50.8)	1 1/8 (28.6)
642	-C642-A-FR4	2.0 (50.8)	1 1/8 (28.6)
712	-C712-A-FR4	2.0 (50.8)	1 1/4 (31.8)
714	-C714-A-FR4	2.0 (50.8)	1 1/4 (31.8)
716	-C716-A-FR4	2.0 (50.8)	1 1/4 (31.8)
718	-C718-A-FR4	2.0 (50.8)	1 1/4 (31.8)
720	-C720-A-FR4	2.0 (50.8)	1 1/4 (31.8)
722	-C722-A-FR4	2.0 (50.8)	1 1/4 (31.8)
724	-C724-A-FR4	2.0 (50.8)	1 1/4 (31.8)
726	-C726-A-FR4	2.0 (50.8)	1 1/4 (31.8)
728	-C728-A-FR4	2.0 (50.8)	1 1/4 (31.8)

Blank Plugs



CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
632	-C632-BP	1.53 (38.9)	1 1/8 (28.6)
634	-C634-BP	1.53 (38.9)	1 1/8 (28.6)
636	-C636-BP	1.53 (38.9)	1 1/8 (28.6)
638	-C638-BP	1.53 (38.9)	1 1/8 (28.6)
640	-C640-BP	1.53 (38.9)	1 1/8 (28.6)
642	-C642-BP	1.53 (38.9)	1 1/8 (28.6)
712	-C712-BP	1.53 (38.9)	1 1/4 (31.8)
714	-C714-BP	1.53 (38.9)	1 1/4 (31.8)
716	-C716-BP	1.53 (38.9)	1 1/4 (31.8)
718	-C718-BP	1.53 (38.9)	1 1/4 (31.8)
720	-C720-BP	1.53 (38.9)	1 1/4 (31.8)
722	-C722-BP	1.53 (38.9)	1 1/4 (31.8)
724	-C724-BP	1.53 (38.9)	1 1/4 (31.8)
726	-C726-BP	1.53 (38.9)	1 1/4 (31.8)
728	-C728-BP	1.53 (38.9)	1 1/4 (31.8)

Valve Outlet Caps (Including Chains, Rings and Gaskets)

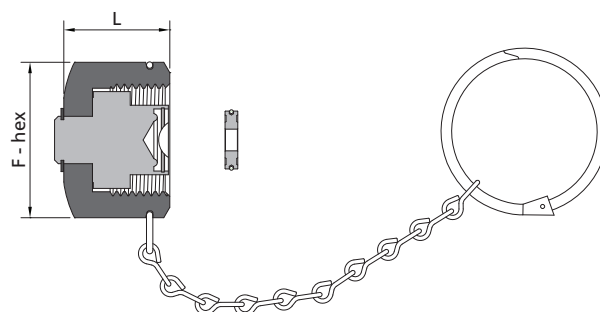

CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
632	-C632-CP	0.98 (24.9)	1 1/4 (31.8)
634	-C634-CP	0.98 (24.9)	1 1/4 (31.8)
636	-C636-CP	0.98 (24.9)	1 1/4 (31.8)
638	-C638-CP	0.98 (24.9)	1 1/4 (31.8)
640	-C640-CP	0.98 (24.9)	1 1/4 (31.8)
642	-C642-CP	0.98 (24.9)	1 1/4 (31.8)
712	-C712-CP	0.98 (24.9)	1 3/8 (34.9)
714	-C714-CP	0.98 (24.9)	1 3/8 (34.9)
716	-C716-CP	0.98 (24.9)	1 3/8 (34.9)
718	-C718-CP	0.98 (24.9)	1 3/8 (34.9)
720	-C720-CP	0.98 (24.9)	1 3/8 (34.9)
722	-C722-CP	0.98 (24.9)	1 3/8 (34.9)
724	-C724-CP	0.98 (24.9)	1 3/8 (34.9)
726	-C726-CP	0.98 (24.9)	1 3/8 (34.9)
728	-C728-CP	0.98 (24.9)	1 3/8 (34.9)

Note:

Nickel is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.


Example: 6L-C632-CP-**K**

CGA Series


- CGA V-1-2005 compliant
- Nipple with TB or FR fitting electropolished with internal surface roughness finished to an average of Ra 9 µin. (0.23 µm)
- Test with helium (maximum allowable leak rate: 1 x 10⁻⁹ mbar·l/s)

Cylinder Connections (Including Nipples, Nuts and Gaskets)


Dimensions are in. (mm).

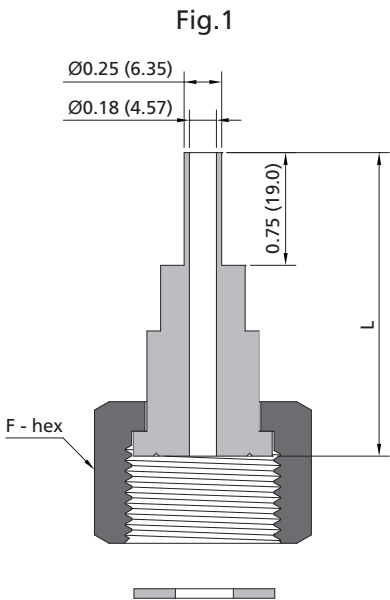

1/4" Butt Weld (TB)

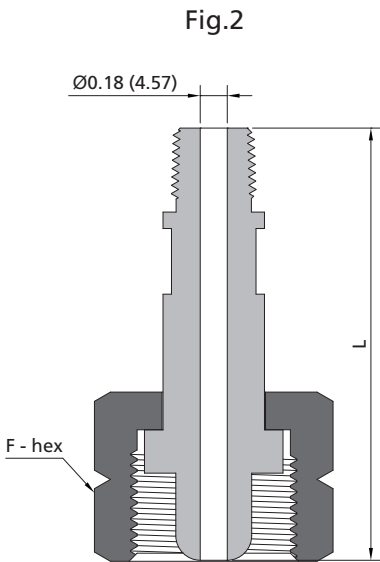

Male NPT

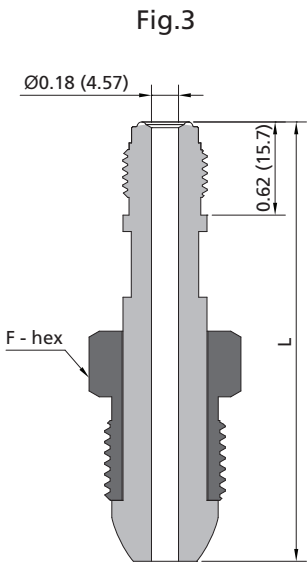

Male Face Seal (FR)

CGA Number	Ref. Fig.	End Connection	Assembly Basic Ordering Number	Nipple Basic Ordering Number	Nut Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)	
							L	F
170	Fig.1	1/4" TB	-C170-TB4	-C170-L-TB4	-C170-N	-C170-GT	1.25 (31.8)	11/16 (17.5)
		1/8" NPT	-C170-NS2	-C170-L-NS2			1.25 (31.8)	
180	Fig.1	1/4" TB	-C180-TB4	-C180-L-TB4	-C180-N	-C180-GT	1.25 (31.8)	3/4 (19.1)
		1/8" NPT	-C180-NS2	-C180-L-NS2			1.75 (44.5)	
290	Fig.2	1/4" TB	-C290-TB4	-C290-L-TB4	-C290-N	—	2.63 (66.7)	1 (25.4)
		1/4" NPT	-C290-NS4	-C290-L-NS4			2.25 (57.2)	
296	Fig.3	1/4" TB	-C296-TB4	-C296-L-TB4	-C296-N	—	2.63 (66.7)	7/8 (22.3)
		1/4" NPT	-C296-NS4	-C296-L-NS4			3.5 (88.9)	
		1/4" FR	-C296-FR4	-C296-L-FR4			2.75 (69.9)	
320	Fig.1	1/4" TB	-C320-TB4	-C320-L-TB4	-C320-N	-C320-GT	1.75 (44.5)	1 1/8 (28.6)
		1/4" NPT	-C320-NS4	-C320-L-NS4			2.5 (63.5)	
		1/4" FR	-C320-FR4	-C320-L-FR4			1.75 (44.5)	

CGA Number	Ref. Fig.	End Connection	Assembly Basic Ordering Number	Nipple Basic Ordering Number	Nut Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)	
							L	F
326	Fig.2	1/4" TB	-C326-TB4	-C326-L-TB4	-C326-N	—	2.25 (57.2)	1 1/8 (28.6)
		1/4" NPT	-C326-NS4	-C326-L-NS4			3.0 (76.2)	
		1/4" FR	-C326-FR4	-C326-L-FR4			2.25 (57.2)	
330	Fig.1	1/4" TB	-C330-TB4	-C320-L-TB4	-C330-N	-C320-GT	1.75 (44.5)	1 1/8 (28.6)
		1/4" NPT	-C330-NS4	-C320-L-NS4			2.5 (63.5)	
		1/4" FR	-C330-FR4	-C320-L-FR4			1.75 (44.5)	
346	Fig.2	1/4" TB	-C346-TB4	-C346-L-TB4	-C346-N	—	2.31 (58.7)	1 1/8 (28.6)
		1/4" NPT	-C346-NS4	-C346-L-NS4			3.0 (76.2)	
		1/4" FR	-C346-FR4	-C346-L-FR4			2.25 (57.2)	
350	Fig.2	1/4" TB	-C350-TB4	-C350-L-TB4	-C350-N	—	2.31 (58.7)	1 1/8 (28.6)
		1/4" NPT	-C350-NS4	-C350-L-NS4			3.0 (76.2)	
		1/4" FR	-C350-FR4	-C350-L-FR4			2.25 (57.2)	
510	Fig.3	1/4" TB	-C510-TB4	-C510-L-TB4	-C510-N	—	2.63 (66.7)	1 1/8 (28.6)
		1/4" NPT	-C510-NS4	-C510-L-NS4			3.5 (88.9)	
		1/4" FR	-C510-FR4	-C510-L-FR4			2.75 (69.9)	
540 ^①	Fig.2	1/4" TB	-C540-TB4	-C540-L-TB4	-C540-N	—	2.25 (57.2)	1 1/8 (28.6)
		1/4" NPT	-C540-NS4	-C540-L-NS4			3.0 (76.2)	
		1/4" FR	-C540-FR4	-C540-L-FR4			2.25 (57.2)	
580	Fig.3	1/4" TB	-C580-TB4	-C510-L-TB4	-C580-N	—	2.63 (66.7)	1 1/8 (28.6)
		1/4" NPT	-C580-NS4	-C510-L-NS4			3.5 (88.9)	
		1/4" FR	-C580-FR4	-C510-L-FR4			2.75 (69.9)	
590	Fig.3	1/4" TB	-C590-TB4	-C510-L-TB4	-C590-N	—	2.63 (66.7)	1 1/8 (28.6)
		1/4" NPT	-C590-NS4	-C510-L-NS4			3.5 (88.9)	
		1/4" FR	-C590-FR4	-C510-L-FR4			2.75 (69.9)	
660	Fig.1	1/4" TB	-C660-TB4	-C660-L-TB4	-C660-N	-C660-GT	2.19 (55.6)	1 1/4 (31.8)
		1/4" NPT	-C660-NS4	-C660-L-NS4			2.5 (63.5)	
		1/4" FR	-C660-FR4	-C660-L-FR4			1.88 (47.6)	
670	Fig.1	1/4" TB	-C670-TB4	-C660-L-TB4	-C670-N	-C660-GT	2.19 (55.6)	1 1/4 (31.8)
		1/4" NPT	-C670-NS4	-C660-L-NS4			2.5 (63.5)	
		1/4" FR	-C670-FR4	-C660-L-FR4			1.88 (47.6)	
678	Fig.1	1/4" TB	-C678-TB4	-C678-L-TB4	-C678-N	-C678-GT	2.5 (63.5)	1 1/4 (31.8)
		1/4" NPT	-C678-NS4	-C678-L-NS4			2.5 (63.5)	
		1/4" FR	-C678-FR4	-C678-L-FR4			2.0 (50.8)	
679	Fig.1	1/4" TB	-C679-TB4	-C679-L-TB4	-C679-N	-C679-GT	2.5 (63.5)	1 1/4 (31.8)
		1/4" NPT	-C679-NS4	-C679-L-NS4			3.0 (76.2)	
		1/4" FR	-C679-FR4	-C679-L-FR4			2.0 (50.8)	


① Cleaned and packaged for Oxygen Service.

Note:

PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: 6L-C170-FR4-K

Gaskets

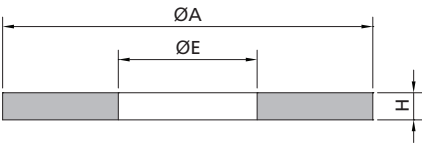


CGA Number	Gasket Basic Ordering Number	Dimensions					
		A		E		H	
		in.	mm	in.	mm	in.	mm
170	-C170-GT	0.43	11.0	0.19	4.8	0.10	2.5
180	-C180-GT	0.44	11.2	0.32	8.1	0.09	2.3
320, 330	-C320-GT	0.72	18.3	0.26	6.6	0.09	2.3
660, 670	-C660-GT	0.94	23.9	0.38	9.7	0.06	1.6
678	-C678-GT	0.61	15.5	0.30	7.6	0.06	1.6
679	-C679-GT	0.53	13.5	0.31	7.9	0.06	1.6

Outlet Adaptors, Blank Caps and Plugs


Blank Caps

CGA 580




Blank Plugs

CGA 350




Male Face Seal (FR)

CGA 350



Female NPT


CGA 350



CGA Number	End Connection	Assembly Basic Ordering Number	Dimensions, in. (mm)	
			L	F
180	1/4" Female NPT	-C180-A-FNS4	1.38 (35.0)	3/4 (19.1)
296	Blank Cap	-C296-BC	1.37 (34.8)	1 1/8 (28.6)
	1/4" Female NPT	-C296-A-FNS4	2.0 (50.8)	
	1/4" FR	-C296-A-FR4	2.0 (50.8)	
320	Blank Plug	-C320-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C320-A-FNS4	1.12 (28.4)	
	1/4" FR	-C320-A-FR4	1.74 (44.2)	
326	Blank Plug	-C326-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C326-A-FNS4	1.31 (33.3)	
	1/4" FR	-C326-A-FR4	1.74 (44.2)	
330	Blank Plug	-C330-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C330-A-FNS4	1.31 (33.3)	
	1/4" FR	-C330-A-FR4	1.74 (44.2)	
346	Blank Plug	-C346-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C346-A-FNS4	1.31 (33.3)	
	1/4" FR	-C346-A-FR4	1.88 (47.8)	
350	Blank Plug	-C350-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C350-A-FNS4	1.31 (33.3)	
	1/4" FR	-C350-A-FR4	1.88 (47.8)	
510	Blank Cap	-C510-BC	1.37 (34.8)	1 1/4 (31.8)
	1/4" Female NPT	-C510-A-FNS4	2.0 (50.8)	
	1/4" FR	-C510-A-FR4	2.0 (50.8)	
540 ^①	Blank Plug	-C540-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C540-A-FNS4	1.25 (31.8)	
	1/4" FR	-C540-A-FR4	1.87 (47.5)	
580	Blank Cap	-C580-BC	1.37 (34.8)	1 1/4 (31.8)
	1/4" Female NPT	-C580-A-FNS4	2.0 (50.8)	
	1/4" FR	-C580-A-FR4	2.0 (50.8)	


① Cleaned and packaged for Oxygen Service.

Female NPT
CGA 350




CGA Number	End Connection	Assembly Basic Ordering Number	Dimensions, in. (mm)	
			L	F
590	Blank Cap	-C590-BC	1.37 (34.8)	1 1/4 (31.8)
	1/4" Female NPT	-C590-A-FNS4	2.0 (50.8)	
	1/4" FR	-C590-A-FR4	2.0 (50.8)	
660	Blank Plug	-C660-BP	0.88 (22.4)	1 1/8 (28.6)
	1/4" Female NPT	-C660-A-FNS4	1.25 (31.8)	
	1/4" FR	-C660-A-FR4	1.5 (38.1)	
670	Blank Plug	-C670-BP	0.88 (22.4)	1 1/8 (28.6)
	1/4" Female NPT	-C670-A-FNS4	1.25 (31.8)	
	1/4" FR	-C670-A-FR4	1.5 (38.1)	
678	Blank Plug	-C678-BP	1.0 (25.4)	1 1/8 (28.6)
	1/4" Female NPT	-C678-A-FNS4	1.38 (35.1)	
	1/4" FR	-C678-A-FR4	1.5 (38.1)	
679	Blank Plug	-C679-BP	0.88 (22.4)	1 1/8 (28.6)
	1/4" Female NPT	-C679-A-FNS4	1.25 (31.8)	
	1/4" FR	-C679-A-FR4	1.75 (44.5)	

Cylinder Valve Outlet Plugs

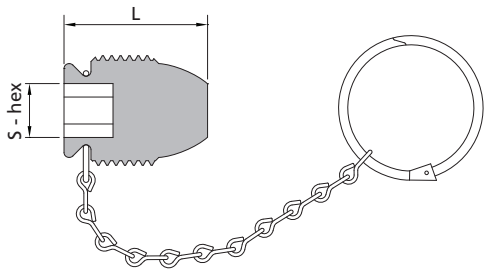

CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	S
510	-C510-PG	1.0 (25.4)	3/8 (9.5)
580	-C580-PG	1.0 (25.4)	
590	-C590-PG	1.0 (25.4)	

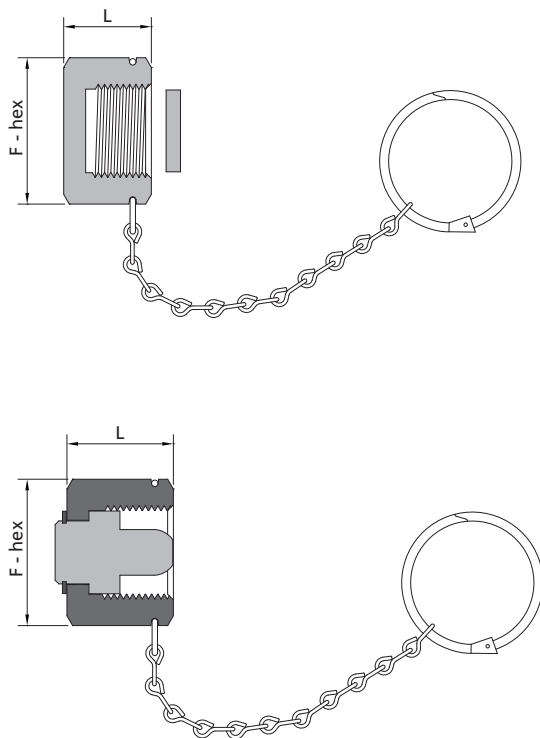

CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
320	-C320-CP	0.54 (13.7)	1 (25.4)
326	-C320-CP	0.54 (13.7)	
330	-C330-CP	0.54 (13.7)	
346	-C320-CP	0.54 (13.7)	
660	-C660-CP	0.54 (13.7)	1 1/4 (31.8)
670	-C670-CP	0.54 (13.7)	
678	-C670-CP	0.54 (13.7)	
679	-C670-CP	0.54 (13.7)	

Notes:

1. PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: S4-C330-CP-K

2. The caps listed above are only intended to keep valve outlets clean and protect its threads. They shouldn't be used to contain pressure if the valve leaks or is opened by mistake.

CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
350	-C350-CP	0.82 (20.8)	1 1/8 (28.6)

Complete Pigtail Connections (Including Nipples, Nuts, Gaskets and Blank Plugs or Caps)

Dimensions are in. (mm).

Fig.1


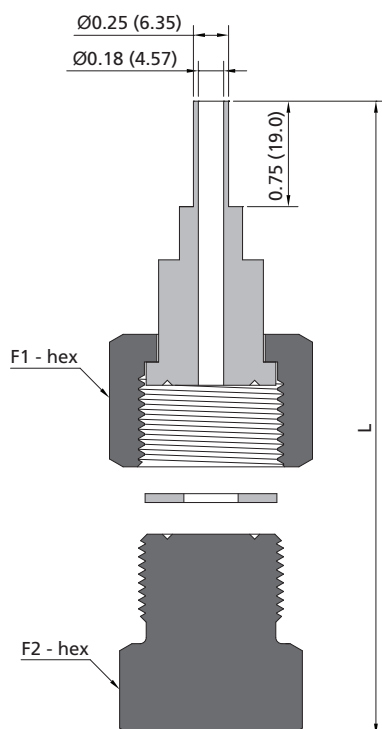


Fig.2

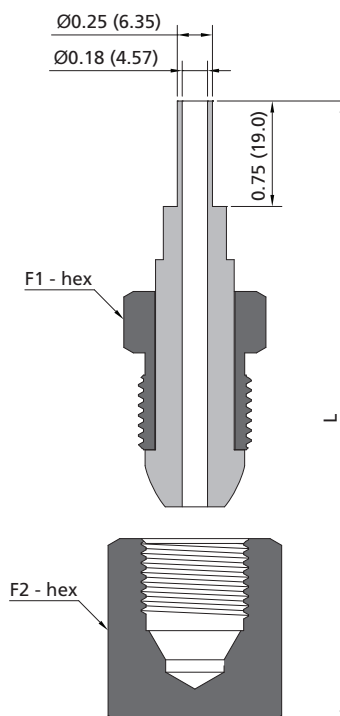

CGA Number	Ref. Fig.	Assembly Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)		
				L	F1	F2
296	Fig.2	-C296-TB4-A	—	3.03 (77.0)	7/8 (22.3)	1 1/8 (28.6)
320	Fig.1	-C320-TB4-A	-C320-GT	2.96 (75.2)	1 1/8 (28.6)	1 (25.4)
326	Fig.1	-C326-TB4-A	—	3.01 (76.5)		
330	Fig.1	-C330-TB4-A	-C320-GT	2.96 (75.2)		
346	Fig.1	-C346-TB4-A	—	2.97 (75.4)		
350	Fig.1	-C350-TB4-A	—	2.96 (75.2)		1 1/4 (31.8)
510	Fig.2	-C510-TB4-A	—	3.03 (77.0)		
540 ^①	Fig.1	-C540-TB4-A	—	2.96 (75.2)		1 (25.4)
580	Fig.2	-C580-TB4-A	—	3.03 (77.0)		1 1/4 (31.8)
590	Fig.2	-C590-TB4-A	—	3.03 (77.0)		
660	Fig.1	-C660-TB4-A	-C660-GT	2.96 (75.2)	1 1/4 (31.8)	1 1/8 (28.6)
670	Fig.1	-C670-TB4-A	-C660-GT	2.96 (75.2)		
678	Fig.1	-C678-TB4-A	-C678-GT	3.08 (78.2)		
679	Fig.1	-C679-TB4-A	-C679-GT	2.96 (75.2)		

① Cleaned and packaged for Oxygen Service.

Note:

PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: 6L-C330-TB4-A-K

Assembly Torque For CGA Cylinder Connections

CGA NO.	Recommended Torque		CGA NO.	Recommended Torque	
	ft-lb	N·m		ft-lb	N·m
170 ^①	10~15	14~20	510	35~50	47~68
180 ^①	10~15	14~20	540	40~60	54~81
290	30~45	41~61	580	40~60	54~81
296	35~50	47~68	590	40~60	54~81
320 ^①	20~30	27~41	660 ^①	30~45	41~61
326	25~35	34~47	670 ^①	30~45	41~61
330 ^①	20~30	27~41	678 ^①	25~35	34~47
346	35~50	47~68	679 ^①	25~35	34~47
350	35~50	47~68			
CGA DISS NO.	Recommended Torque		Gasket Material		
	ft-lb	N·m			
632-728	35~40	47~53.8	Nickel		
	12~15	16~20.1	PCTFE		


① Gasket for seal: PTFE or PCTFE.

DIN Series


- ⦿ DIN 477-1 compliant
- ⦿ Nipple with TB fitting electropolished with internal surface roughness finished to an average of Ra 9 µin. (0.23 µm)
- ⦿ Test with helium (maximum allowable leak rate: 1 x 10⁻⁹ mbar·l/s)

Complete Pigtail Connections (Including Nipples, Nuts, Gaskets and Blank Plugs)

Dimensions are in. (mm).

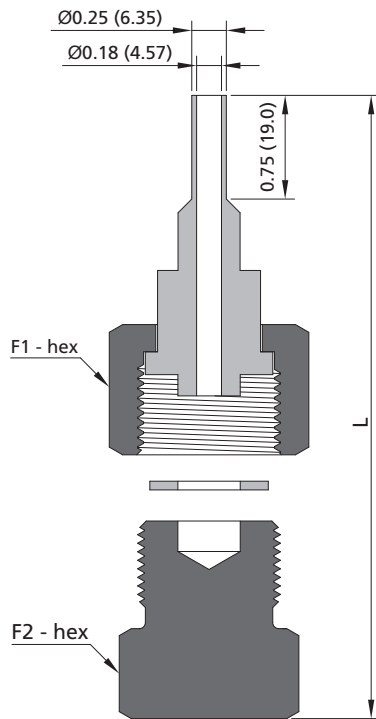

1/4" Butt Weld (TB)

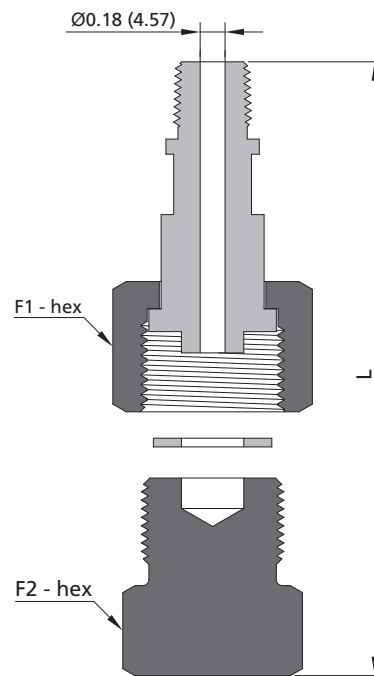

Male NPT

DIN Number	Assembly Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in.(mm)		
			L	F1	F2
1	-DIN1-TB4-A	-DIN1-GT	2.96 (75.2)	1 1/4 (31.8)	1 1/4 (31.8)
	-DIN1-NS4-A		4.25 (108)		
5	-DIN5-TB4-A	-DIN5-GT	3.09 (78.5)		
	-DIN5-NS4-A		4.41 (112)		
6	-DIN6-TB4-A	-DIN1-GT	2.96 (75.2)		
	-DIN6-NS4-A		4.25 (108)		
8	-DIN8-TB4-A	-DIN5-GT	3.09 (78.5)		
	-DIN8-NS4-A		4.41 (112)		
11	-DIN11-TB4-A	-DIN11-GT	2.88 (73.2)	7/8 (22.3)	11/16 (17.5)
	-DIN11-NS4-A		4.14 (105.2)		
14	-DIN14-TB4-A		2.88 (73.2)	1 1/16 (27.0)	7/8 (22.3)
	-DIN14-NS4-A		4.15 (105.5)		

Notes:

1. Above components can be ordered separately.

2. PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: 6L-D1N1-TB4-A-K

Gas Connection Assignment Table[®]

GAS	Formula	UHP CGA	CGA	DIN	JIS
Ammonia	NH ₃	720	705	DIN6	22-R
Argon	Ar	718	580	DIN6	22-R or 23-R
Arsenic Pentafluoride	AsF ₅	642	—	—	—
Arsine	AsH ₃	632	350	—	22-L
Boron Trichloride	BCl ₃	634	660	DIN8	—
Boron Trifluoride	BF ₃	642	330	DIN8	22-L
Carbon Dioxide	CO ₂	716	320	DIN6	—
Carbon Monoxide	CO	724	350	DIN5	22-L
Chlorine	Cl ₂	728	—	DIN8	26-R
Diborane	B ₂ H ₆	632	350	—	22-L
Dichlorosilane	SiH ₂ Cl ₂	636	678 ^①	DIN5	—
Diethylzinc	Zn(C ₂ H ₅) ₂	726	510 ^②	—	—
Diethyltelluride	(C ₂ H ₅) ₂ Te	726	—	—	—
Dimethylzinc	(CH ₃) ₂ Zn	726	—	—	—
Disilane	Si ₂ H ₆	632	—	—	—
Germane	GeH ₄	632	350 or 660	—	—
Halocarbon 11	CCl ₃ F	716	660	—	—
Halocarbon 115	ClCF ₂ CF ₃	716	660	DIN6	—
Halocarbon 12	CCl ₂ F ₂	716	660	DIN6	—
Halocarbon 13	ClCF ₃	716	660	DIN6	—
Halocarbon 14	CF ₄	716	320 or 580	DIN6	—
Halocarbon 23	CHF ₃	716	660	DIN6	—
Halocarbon 116	F ₃ CCF ₃	716	660	—	—
Helium	He	718	580	DIN6	22-R or 23-R
Hydrogen	H ₂	724	350	DIN1	22-L
Hydrogen Bromide	HBr	634	330	DIN8	26-R
Hydrogen Chloride	HCl	634	330	DIN8	26-R
Hydrogen Fluoride	HF	638	660 or 670	—	26-R
Hydrogen Sulfide	H ₂ S	722	330	DIN5	—
Krypton	Kr	718	580	DIN6	22-R or 23-R
Neon	Ne	718	580	DIN6	22-R or 23-R
Nitrogen	N ₂	718	580	DIN10	22-R or 23-R
Nitrogen Trifluoride	NF ₃	640	330 or 670	DIN8	—
Nitrous Oxide	N ₂ O	712	326	DIN8	—
Oxygen	O ₂	714	540	DIN9	22-R or 23-R
Perfluoropropane	CF ₂ (CF ₃)	716	660	—	—
Phosphine	PH ₃	632	350 or 660	DIN1	—
Phosphorus Pentafluoride	PF ₅	642	330 or 660	—	—
Silane	SiH ₄	632	350	—	—
Silicon Tetrachloride	SiCl ₄	636	—	—	—
Silicon Tetrafluoride	SiF ₄	642	330	—	22-L
Sulphur Hexafluoride	SF ₆	716	590	DIN6	26-R
Trichlorosilane	SiHCl ₃	636	—	—	—
Triethylaluminum	(C ₂ H ₅) ₃ Al	726	510 ^②	—	—
Tungsten Hexafluoride	WF ₆	638	670	DIN8	—
Xenon	Xe	718	580	DIN6	22-R

① Refer to CGA organization specification for pressure limits.

② Information in this table is for reference only.

C

Technical References

Common Terms and Definitions	C-02
Gas Purity Values	C-03
How to Use the FITOK Flow Charts	C-04
Conversion Factors	C-05
Material Compatibility for Gases	C-06
Ordering Details for Specialty Gas Equipment	C-08

Common Terms and Definitions

Inlet Pressure

The pressure of media of gas or liquid on the inlet port of the regulator or valve;
Typical units of measure: psig, bar and MPa.

Outlet Pressure

The pressure of media of gas or liquid on the outlet port of the regulator or valve.

Accuracy

The variation in control pressure which occurs under steady state conditions within the control range of a regulator.

Sensitivity

The ability of a pressure regulator to respond to change in discharge conditions: pressure, flow, temperature, etc.

Flow Coefficient (Cv)

A flow coefficient that is numerically equal to the number of U.S. Gallons of water at 60°F/16°C that will flow through a valve or regulator in one minute when the pressure differential between the inlet and outlet is 1 psi. When gas is used instead of liquid, the equation is modified to account for the use of a compressible fluid. For a regulator, Cv is determined when the regulator is wide open and not regulating. When determining flow performance use actual flow curves.

Leakage - External

The loss of fluid from the external surfaces or joints of a regulator or valve. Example: From the body-bonnet-diaphragm joint. Leakage to atmosphere. The leakage rate is measured in mbar l/s Helium.

Leakage - Internal

The loss of fluid through a regulator or valve, between pressure zones normally expected to be sealed. Example: Between the inlet pressure and the outlet pressure zones.

Load Element

One of the three basic elements of a pressure reducing regulator. It provides the means by which the operator can set the force that determines the control pressure of a regulator. This element includes the spring and the stem.

Sensing Element

One of the three basic elements of a pressure reducing regulator. It senses the changes of the outlet pressure and acts as a physical connection between the load element and control element.

Control Element

One of the three basic elements of a pressure regulator to reduce the high inlet pressure to a stable lower outlet pressure by adjusting the orifice.

Diaphragm

One type of sensing elements, which is sensitive in reacting to outlet pressure change, normally used for gas media. Common material include elastomeric and metallic.

Piston

One type of sensing element. Used in high pressure regulators. Normally with O-ring seals.

Unbalanced Main Valve

Inlet pressure provides the majority of the shutoff force. The function of the main valve is to reduce the high inlet pressure to a lower outlet pressure.

Balanced Valve

A main valve designed to relieve the inlet force loading on the seat.

Venting

When the load pressure is relieved, the vent valve shall be opened by the downstream force to vent the downstream pressure.

Gas Purity Values

Type	Degree	Purity Value	Max. Contamination (ppm)
Pure	2.5	99.5%	5000
	3.0	99.9%	1000
High Purity	3.5	99.95%	500
	4.0	99.99%	100
	4.5	99.995%	50
	5.0	99.999%	10
	5.5	99.9995%	5
	6.0	99.9999%	1.0
Ultra High Purity	7.0	99.99999%	0.1

How to Use the FITOK Flow Chart

A FITOK Flow Chart is a graphic representation of test results, in curves, showing the changes in outlet pressure of a regulator with the varying flow rate basing on different inlet pressures. The regulator is so designed that at the time the outlet pressure reaches the set pressure, the flow rate would be zero. The inlet pressure is indicated on the right end of each curve.

To use the FITOK Flow Charts, the first step is to select the chart that fits the following:

- Regulator model
- Expected flow range
- Inlet pressure range
- Outlet pressure range

Subsequently, select a curve, if available, plotted for the exact inlet pressure and set pressure of the outlet (zero flow). Locate the set pressure on the vertical axis. Follow the curve until it crosses the vertical line corresponding to the desired flow rate. Read horizontally from the cross point to the vertical axis to locate the actual working pressure for this flow rate. If no curve is plotted for the exact pressure, extrapolate a new curve between and referring to the two closest existing curves.

Example:

Using the flow chart to determine the pressure drop (from the set pressure to the outlet pressure at 30 SCFM condition).

Given Conditions: Inlet pressure=3000 psig, Set pressure=2250 psig


Steps: 1. Locate the set pressure (2250 psig) with zero flow on the vertical axis;

2. Follow the curve until it crosses the vertical line corresponding to 30 SCFM;

3. Read horizontally from the cross point to the vertical axis. The corresponding pressure read is 1945 psig.

Therefore, the pressure drop is 305 psig.

Flow Chart

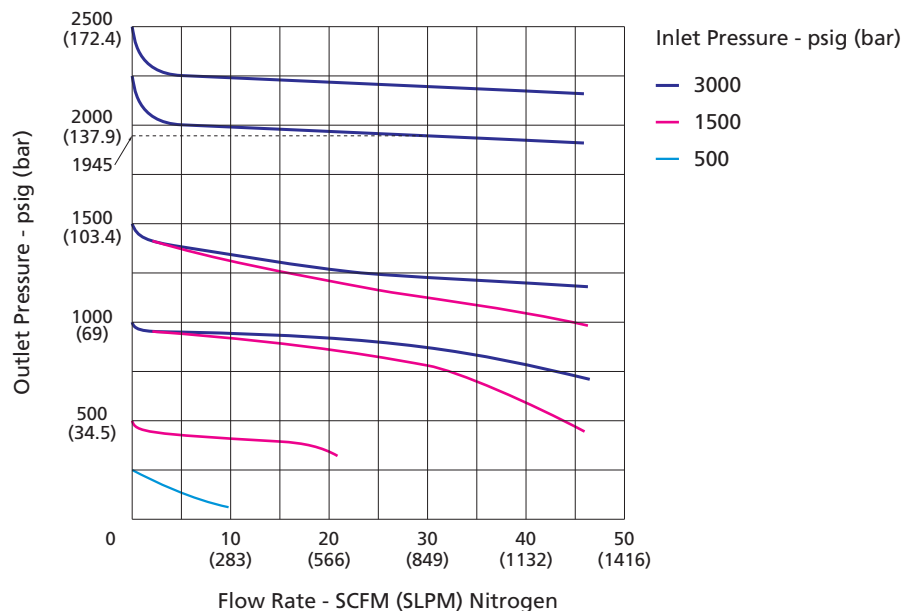

Notes:

1. The performance of regulator is more accurate in the range where the curve is comparatively flat.
2. All test results on the FITOK Flow Charts are based on utilization of Nitrogen as a medium in standard testing conditions. Please contact FITOK for additional information.

Conversion Factors

Pressure

From \ To	psi	bar	atm	KPa	ft. of H ₂ O	in. of H ₂ O	mm of Hg	in. of Hg	Kg/cm ²
psi	1	0.068948	0.06805	6.89465	2.3089	27.708	51.175	2.036	0.070307
bar	14.5038	1	0.98692	100	33.4883	401.8596	750.062	29.53	1.0197
atm	14.696	1.01325	1	101.3171	33.932	407.1827	760	29.921	1.0332
KPa	0.14504	0.010	0.00987	1	0.33456	4.01472	7.5006	0.29613	0.0102
ft. of H ₂ O	0.433107	0.029891	0.02947	2.989	1	12	22.4198	0.882646	0.03048
in. of H ₂ O	0.03609	0.002499	0.00246	0.0249089	0.08333	1	1.86832	0.073556	0.00254
mm of Hg	0.019337	0.001333	0.00132	0.133322	0.044603	0.535240	1	0.03937	0.00136
in. of Hg	0.49115	0.033864	0.03342	3.376895	1.134	13.6	25.4	1	0.034532
Kg/cm ²	14.22334	0.980665	0.9678	98.03922	32.8084	393.7008	735.5592	28.95903	1

Flow

From \ To	cm ³ /min	cm ³ /sec	ft ³ /hr	ft ³ /min	m ³ /hr	m ³ /min	L/hr	L/min
cm ³ /min	1	0.0166667	0.0021189	0.0000353	0.00006	0.000001	0.06	0.001
cm ³ /sec	60	1	0.127134	0.0021189	0.0036	0.00006	3.6	0.06
ft ³ /hr	471.9474	7.86579	1	0.0166667	0.0283168	0.0004719	28.31685	0.4719474
ft ³ /min	28316.85	471.9474	60	1	1.699008	0.0283168	1699.008	28.31686
m ³ /hr	16666.67	277.7778	35.31467	0.5885777	1	0.0166667	1000	16.66667
m ³ /min	1000000	16666.67	2118.876	35.31467	60	1	60000	1000
L/hr	16.66667	0.2777778	0.0353147	0.0005885	0.001	0.0000167	1	0.0166667
L/min	1000	16.66667	2.118876	0.0353147	0.06	0.001	60	1

Density

From \ To	gms/cm ³	kg/m ³	lbs/ft ³	lbs/in ³	lbs/U.S. gal
gms/cm ³	1	1000	62.428	0.0361273	8.3454
kg/m ³	0.001	1	0.062428	3.61273×10 ⁻⁵	0.0083454
lbs/ft ³	0.0160185	16.018463	1	5.78704×10 ⁻⁴	0.13368
lbs/in ³	27.679905	27679.9	1728	1	231
lbs/U.S. gal	0.1198264	119.8264	7.4805195	0.004329	1

Material Compatibility for Gases

Material Media	Metals						Plastics				Elastomers	
	Copper	Brass	Aluminum	SS	Hastelloy C 22	Monel	PCTFE	Teflon PTFE	PEEK	Vespel	Viton	Buna-N
Acetylene	3	2	1	1	1	1	1	1	4	4	1	1
Ammonia	3	3	2	1	1	1	1	1	4	3	3	2
Argon	1	1	1	1	1	1	1	1	1	1	1	1
Argon/Methane	1	1	1	1	1	1	1	1	1	1	1	1
Arsine	3	2	3	1	1	1	1	1	4	4	1	4
Boron Trichloride	3	3	3	2	1	1	1	1	4	4	4	3
Boron Trifluoride	3	3	3	2	1	1	1	1	4	4	4	3
N-Butane	1	1	1	1	1	1	1	1	1	1	1	1
Carbon Dioxide	1	1	1	1	1	1	1	1	1	1	1	1
Carbon Monoxide	1	1	1	1	1	1	1	1	4	4	1	1
Chlorine	3	3	3	2	1	1	1	1	4	2	1	3
Deuterium	1	1	1	1	1	1	1	1	1	1	1	1
Diborane	1	1	1	1	1	1	1	1	1	1	1	3
Ethane	1	1	1	1	1	1	1	1	1	1	1	1
Ethylene	1	1	1	1	1	1	1	1	1	1	1	1
Fluorine	2	3	2	3	3	1	2	1	3	3	3	3
Hydrogen	1	1	1	1	1	1	1	1	1	1	1	1
Hydrogen Chloride	3	3	3	2	1	1	1	1	4	2	2	3
Hydrogen Flouride	3	3	3	3	2	1	1	1	4	4	4	3
Hydrogen Sulphide	3	3	3	1	1	4	4	4	4	4	1	4
Hydrogen Lodide	3	3	3	4	4	4	4	4	4	4	4	4
Helium	1	1	1	1	1	1	1	1	1	1	1	1
Hexafluoro Ethane	1	1	1	1	1	1	2	1	4	4	4	4

Codes

- 1 Recommended
- 2 Use with Limitations
- 3 Not Applicable
- 4 Insufficient Data

Material Media	Metals						Plastics				Elastomers	
	Copper	Brass	Aluminum	SS	Hastelloy C 22	Monel	PCTFE	Teflon PTFE	PEEK	Vespel	Viton	Buna-N
Isobutene	1	1	1	1	1	1	1	1	1	1	1	1
Isobutane	1	1	1	1	1	1	1	1	1	1	1	1
Krypton	1	1	1	1	1	1	1	1	1	1	1	1
Methane	1	1	1	1	1	1	1	1	1	1	1	1
Methyl Chloride	4	4	3	1	1	4	4	1	4	4	1	3
Methyl Mercaptan	3	2	1	1	4	4	1	1	4	4	4	4
Neon	1	1	1	1	1	1	1	1	1	1	1	1
Nitrogen	1	1	1	1	1	1	1	1	1	1	1	1
Nitrous Oxide	1	1	1	1	1	1	2	1	1	1	1	1
Nitrogen Dioxide	4	2	2	1	4	2	1	1	4	4	4	4
Nitrogen Trifluoride	2	4	4	2	4	1	4	4	4	4	4	4
Nitrogen Monoxide	3	3	1	1	1	3	1	1	4	4	4	4
Phosphine	2	1	2	1	1	1	1	1	4	4	2	4
Propane	1	1	1	1	1	1	1	1	1	1	1	1
Propylene	1	1	1	1	1	1	1	1	1	1	1	3
Oxygen	1	1	1	1	1	1	1	1	1	1	1	1
Sulphur Dioxide	2	2	2	1	1	4	1	1	4	4	3	3
Sulphur Hexafluoride	1	1	1	1	1	1	1	1	1	1	1	1
Silane	1	1	1	1	1	1	1	1	4	4	1	4
Synthetic Air	1	1	1	1	1	1	1	1	1	1	1	1
Tetrafluoro Methane	1	1	1	1	1	1	1	1	4	4	1	4
Trifluoro Methane R23	1	1	1	1	1	1	1	1	4	4	4	4
Xenon	1	1	1	1	1	1	1	1	1	1	1	1

Codes

- 1 Recommended
- 2 Use with Limitations
- 3 Not Applicable
- 4 Insufficient Data

Ordering Details for Specialty Gas Equipment

Company _____

Name _____

Tel _____

E-mail _____

Application Information

Gas _____ Chemical formula _____ Purity _____

Upstream pressure _____ psig, _____ bar, _____ Mpa

Downstream pressure range _____ psig, _____ bar, _____ Mpa

Temperature _____ °C _____ °F Cv or flow rate _____





Application _____

Pressure Regulator Data

Single-stage ☐ Dual-stage ☐Material (mostly gas type dependent): Stainless Steel ☐ Brass ☐ Hastelloy ☐☒ Cylinder pressure regulator ☐Cylinder connection Yes ☐ No ☐Purge unit Yes ☐ No ☐☒ Panel and line pressure regulator ☐2 ports ☐ 3 ports ☐ 4 ports ☐☒ Pressure control panel ☐Purge unit Yes ☐ No ☐☒ Changeover system ☐With line regulator Yes ☐ No ☐☒ Point-of-use panel ☐

Warranty Information

FITOK products are backed by The FITOK Limited Lifetime Warranty. For a copy, contact FITOK Group or our authorized distributors.

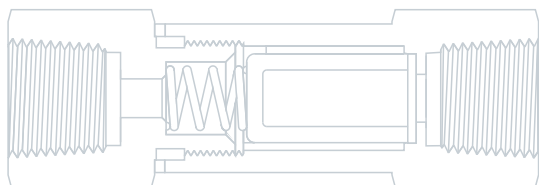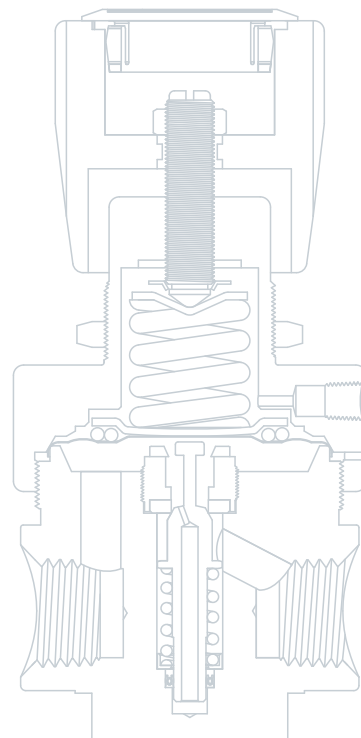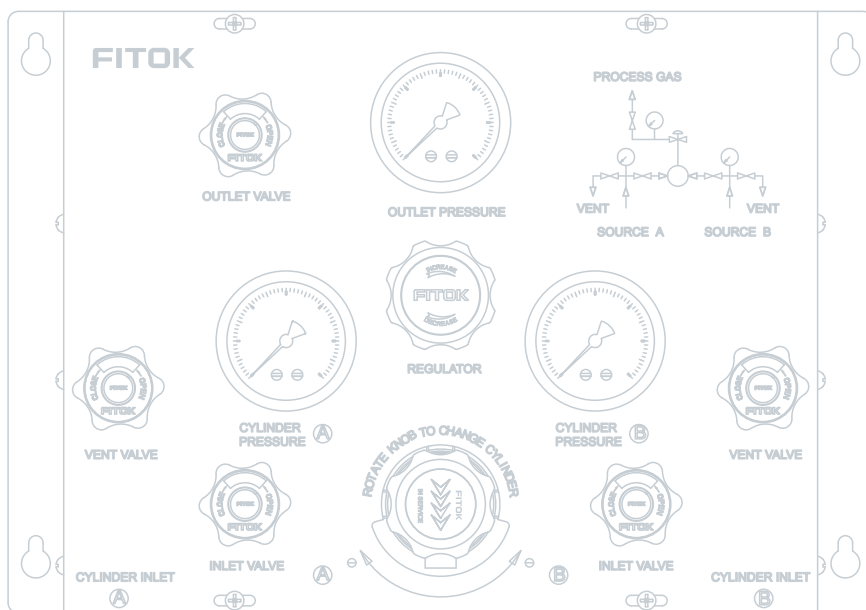

Pol. Ind. Belartza.
Gurutzegi Kalea 17 Pab. D4 – D5
20018 San Sebastián
Tel. 943 377 740 Fax: 943 376 923
Email: info@diprax.es

